

---

# Exploitability Minimization in Games and Beyond

---

**Denizalp Goktas**  
Department of Computer Science  
Brown University  
Providence, RI 02906, USA  
denizalp\_goktas@brown.edu

**Amy Greenwald**  
Brown University  
Providence, RI 02906, USA  
amy\_greenwald@brown.edu

## Abstract

Pseudo-games are a natural and well-known generalization of normal-form games, in which the actions taken by each player affect not only the other players' payoffs, as in games, but also the other players' strategy sets. The solution concept par excellence for pseudo-games is the generalized Nash equilibrium (GNE), i.e., a strategy profile at which each player's strategy is feasible and no player can improve their payoffs by unilaterally deviating to another strategy in the strategy set determined by the other players' strategies. The computation of GNE in pseudo-games has long been a problem of interest, due to applications in a wide variety of fields, from environmental protection to logistics to telecommunications. Although computing GNE is PPAD-hard in general, it is still of interest to try to compute them in restricted classes of pseudo-games. One approach is to search for a strategy profile that minimizes exploitability, i.e., the sum of the regrets across all players. As exploitability is nondifferentiable in general, developing efficient first-order methods that minimize it might not seem possible at first glance. We observe, however, that the exploitability-minimization problem can be recast as a min-max optimization problem, and thereby obtain polynomial-time first-order methods to compute a refinement of GNE, namely the variational equilibria (VE), in convex-concave cumulative regret pseudo-games with jointly convex constraints. More generally, we also show that our methods find the stationary points of the exploitability in polynomial time in Lipschitz-smooth pseudo-games with jointly convex constraints. Finally, we demonstrate in experiments that our methods not only outperform known algorithms, but that even in pseudo-games where they are not guaranteed to converge to a GNE, they may do so nonetheless, with proper initialization.

## 1 Introduction

Nash equilibrium [1] is the canonical solution concept used to predict the outcome of models of rational agents known as games. A **game** comprises a set of players, each of whom simultaneously chooses a strategy (or action) from a strategy set, and then receives a payoff based on all the players' choices. A **Nash equilibrium (NE)** is a strategy profile, i.e., a collection of strategies, one per player, from which no player can improve their payoff via a unilateral deviation.

Recently, the literature on NE has expanded beyond classic economic applications to the question of its computation, a problem known as the **Nash equilibrium problem (NEP)** [2, 3]. Unfortunately, it is unlikely that there exists an efficient algorithm to compute NE, as NEP is PPAD-complete, i.e., NEP is equivalent to the problem of computing solutions to a class of fixed-point problems known as PPAD [4], which are believed to be computationally intractable [5, 6, 7]. Nonetheless, there has been a great deal of recent progress developing *efficient* algorithms to compute NE in special classes of games, such as two-player zero-sum [8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25,

[26, 27, 28, 29, 30, 31], potential [32, 33, 34], and monotone (or, more generally, variationally stable) games [35, 36, 37, 38, 39, 40, 41]. Interest in two-player zero-sum games, for example, stems in part from emerging applications in machine learning, e.g., the training of GANs [42, 43].

A natural generalization of games are **pseudo-games** or **abstract economies**, first introduced by Arrow and Debreu [44] in the context of markets, in which the actions taken by each player affect not only the other players' payoffs, as in games, but also the other players' strategy sets. In other words, players (simultaneously) take actions that can restrict the other players' strategy sets. Such a model is not technically a game, giving rise to the pseudo-game terminology. Pseudo-games generalize games, and hence are even more widely applicable. Some recently studied applications include adversarial classification [45, 46], energy resource allocation [47, 48], environmental protection [49, 50], cloud computing [51, 52], adversarial classification, ride sharing services [53], transportation [54], wireless and network communication [55, 56].

The solution concept par excellence for pseudo-games is the **generalized Nash equilibrium (GNE)** [44, 57, 58], i.e., a strategy profile at which each player's strategy is feasible and no player can improve their payoffs by unilaterally deviating to another strategy in the strategy set determined by the other players' strategies. The aforementioned applications speak to the importance of developing algorithms that can approximate GNEs efficiently in the largest class of pseudo-games possible. Work in this direction, on the **generalized Nash equilibrium problem (GNEP)**, is progressing; see, for example, [59, 57, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77]. Nonetheless, there are still few, if any [78], GNE-finding algorithms with computational guarantees, even for restricted classes of pseudo-games.

**Exploitability**, or the Nikoïda-Isoda potential [79], is defined as the sum of the players' payoff-maximizing unilateral deviations w.r.t. a given strategy profile. Minimizing exploitability is a logical approach to computing GNE, especially in cases where exploitability is convex, such as in the pseudo-games that result from replacing each player's payoff function in a monotone pseudo-game by a second-order Taylor approximation [80]. When the players' payoffs are also Lipschitz-smooth and strongly concave (in their own action), this approximation can be quite good, because the error in the approximation will be bounded by the Lipschitz-smoothness and strong concavity constant. *Minimizing exploitability can thus be an effective way of finding GNEs in pseudo-games; however, to our knowledge, no convergence rates for this approach are known, and few methods have been proposed for pseudo-games whose exploitability is non-convex.*

In this paper, we develop efficient exploitability-minimization algorithms that converge to variational equilibrium (VE), a refinement of GNE, exactly in a large class of pseudo-games with jointly convex constraints (which includes, but is not limited to, two-player zero-sum,  $n$ -player pairwise zero-sum, and a large class of monotone and bilinear pseudo-games, as well as Cournot oligopoly games); and approximately, in Lipschitz-smooth pseudo-games with jointly convex constraints, where exact computation is intractable. Our algorithms apply not only to games with discrete action spaces but also to games with continuous action spaces; previous exploitability-minimization algorithms concern only finite games [81, 82].

The **cumulative regret** of two strategy profiles is defined as the sum, across all players, of the change in utility due to unilateral deviations from one strategy profile to the other. Our algorithms and their analysis rely on the following key insights: assuming jointly convex constraints (i.e., symmetric and convex-valued joint constraint correspondences) the exploitability-minimization problem is equivalent to solving a cumulative regret min-max optimization problem, which although non-convex-concave in general can nonetheless be solved by **gradient descent ascent (GDA)** methods<sup>1</sup> [25, 85] using a parametric variant of Moreau's envelope theorem that we introduce (Theorem 4.1). We apply this logic to develop two algorithms for Lipschitz-smooth pseudo-games with jointly convex constraints. *To the best of our knowledge, this makes our theft exploitability-minimization methods with convergence rate guarantees in this class of pseudo-games.*

The first (EDA; Algorithm 1) is an extragradient method that converges in average iterates to an  $\varepsilon$ -VE, and hence an  $\varepsilon$ -GNE, in  $O(1/\varepsilon)$  iterations in pseudo-games with convex-concave cumulative regret, where  $\varepsilon$  is the exploitability of the game (Theorem 3.4). This class of pseudo-games includes zero-sum, potential, Cournot, a large class of monotone pseudo-games, and a class of bilinear

---

<sup>1</sup>When the objective function is convex-concave, a saddle point is guaranteed to exist, in which case this optimization problem can be solved using simultaneous-GDA-style algorithms (e.g., [21, 83, 84]).

pseudo-games, namely those with convex second-order approximations. Our second algorithm (ADA; Algorithm 2) is a nested GDA algorithm, whose best iterate converges more generally to a stationary point of (regularized) exploitability in all Lipschitz-smooth pseudo-games with jointly convex constraints at the slightly slower rate of  $O(\log(1/\varepsilon)/\varepsilon)$  (Theorem 4.2). When the (regularized) exploitability is additionally invex, our method also converges to a GNE in best iterates at the same rate. This convergence can be strengthened to convergence in last iterates in  $O(\log(1/\varepsilon)^2)$  iterations in strongly-convex exploitability pseudo-games and in a certain class of pseudo-games with non-convex exploitability (Theorem 4.3).

Pseudo-games with jointly convex constraints are of interest in decentralized resource allocation problems with feasibility (e.g., supply) constraints. Feasibility constraints are almost always joint, and often also jointly convex, since we generally require the sum of the allocations to be less than or equal to the supply. One of the many examples of such pseudo-games is wireless and network communication, where agents communicate packets across a shared network, with limited capacities [55]. The experiments we run in this paper suggest that our algorithms have the potential to yield improved solutions to such pseudo-games as compared to other known approaches, and thus open up avenues for practical applications of our work in the future.

**Related Work** Following Arrow and Debreu’s introduction of GNE, Rosen [86] initiated the study of the mathematical and computational properties of GNE in pseudo-games with jointly convex constraints, proposing a projected gradient method to compute GNE. Thirty years later, Uryas’ev and Rubinstein [87] developed the first relaxation methods for finding GNEs, which were improved upon in subsequent works [88, 89]. Two other types of algorithms were also introduced to the literature: Newton-style methods [59, 64, 68, 69, 70, 90] and interior-point potential methods [90]. Many of these approaches are based on minimizing the exploitability of the pseudo-game, but others use variational inequality [91, 92] and Lemke methods [93].

More recently, novel methods that transform GNEP to NEP were analyzed. These models take the form of either exact penalization methods, which lift the constraints into the objective function via a penalty term [72, 73, 76, 77, 94], or augmented Lagrangian methods [71, 74, 76, 95], which do the same, augmented by dual Lagrangian variables. Using these methods, Jordan, Lin, and Zampetakis [78] provide the first convergence rates to a  $\varepsilon$ -GNE in monotone (resp. strongly monotone) pseudo-games with jointly affine constraints in  $\tilde{O}(1/\varepsilon)$  ( $\tilde{O}(1/\sqrt{\varepsilon})$ ) iterations. These algorithms, despite being highly efficient in theory, are numerically unstable in practice [78]. Nearly all of the aforementioned approaches concerned pseudo-games with jointly convex constraints.

Exploitability minimization has also been a valuable tool in multi-agent reinforcement learning; algorithms in this literature that aim to minimize exploitability are known as exploitability descent algorithms [81]. Lockhart et al. [81] analyzed exploitability descent in two-player, zero-sum, extensive-form games with finite action spaces. Variants of exploitability-descent have also been combined with entropic regularization and homotopy methods to solve for NE in large games [82].

## 2 Preliminaries

**Notation** We use calligraphic uppercase letters to denote sets (e.g.,  $\mathcal{X}$ ); bold lowercase letters to denote vectors (e.g.,  $\mathbf{p}, \boldsymbol{\pi}$ ); bold uppercase letters to denote matrices (e.g.,  $\mathbf{X}$ ) and lowercase letters to denote scalar quantities (e.g.,  $x, \delta$ ). We denote the  $i$ th row vector of a matrix (e.g.,  $\mathbf{X}$ ) by the corresponding bold lowercase letter with subscript  $i$  (e.g.,  $\mathbf{x}_i$ ). Similarly, we denote the  $j$ th entry of a vector (e.g.,  $\mathbf{p}$  or  $\mathbf{x}_i$ ) by the corresponding Roman lowercase letter with subscript  $j$  (e.g.,  $p_j$  or  $x_{ij}$ ). We denote functions by a letter determined by the value of the function, e.g.,  $f$  if the mapping is scalar-valued,  $\mathbf{f}$  if the mapping is vector-valued, and  $\mathcal{F}$  if the mapping is set-valued. We denote the set of integers  $\{1, \dots, n\}$  by  $[n]$ , the set of natural numbers by  $\mathbb{N}$ , the set of real numbers by  $\mathbb{R}$ , and the positive and strictly positive elements of a set by a  $+$  and  $++$  subscript, respectively, e.g.,  $\mathbb{R}_+$  and  $\mathbb{R}_{++}$ . We define the gradient  $\nabla_{\mathbf{x}} : C^1(\mathcal{X}) \rightarrow C^0(\mathcal{X})$  as the operator which takes as input a functional  $f : \mathcal{X} \rightarrow \mathbb{R}$ , and outputs a vector-valued function consisting of the partial derivatives of  $f$  w.r.t.  $\mathbf{x}$ . We denote the orthogonal projection onto a set  $C$  by  $\Pi_C$ , i.e.,  $\Pi_C(\mathbf{x}) = \arg \min_{\mathbf{y} \in C} \|\mathbf{x} - \mathbf{y}\|_2^2$ . Finally, we write  $\mathbb{1}_{\mathcal{X}}(\mathbf{a})$  to denote the indicator function of the set  $\mathcal{X}$ , i.e.,  $\mathbb{1}_{\mathcal{X}}(\mathbf{x}) = 0$  if  $\mathbf{x} \in \mathcal{X}$  and  $\mathbb{1}_{\mathcal{X}}(\mathbf{x}) = \infty$  if  $\mathbf{x} \notin \mathcal{X}$ .

A **pseudo-game** [44]  $\mathcal{G} \doteq (n, \mathcal{A}, \mathcal{X}, \mathbf{h}, \mathbf{u})$  comprises  $n \in \mathbb{N}_+$  players, each  $i \in [n]$  of whom chooses an  $\mathbf{a}_i$  from an action space  $\mathcal{A}_i$ . We denote the players' joint action space by  $\mathcal{A} = \times_{i \in [n]} \mathcal{A}_i$ . Each player  $i$  aims to maximize their continuous utility  $u_i : \mathcal{A} \rightarrow \mathbb{R}$ , which is concave in  $\mathbf{a}_i$ , by choosing a feasible action from a set of actions  $\mathcal{X}_i(\mathbf{a}_{-i}) \subseteq \mathcal{A}_i$  determined by the actions  $\mathbf{a}_{-i} \in \mathcal{A}_{-i} \subset \mathbb{R}^m$  of the other players, where  $\mathcal{X}_i : \mathcal{A}_{-i} \rightrightarrows \mathcal{A}_i$  is a non-empty, continuous, compact- and convex-valued action correspondence, which for convenience we represent as  $\mathcal{X}_i(\mathbf{a}_{-i}) = \{\mathbf{a}_i \in \mathcal{A}_i \mid h_{ik}(\mathbf{a}_i, \mathbf{a}_{-i}) \geq \mathbf{0}, \text{ for all } k \in [d]\}$ , where for all  $i \in [n]$ , and  $k \in [d]$ ,  $h_{ik}$  is a continuous and concave function in  $\mathbf{a}_i$ , which defines the constraints. We denote the product of the feasible action correspondences of all players by  $\mathcal{X}(\mathbf{a}) = \times_{i \in [n]} \mathcal{X}_i(\mathbf{a}_{-i})$ , which we note is guaranteed to be non-empty, continuous, and compact-valued, but not necessarily convex-valued. Additionally, overloading notation, we define the set of jointly feasible strategy profiles  $\mathcal{X} = \{\mathbf{a} \in \mathcal{A} \mid h_{ik}(\mathbf{a}) \geq \mathbf{0}, \text{ for all } i \in [n], k \in [d]\}$ .

A two player pseudo-game is called **zero-sum** if for all  $\mathbf{a} \in \mathcal{A}$ ,  $u_1(\mathbf{a}) = -u_2(\mathbf{a})$ . A pseudo-game is called **monotone** if for all  $\mathbf{a}, \mathbf{b} \in \mathcal{A}$   $\sum_{i \in [n]} (\nabla_{\mathbf{a}_i} u_i(\mathbf{a}) - \nabla_{\mathbf{a}_i} u_i(\mathbf{b}))^T (\mathbf{a} - \mathbf{b}) \leq 0$ . A pseudo-game is said to have **joint constraints** if there exists a function  $\mathbf{g} : \mathcal{A} \rightarrow \mathbb{R}^d$  s.t.  $\mathbf{g} = \mathbf{h}_1 = \dots = \mathbf{h}_d$ . If additionally, for all  $k \in [d]$ ,  $g_k(\mathbf{a})$  is concave in  $\mathbf{a}$ , then we say that the pseudo-game has **jointly convex constraints**, as this assumption implies that  $\mathcal{X}$  is a convex set. A **game [1]** is a pseudo-game where, for all players  $i \in [n]$ ,  $\mathcal{X}_i$  is a constant correspondence, i.e., for all players  $i \in [n]$ ,  $\mathcal{X}_i(\mathbf{a}_{-i}) = \mathcal{X}_i(\mathbf{b}_{-i})$ , for all  $\mathbf{a}, \mathbf{b} \in \mathcal{A}$ . Moreover, while  $\mathcal{X}(\mathbf{a})$  is convex, for all action profiles  $\mathbf{a} \in \mathcal{A}$ ,  $\mathcal{X}$  is not guaranteed to be convex unless one assumes joint convexity.

Given a pseudo-game  $\mathcal{G}$ , an  $\varepsilon$ -**generalized Nash equilibrium (GNE)** is strategy profile  $\mathbf{a}^* \in \mathcal{X}(\mathbf{a}^*)$  s.t. for all  $i \in [n]$  and  $\mathbf{a}_i \in \mathcal{X}_i(\mathbf{a}_{-i}^*)$ ,  $u_i(\mathbf{a}^*) \geq u_i(\mathbf{a}_i, \mathbf{a}_{-i}^*) - \varepsilon$ . An  $\varepsilon$ -**variational equilibrium (VE)** (or **normalized GNE**) of a pseudo-game is a strategy profile  $\mathbf{a}^* \in \mathcal{X}(\mathbf{a}^*)$  s.t. for all  $i \in [n]$  and  $\mathbf{a} \in \mathcal{X}$ ,  $u_i(\mathbf{a}^*) \geq u_i(\mathbf{a}_i, \mathbf{a}_{-i}^*) - \varepsilon$ . We note that in the above definitions, one could just as well write  $\mathbf{a}^* \in \mathcal{X}(\mathbf{a}^*)$  as  $\mathbf{a}^* \in \mathcal{X}$ , as any fixed point of the joint action correspondence is also a jointly feasible action profile, and vice versa. A GNE (VE) is an  $\varepsilon$ -GNE (VE) with  $\varepsilon = 0$ . Under our assumptions, while GNE are guaranteed to exist in all pseudo-games by Arrow and Debreu's lemma on abstract economies [44], VE are only guaranteed to exist in pseudo-games with jointly convex constraints [65]. Note that the set of  $\varepsilon$ -VE of a pseudo-game is a subset of the set of the  $\varepsilon$ -GNE, as  $\mathcal{X}(\mathbf{a}^*) \subseteq \mathcal{X}$ , for all  $\mathbf{a}^*$  which are GNE of  $\mathcal{G}$ . The converse, however, is not true, unless  $\mathcal{A} \subseteq \mathcal{X}$ . Further, when  $\mathcal{G}$  is a game, GNE and VE coincide; we refer to this set simply as NE.

**Mathematical Preliminaries** Finally, we define several mathematical concepts that are relevant to our convergence proofs. Given  $A \subset \mathbb{R}^n$ , the function  $f : \mathcal{A} \rightarrow \mathbb{R}$  is said to be  $\ell_f$ -**Lipschitz-continuous** iff  $\forall \mathbf{x}_1, \mathbf{x}_2 \in \mathcal{X}$ ,  $\|f(\mathbf{x}_1) - f(\mathbf{x}_2)\| \leq \ell_f \|\mathbf{x}_1 - \mathbf{x}_2\|$ . If the gradient of  $f$  is  $\ell_{\nabla f}$ -Lipschitz-continuous, we then refer to  $f$  as  $\ell_{\nabla f}$ -**Lipschitz-smooth**. A function  $f : \mathcal{X} \rightarrow \mathbb{R}$  is said to be **invex** w.r.t. a function  $\mathbf{h} : \mathcal{X} \times \mathcal{X} \rightarrow \mathcal{X}$  if  $f(\mathbf{x}) - f(\mathbf{y}) \geq \mathbf{h}(\mathbf{x}, \mathbf{y}) \cdot \nabla f(\mathbf{y})$ , for all  $\mathbf{x}, \mathbf{y} \in \mathcal{X}$ . A function  $f : \mathcal{X} \rightarrow \mathbb{R}$  is **convex** if it is invex w.r.t.  $\mathbf{h}(\mathbf{x}, \mathbf{y}) = \mathbf{x} - \mathbf{y}$  and concave if  $-f$  is convex. A function  $f : \mathcal{X} \rightarrow \mathbb{R}$  is  $\mu$ -**strongly convex (SC)** if  $f(\mathbf{x}_1) \geq f(\mathbf{x}_2) + \langle \nabla_{\mathbf{x}} f(\mathbf{x}_2), \mathbf{x}_1 - \mathbf{x}_2 \rangle + \mu/2 \|\mathbf{x}_1 - \mathbf{x}_2\|^2$ , and  $\mu$ -**strongly concave** if  $-f$  is  $\mu$ -strongly convex.

### 3 From Exploitability Minimization To Min-Max Optimization

In this section, we reformulate the exploitability minimization problem as a min-max optimization problem. This reformulation is a consequence of the following observation, which is key to our analysis: *In pseudo-games for which a VE exists, e.g., pseudo-games with jointly convex constraints, the quasi-optimization problem of minimizing exploitability, whose solutions characterize the set of GNEs, reduces to the reduces to a standard min-max optimization problem (with independent constraint sets), which characterizes the set of VEs, a subset of the GNEs.* This new perspective allows us to efficiently solve GNEP by computing VEs in a large class of pseudo-games as an immediate consequence of known results on the computation of saddle points in convex-concave min-max optimization problems.

Given a pseudo-game  $\mathcal{G}$ , we define the **regret** felt by any player  $i \in [n]$  for an action  $\mathbf{a}_i$  as compared to another action  $\mathbf{b}_i$ , given the action profile  $\mathbf{a}_{-i}$  of other players, as follows:  $\text{Regret}_i(\mathbf{a}_i, \mathbf{b}_i; \mathbf{a}_{-i}) = u_i(\mathbf{b}_i, \mathbf{a}_{-i}) - u_i(\mathbf{a}_i, \mathbf{a}_{-i})$ . Additionally, the **cumulative regret**, or the **Nikaido-Isoda function**,  $\psi : \mathcal{A} \times \mathcal{A} \rightarrow \mathbb{R}$  between two action profiles  $\mathbf{a} \in \mathcal{X}$  and  $\mathbf{b} \in \mathcal{X}$

across all players in a pseudo-game is given by  $\psi(\mathbf{a}, \mathbf{b}) = \sum_{i \in [n]} \text{Regret}_i(\mathbf{a}_i, \mathbf{b}_i; \mathbf{a}_{-i})$ . Further, the **exploitability**, or **Nikaido-Isoda potential function**,  $\varphi: \mathcal{A} \rightarrow \mathbb{R}$  of an action profile  $\mathbf{a}$  is defined as  $\varphi(\mathbf{a}) = \sum_{i \in [n]} \max_{\mathbf{b}_i \in \mathcal{X}_i(\mathbf{a}_{-i})} \text{Regret}_i(\mathbf{a}_i, \mathbf{b}_i; \mathbf{a}_{-i})$  [57]. Notice that the max is taken over  $\mathcal{X}_i(\mathbf{a}_{-i})$ , since a player can only deviate within the set of available strategies.

A well-known [57]<sup>2</sup> result is that any unexploitable strategy profile in a pseudo-game is a GNE.

**Lemma 3.1.** *Given a pseudo-game  $\mathcal{G}$ , for all  $\mathbf{a} \in \mathcal{A}$ ,  $\varphi(\mathbf{a}) \geq 0$ . Additionally, a strategy profile  $\mathbf{a}^* \in \mathcal{X}(\mathbf{a}^*)$  is a GNE iff it achieves the lowerbound, i.e.,  $\varphi(\mathbf{a}^*) = 0$ .*

This lemma tells us that we can reformulate GNEP as the quasi-optimization problem of minimizing exploitability, i.e.,  $\min_{\mathbf{a} \in \mathcal{X}(\mathbf{a})} \varphi(\mathbf{a})$ . Here, “quasi” refers to the fact that a solution to this problem is both a minimizer of  $\varphi$  and a fixed point  $\mathbf{a}^*$  s.t.  $\mathbf{a}^* \in \mathcal{X}(\mathbf{a}^*)$ <sup>3</sup>. Despite this reformulation of GNEP in terms of exploitability, no exploitability-minimization algorithms with convergence rate guarantees are known. The unexploitability (!) of exploitability may be due to the fact that it is not Lipschitz-smooth. The key insight that allows us to obtain convergence guarantees is that we treat the GNE problem not as a quasi-minimization problem, but rather as a quasi-min-max optimization problem, namely  $\min_{\mathbf{a} \in \mathcal{X}(\mathbf{a})} \varphi(\mathbf{a}) = \min_{\mathbf{a} \in \mathcal{X}(\mathbf{a})} \max_{\mathbf{b} \in \mathcal{X}(\mathbf{a})} \psi(\mathbf{a}, \mathbf{b})$ .

**Observation 3.2.** *Given a pseudo-game  $\mathcal{G}$ , for all  $\mathbf{a} \in \mathcal{A}$ ,  $\varphi(\mathbf{a}) = \max_{\mathbf{b} \in \mathcal{X}(\mathbf{a})} \psi(\mathbf{a}, \mathbf{b})$ .*

*Proof.* The per-player maximum operators can be pulled out of the sum, as the  $i$ th player’s best action in hindsight is independent of the other players’ best actions in hindsight, since the action profile  $\mathbf{a}$  is fixed:

$$\varphi(\mathbf{a}) = \sum_{i \in [n]} \max_{\mathbf{b}_i \in \mathcal{X}_i(\mathbf{a}_{-i})} \text{Regret}_i(\mathbf{a}_i, \mathbf{b}_i; \mathbf{a}_{-i}) = \max_{\mathbf{b} \in \mathcal{X}(\mathbf{a})} \sum_{i \in [n]} \text{Regret}_i(\mathbf{a}_i, \mathbf{b}_i; \mathbf{a}_{-i}) = \max_{\mathbf{b} \in \mathcal{X}(\mathbf{a})} \psi(\mathbf{a}, \mathbf{b})$$

That is, the optimization problem in the  $i$ th summand is independent of the optimization problem in the other summands, e.g., for any  $\mathbf{y} \in [0, 1/2]^2$ ,  $\max_{x_1 \in [0, 1]: x_1 - y_1 \geq 0} \{x_1 y_1\} + \max_{x_2 \in [0, 1]: x_2 - y_2 \geq 0} \{x_2 y_2\} = \max_{\mathbf{x} \in [0, 1]^2: \mathbf{x} - \mathbf{y} \geq 0} x_1 y_1 + x_2 y_2$ .  $\square$

If we restrict our attention to VEs, a subset of GNEs, VE exploitability—hereafter *exploitability for short*—is conveniently expressed as  $\varphi(\mathbf{a}) = \max_{\mathbf{b} \in \mathcal{X}} \psi(\mathbf{a}, \mathbf{b})$ . When a VE exists, e.g., in pseudo-games with jointly convex constraints, this exploitability is guaranteed to achieve the lower bound of 0 for some  $\mathbf{a} \in \mathcal{X}$ . In such cases, formulation of exploitability minimization as a quasi-min-max optimization problem reduces to a standard min-max optimization problem, namely  $\min_{\mathbf{a} \in \mathcal{X}} \max_{\mathbf{b} \in \mathcal{X}} \psi(\mathbf{a}, \mathbf{b})$ , which characterizes VEs.

This problem is well understood when  $\psi$  is a convex-concave objective function [21, 83, 84, 96]. Furthermore, the cumulative regret  $\psi$  is indeed convex-concave, i.e., convex in  $\mathbf{a}$  and concave in  $\mathbf{b}$ , in many pseudo-games of interest: e.g., two-player zero-sum,  $n$ -player pairwise zero-sum, and a large class of monotone and bilinear pseudo-games, as well as Cournot oligopoly games.

Going forward, we restrict our attention to pseudo-games satisfying the following assumptions. Lipschitz-smoothness is a standard assumption in the convex optimization literature [97], while joint convexity is a standard assumption in the GNE literature [57]. Furthermore, these are weaker assumptions than ones made to obtain the few known results on convergence rates to GNEs [78].

**Assumption 3.3.** *The pseudo-game  $\mathcal{G}$  has joint constraints  $\mathbf{g}: \mathcal{A} \rightarrow \mathbb{R}^d$ , and additionally, 1. (Lipschitz smoothness and concavity) for any player  $i \in [n]$ , their utility function  $u_i$  is  $\ell_{\nabla_{\mathbf{a}_i}}$ -Lipchitz smooth; 2. (Joint Convexity)  $\mathbf{g}$  is component-wise concave.*

Using the simple observation that every VE of a pseudo-game is the solution to a min-max optimization problem we introduce our first algorithm (EDA; Algorithm 1), an extragradient method [83]. The algorithm works by interleaving extragradient ascent and descent steps: at iteration  $t$ , given  $\mathbf{a}^{(t)}$ , it ascends on  $\psi(\mathbf{a}^{(t)}, \cdot)$ , thereby generating a better response  $\mathbf{b}^{(t+1)}$ , and then descends on  $\psi(\cdot, \mathbf{b}^{(t+1)})$ , thereby decreasing exploitability. We combine several known results about the

<sup>2</sup>yet hard to exploit(!)

<sup>3</sup>This problem could also be formulated as minimizing over the set of jointly feasible actions, i.e.,  $\min_{\mathbf{a} \in \mathcal{X}} \varphi(\mathbf{a})$ ; however, without assuming joint convexity,  $\mathcal{X}$  is not necessarily convex.

---

**Algorithm 1** Extragradient descent ascent (EDA)

---

**Inputs:**  $n, \mathbf{u}, \mathcal{X}, \eta, T, \mathbf{a}^{(0)}, \mathbf{b}^{(0)}$ **Outputs:**  $(\mathbf{a}^{(t)}, \mathbf{b}^{(t)})_{t=0}^T$ 

- 1: **for**  $t = 0, \dots, T - 1$  **do**
  - 2:      $\mathbf{a}^{(t+1/2)} = \Pi_{\mathcal{X}} [\mathbf{a}^{(t)} - \eta \nabla_{\mathbf{a}} \psi(\mathbf{a}^{(t)}, \mathbf{b}^{(t)})]$
  - 3:      $\mathbf{b}^{(t+1/2)} = \Pi_{\mathcal{X}} [\mathbf{b}^{(t)} + \eta \nabla_{\mathbf{b}} \psi(\mathbf{a}^{(t)}, \mathbf{b}^{(t)})]$
  - 4:      $\mathbf{a}^{(t+1)} = \Pi_{\mathcal{X}} [\mathbf{a}^{(t)} - \eta \nabla_{\mathbf{a}} \psi(\mathbf{a}^{(t+1/2)}, \mathbf{b}^{(t+1/2)})]$
  - 5:      $\mathbf{b}^{(t+1)} = \Pi_{\mathcal{X}} [\mathbf{b}^{(t)} + \eta \nabla_{\mathbf{b}} \psi(\mathbf{a}^{(t+1/2)}, \mathbf{b}^{(t+1/2)})]$
  - 6: **return**  $(\mathbf{a}^{(t)}, \mathbf{b}^{(t)})_{t=0}^T$
- 

convergence of extragradient descent methods in min-max optimization problems to obtain the following convergence guarantees for EDA in pseudo-games<sup>4</sup>

**Theorem 3.4** (Convergence rate of EDA). *Consider a pseudo-game  $\mathcal{G}$  with convex-concave cumulative regret that satisfies Assumption 3.3. Suppose that EDA (Algorithm 1) is run with  $\eta < 1/\ell_{\nabla\psi}$ , and that doing so generates the sequence of iterates  $(\mathbf{a}^{(t)}, \mathbf{b}^{(t)})_{t=0}^T$ . Let  $\overline{\mathbf{a}}^{(T)} = 1/T \sum_{t=1}^T \mathbf{a}^{(t)}$  and  $\overline{\mathbf{b}}^{(T)} = 1/T \sum_{t=1}^T \mathbf{b}^{(t)}$ . Then the following convergence rate to a VE, i.e., to zero exploitability holds:  $\max_{\mathbf{b} \in \mathcal{X}} \psi(\overline{\mathbf{a}}^{(T)}, \mathbf{b}) - \max_{\mathbf{a} \in \mathcal{X}} \psi(\mathbf{a}, \overline{\mathbf{b}}^{(T)}) \leq 1/T (d \ell_{\nabla\psi})$ , where  $d = \max_{(\mathbf{a}, \mathbf{b}) \in \mathcal{X} \times \mathcal{X}} \|(\mathbf{a}, \mathbf{b}) - (\mathbf{a}^{(0)}, \mathbf{b}^{(0)})\|_2^2$ . If, additionally,  $\psi$  is  $\mu$ -strongly-convex- $\mu$ -strongly-concave, and the learning rate  $\eta = 1/4\ell_{\psi}$ , then the following convergence bound also holds:  $\max_{\mathbf{b} \in \mathcal{X}} \psi(\overline{\mathbf{a}}^{(T)}, \mathbf{b}) - \max_{\mathbf{a} \in \mathcal{X}} \psi(\mathbf{a}, \overline{\mathbf{b}}^{(T)}) \leq d\ell_{\psi}^2/\mu (1 - \mu/4\ell_{\psi})^T$ .*

**Remark 3.5.** *If the players' utility functions have Lipschitz-continuous third-order derivatives, then convergence in last iterates can be obtained in  $O(1/\varepsilon^2)$  iterations [98].*

Since the complexity of two-player zero-sum convex-concave games, a special case of our model, is  $\Omega(1/\varepsilon)$ , the iteration complexity we derive is optimal. The exploitability minimization via EDA is thus an optimal approach to GNEP in convex-concave cumulative regret pseudo-games. Additionally, since pseudo-games generalize games, our results show that the complexity of this class of pseudo-games is the same as that of the corresponding games.

## 4 Pseudo-Games with Jointly Convex Constraints

More generally, the exploitability minimization problem is equivalent to a non-convex-concave min-max optimization problem, i.e., cumulative regret is non-convex-concave. In such cases, a minimax theorem does not hold, which precludes the existence of a saddle point, making the problem much harder. Solving non-convex-concave min-max optimization problems is NP-hard in general [99], so we instead set as our goal finding a (first-order) stationary point  $\mathbf{a}^* \in \mathcal{X}$  of the exploitability  $\varphi$ , i.e., a point at which first-order deviations cannot decrease the exploitability, which we show can be found in polynomial-time. Note that any stationary point  $\mathbf{a}^*$  of the exploitability is a  $\varphi(\mathbf{a}^*)$ -GNE of the associated pseudo-game.

In recent years, a variety of methods have been developed that could be applied to finding stationary points of the exploitability [19, 25, 26, 27, 31]. Using the most efficient of these methods, one could obtain convergence to an  $\varepsilon$ -stationary point of the exploitability in  $O(1/\varepsilon^6)$  iterations [19]. However, as we will see, this rate would be very slow, and the convergence metric, not very strong, e.g., convergence in expected iterates. Instead, we demonstrate how to leverage the structure of the exploitability-minimization problem to obtain much faster convergence rates.

Unfortunately, the exploitability associated with the min-max characterization of pseudo-games with joint constraints is non-differentiable in general. This fact poses an obstacle when trying to design efficient algorithms that find its stationary points. However, by exploiting the structure of cumulative regret, we can regularize it to obtain a smooth objective. Observe the following: if

---

<sup>4</sup>All omitted proofs can be found in Appendix B.

$\mathbf{a}^* \in \arg \min_{\mathbf{a} \in \mathcal{X}} \max_{\mathbf{b} \in \mathcal{X}} \psi(\mathbf{a}, \mathbf{b})$ , then  $\mathbf{a}^* \in \arg \max_{\mathbf{b} \in \mathcal{X}} \psi(\mathbf{a}^*, \mathbf{b})$ . In other words,  $\mathbf{b}^* = \mathbf{a}^*$  is a solution to the inner maximization problem. As a result, we can penalize exploitability in proportion to the distance between  $\mathbf{a}$  and  $\mathbf{b}$ , while still ensuring that this penalized exploitability is minimized at a VE. We thus optimize the  $\alpha$ -regularized cumulative regret  $\psi_\alpha : \mathcal{A} \times \mathcal{A} \rightarrow \mathbb{R}$ , defined as  $\psi_\alpha(\mathbf{a}, \mathbf{b}) \doteq \psi(\mathbf{a}, \mathbf{b}) - \frac{\alpha}{2} \|\mathbf{a} - \mathbf{b}\|_2^2$ , whose associated  $\alpha$ -regularized exploitability  $\varphi_\alpha : \mathcal{A} \rightarrow \mathbb{R}$  is given by  $\varphi_\alpha(\mathbf{a}) = \max_{\mathbf{b} \in \mathcal{X}} \psi_\alpha(\mathbf{a}, \mathbf{b})$ . Von Heusinger and Kanzow show that a strategy profile  $\mathbf{a}^*$  has no  $\alpha$ -regularized-exploitability, i.e.,  $\varphi_\alpha(\mathbf{a}^*) = 0$ , iff  $\mathbf{a}^*$  is a VE for all  $\alpha > 0$  (Theorem 3.3 [65]).

To better understand the smoothness properties of the regularized exploitability, we present the **parametric Moreau envelope**, a Moreau envelope [100] in which the objective function is a function of the point w.r.t. which we regularize the objective function, which in our case is cumulative regret. Our next theorem is a generalization of the Moreau envelope theorem [100], which shows that  $\alpha$ -regularized exploitability is Lipschitz-smooth, by allowing us to see  $\varphi_\alpha$  as a parametric Moreau envelope for  $\psi$ , an observation which to our knowledge has not been made in previous work. This Lipschitz-smoothness of  $\varphi_\alpha$  gives rise to the possibility of deriving algorithms that converge to a stationary point of  $\varphi_\alpha$ , the key idea underlying our second algorithm (ADA; Algorithm 2).

**Theorem 4.1** (Parametric Moreau Envelope Theorem). *Given  $\alpha > 0$ , consider the parametric Moreau envelope  $\varphi_\alpha(\mathbf{a}) \doteq \max_{\mathbf{b} \in \mathcal{X}} \left\{ \psi(\mathbf{a}, \mathbf{b}) - \frac{\alpha}{2} \|\mathbf{a} - \mathbf{b}\|_2^2 \right\}$  and the associated proximal operator  $\{\mathbf{b}^*(\mathbf{a})\} \doteq \arg \max_{\mathbf{b} \in \mathcal{X}} \left\{ \psi(\mathbf{a}, \mathbf{b}) - \frac{\alpha}{2} \|\mathbf{a} - \mathbf{b}\|_2^2 \right\}$ , where  $\psi$  is  $\ell_{\nabla \psi}$ -Lipschitz smooth. Then  $\varphi_\alpha(\mathbf{a})$  is  $\left( \ell_{\nabla \psi} + \frac{\ell_{\nabla \psi}^2}{\alpha} \right)$ -Lipschitz-smooth, with gradients  $\nabla_{\mathbf{a}} \varphi_\alpha(\mathbf{a}) = \nabla_{\mathbf{a}} \psi(\mathbf{a}, \mathbf{b}^*(\mathbf{a})) - \alpha(\mathbf{a} - \mathbf{b}^*(\mathbf{a}))$ .*

Next, we formalize the definition of a stationary point. As the exploitability  $\varphi_\alpha$  is in general non-convex, and the optimization problem  $\min_{\mathbf{a} \in \mathcal{X}} \varphi_\alpha(\mathbf{a})$  is constrained, the first-order condition  $\nabla \varphi_\alpha(\mathbf{a}) = 0$  is not sufficient for stationarity, since a solution on the boundary of the constraint set could also be first-order stationary. As a result, we use proximal mappings in our definition. In particular, we reformulate the constrained exploitability minimization problem as the unconstrained minimization problem  $\min_{\mathbf{a} \in \mathbb{R}^{nm}} \varphi_\alpha(\mathbf{a}) + \mathbb{1}_{\mathcal{X}}(\mathbf{a})$ . In this optimization problem,  $\varphi_\alpha$  is continuous and Lipschitz smooth, while  $\mathbb{1}_{\mathcal{X}}$  is continuous and convex. Additionally, the set of solutions is non-empty. As a result, one can solve this problem using the proximal gradient method, which, in this case, is equivalent to the projected gradient method [97, 101]. This view of the problem as proximal minimization allows us to provide a clear definition of a first-order stationary point.

Define the **projected gradient operator** of a function  $\varphi : \mathcal{A} \rightarrow \mathbb{R}$  for some step size  $\eta_{\mathbf{a}} > 0$  as follows:  $G_{\eta_{\mathbf{a}}}^\varphi(\mathbf{a}) = \mathbf{a} - \Pi_{\mathcal{X}} \left[ \mathbf{a} - \eta_{\mathbf{a}} \nabla \varphi(\mathbf{a}) \right]$ . The projected gradient operator is a special case of the gradient mapping operator, and a generalization of the gradient that is projected back onto the feasible set  $\mathcal{X}$  [101]. The zeros of the projected gradient operator capture stationary points both at the boundary of the set  $\mathcal{X}$  and in its interior. Indeed,  $\mathbf{a} \in \mathcal{A}$  is a **stationary point** of  $\varphi$  if  $G_{\eta_{\mathbf{a}}}^\varphi(\mathbf{a}) = \mathbf{0}$ . Note that, for an action profile  $\mathbf{a}^* \in \mathcal{A}$  to be a VE, it is necessary that it is stationary with respect to the VE exploitability (Proposition 3, [80]). Our goal will thus be to achieve convergence to a strategy profile  $\mathbf{a} \in \mathcal{X}$  s.t.  $G_{\eta_{\mathbf{a}}}^{\varphi_\alpha}(\mathbf{a}) = \mathbf{0}$ .

ADA (Algorithm 2) is a nested GDA algorithm, similar to those of Nouiehed et al. [25] and Goktas and Greenwald [85], with the objective function augmented by a smart regularizer. The algorithm is reminiscent of EDA, interleaving gradient ascent and descent steps. The key difference is that whereas EDA runs only a single step of extragradient ascent (to find a better response), ADA runs multiple steps of gradient ascent to approximate a best response. Indeed, as Theorem 4.2 shows, ADA's accuracy depends on the accuracy of the best-response found.

To derive convergence rates for ADA, we rely on two technical lemmas. The first tells us that the inner loop can approximate the gradient of the exploitability to any desired precision. More specifically, we bound the error  $\|\nabla_{\mathbf{a}} \varphi_\alpha(\mathbf{a}^{(t)}) - \nabla_{\mathbf{a}} \psi_\alpha(\mathbf{a}^{(t)}, \mathbf{b}^{(t)})\| \leq \varepsilon$  by providing a lower bound on the number of inner loop iterations  $T_{\mathbf{b}}$  necessary to achieve a desired precision  $\varepsilon$ , for all outer loop iterations  $t \in [T_{\mathbf{a}}]$  (Lemma B.3). The second lemma bounds the algorithm's progress at each iteration of the outer loop by relating  $\varepsilon$  and  $G_{\eta_{\mathbf{a}}}^{\varphi_\alpha}(\mathbf{a}_t)$  (Lemma B.4). Finally, by telescoping the inequalities in the progress lemma, we obtain our main theorem: The best iterate found by

---

**Algorithm 2** Augmented Descent Ascent (ADA)
 

---

**Inputs:**  $n, \mathbf{u}, \mathbf{g}, \alpha, \eta_{\mathbf{a}}, \eta_{\mathbf{b}}, T_{\mathbf{a}}, T_{\mathbf{b}}, \mathbf{a}^{(0)}, \mathbf{b}^{(0)}$ 
**Outputs:**  $(\mathbf{a}^{(t)}, \mathbf{b}^{(t)})_{t=0}^{T_{\mathbf{a}}}$ 

- 1: **for**  $t = 0, \dots, T_{\mathbf{a}} - 1$  **do**
  - 2:      $\mathbf{a}^{(t+1)} = \Pi_{\mathcal{X}} \left[ \mathbf{a}^{(t)} - \eta_{\mathbf{a}} \left( \nabla_{\mathbf{a}} \psi(\mathbf{a}^{(t)}, \mathbf{b}^{(t)}) - \alpha(\mathbf{a}^{(t)} - \mathbf{b}^{(t)}) \right) \right]$
  - 3:      $\mathbf{b} = \mathbf{0}$
  - 4:     **for**  $s = 0, \dots, T_{\mathbf{b}} - 1$  **do**
  - 5:          $\mathbf{b} = \Pi_{\mathcal{X}} \left[ \mathbf{b} + \eta_{\mathbf{b}} \left( \nabla_{\mathbf{b}} \psi(\mathbf{a}^{(t+1)}, \mathbf{b}) - \alpha(\mathbf{a}^{(t+1)} - \mathbf{b}) \right) \right]$
  - 6:      $\mathbf{b}^{(t+1)} = \mathbf{b}$
  - 7: **return**  $(\mathbf{a}^{(t)}, \mathbf{b}^{(t)})_{t=0}^{T_{\mathbf{a}}}$
- 

ADA, as measured by the norm of the projected gradient operator, converges to an approximate stationary point of the exploitability in all Lipschitz-smooth pseudo-games with jointly convex constraints. We note that if the gradient of the regularized exploitability can be computed exactly, then convergence to an exact stationary point can be obtained.

**Theorem 4.2** (Convergence to Stationary Point of Exploitability). *Suppose that ADA is run on a pseudo-game  $\mathcal{G}$  which satisfies Assumption 3.3 with learning rates  $\eta_{\mathbf{a}} > \frac{2}{\ell_{\nabla \psi_{\alpha}} + \frac{\ell_{\nabla^2 \psi_{\alpha}}}{\alpha}}$  and  $\eta_{\mathbf{b}} = \frac{1}{\ell_{\psi_{\alpha}}}$ , for any number of outer loop iterations  $T_{\mathbf{a}} \in \mathbb{N}_{++}$  and for  $T_{\mathbf{b}} \geq \frac{2 \log\left(\frac{\varepsilon}{\ell_{\nabla \psi_{\alpha}} \sqrt{\frac{2\alpha}{c}}}\right)}{\log\left(\frac{\alpha}{\ell_{\nabla \psi_{\alpha}}}\right)}$  total inner loop*

*iterations where  $\varepsilon > 0$ . Then the outputs  $(\mathbf{a}^{(t)}, \mathbf{b}^{(t)})_{t=0}^{T_{\mathbf{a}}}$  satisfy  $\min_{t=0, \dots, T_{\mathbf{a}}-1} \left\| G_{\eta_{\mathbf{a}}}^{\varphi_{\alpha}}(\mathbf{a}^{(t)}) \right\|_2^2 \leq \frac{1}{\frac{1}{\eta_{\mathbf{a}}} - \frac{\ell_{\nabla \psi_{\alpha}}}{2} + \frac{\ell_{\nabla^2 \psi_{\alpha}}}{\alpha}} \left( \frac{\varphi_{\alpha}(\mathbf{a}^{(0)})}{T_{\mathbf{a}}} + \varepsilon \left( \left( \ell_{\nabla \psi_{\alpha}} + \frac{\ell_{\nabla^2 \psi_{\alpha}}}{\alpha} + \varepsilon \right) \left( \frac{\ell_{\nabla \psi_{\alpha}} + \frac{\ell_{\nabla^2 \psi_{\alpha}}}{\alpha}}{2} - \frac{1}{\eta_{\mathbf{a}}} \right) + \ell_{\psi_{\alpha}} \right) \right)$ .*

Note that the stationary points to which ADA converges are global minima of  $\varphi_{\alpha}$  iff  $\varphi_{\alpha}$  is invex, in which case ADA converges to a VE, and hence a GNE [102]. We can also obtain faster and last iterate convergence to VE in a more restricted class of games. A pseudo-game is said to be a  $\mu$ -**PL-pseudo-game** if the regularized exploitability  $\varphi_{\alpha}$  satisfies the  $\mu$ -**projection-Polyak-Lojasiewicz (PL)** condition, i.e., the projected gradient operator associated with  $\varphi_{\alpha}$  satisfies  $\frac{1}{2} \left\| G_{\eta_{\mathbf{a}}}^{\varphi_{\alpha}}(\mathbf{a}) \right\|_2^2 \geq \mu \left( \varphi_{\alpha}(\mathbf{a}) - \min_{\mathbf{a} \in \mathcal{X}} \varphi_{\alpha}(\mathbf{a}) \right)$  for all  $\mathbf{a} \in \mathcal{X}$ .<sup>5</sup> A similar PL-condition for games was recently used by Raghunathan, Cherian, and Jha [104], which they argued is natural.

**Theorem 4.3** (PL Exploitability Convergence). *Suppose ADA is run on a PL-pseudo-game  $\mathcal{G}$  which satisfies Assumption 3.3 with learning rates  $\eta_{\mathbf{a}} \in \left[ \ell_{\nabla \psi_{\alpha}} + \frac{\ell_{\nabla^2 \psi_{\alpha}}}{\alpha}, \ell_{\nabla \psi_{\alpha}} + \frac{\ell_{\nabla^2 \psi_{\alpha}}}{\alpha} + \frac{1}{2\mu} \right]$  and  $\eta_{\mathbf{b}} = 1/\ell_{\nabla \psi_{\alpha}}$ , for any number of outer loop iterations  $T_{\mathbf{a}} \in \mathbb{N}_{++}$  and for  $T_{\mathbf{b}} \geq \frac{\log\left(\frac{\varepsilon}{\ell_{\nabla \psi_{\alpha}} \sqrt{\frac{2\alpha}{c}}}\right)}{\log\left(\frac{\alpha}{\ell_{\nabla \psi_{\alpha}}}\right)}$  total inner loop iterations. Then the outputs*

*$(\mathbf{a}^{(t)}, \mathbf{b}^{(t)})_{t=0}^{T_{\mathbf{a}}}$  satisfy  $\varphi_{\alpha}(\mathbf{a}^{(T_{\mathbf{a}})}) \leq \left[ 1 + 2\mu \left( \frac{\ell_{\nabla \psi_{\alpha}} + \frac{\ell_{\nabla^2 \psi_{\alpha}}}{\alpha}}{2} - \frac{1}{\eta_{\mathbf{a}}} \right) \right]^{T_{\mathbf{a}}} \varphi_{\alpha}(\mathbf{a}^{(0)}) + \left( \left( \ell_{\nabla \psi_{\alpha}} + \frac{\ell_{\nabla^2 \psi_{\alpha}}}{\alpha} + \varepsilon \right) \left( \frac{\ell_{\nabla \psi_{\alpha}} + \frac{\ell_{\nabla^2 \psi_{\alpha}}}{\alpha}}{2} - \frac{1}{\eta_{\mathbf{a}}} \right) + \ell_{\psi_{\alpha}} \right) \varepsilon$ .*

We note that this result also implies convergence to a VE in strongly-convex exploitability games in linear time as well, since strong convexity implies the PL-condition.

---

<sup>5</sup>We note that this is a special case of the proximal-Polyak-Lojasiewicz condition (See Section 4, [103]).

## 5 Experiments

In this section, we report on experiments that demonstrate the effectiveness of our algorithms as compared to others that were also designed to compute GNE. We present numerical results on benchmark pseudo-games that were studied empirically in previous work [104]: 1) monotone pseudo-games with affine constraints and 2) bilinear pseudo-games with jointly convex constraints<sup>6</sup>. We compare our algorithms to the **accelerated mirror-prox quadratic penalty method** (AMPQP), the only GNE-finding algorithm with theoretical convergence guarantees and rates [78].<sup>7</sup> For the AMPQP algorithm, we use the hyperparameter settings derived in theory when available, and otherwise conduct a grid search for the best ones. We compare the convergence rates of our algorithms to that of AMPQP, which converges at the same rate as EDA, but slower than ADA, in settings in which it is guaranteed to converge, i.e., in monotone pseudo-games.

In the monotone pseudo-games, for EDA we use a constant learning rate of  $\eta = 0.02$ , while for ADA we use the constant learning rates of  $\eta_a = 0.02$  and  $\eta_b = 0.05$ . These rates approximate the Lipschitz-smoothness parameter of the pseudo-games. In the bilinear pseudo-games, we use the theoretically-grounded (Theorem 3.4) learning rate of  $\eta = 1/\|Q\|$  for EDA, and  $\eta_a = \|Q\| + \frac{\|Q\|^2}{\alpha}$  and  $\eta_b = 1/\|Q\|$  for ADA. In both settings, we use a regularization of  $\alpha = 0.1$  for ADA, which we found by grid search. Likewise, in our implementation of AMPQP, grid search led us to initialize  $\beta_0 = 0.01, \gamma = 1.05, \alpha = 0.2$  in both settings.<sup>8</sup> Additionally, because the iterates generated by AMPQP are not necessarily feasible, we projected them onto the feasible set of actions, so as to avoid infinite exploitability. This heuristic improved the convergence rate of AMPQP significantly. The first iterate for all methods was common, and initialized at random.

**Monotone Games with Jointly Affine Constraints** We begin by experimenting with monotone games with jointly affine constraints, the largest class of pseudo-games for which convergence rates exist for AMPQP. In particular, we consider norm-minimization pseudo-games with payoff functions  $u_i(\mathbf{a}) = -\left\|\sum_{i \in [n]} \mathbf{a}_i - \mathbf{s}_i\right\|$ , for all players  $i \in [n]$ , and for some randomly initialized shifting factors  $\mathbf{s}_i$ , as well as jointly affine constraints  $g(\mathbf{a}) = 1 - \sum_{j \in [m]} a_{1j} - \sum_{i \in [m]} a_{2j}$ , with action spaces  $\mathcal{A}_i = [-10, 10]^m$ , for all players  $i \in [n]$ . Although norm-minimization games are trivial, in the sense that they can be solved in closed form, this is not the case for pseudo-games; on the contrary, they form a bedrock example for monotone pseudo-games ([57], Example 1).


In Figure 1a, we observe that all three algorithms converge to a GNE. Interestingly, EDA and ADA find distinct GNEs from AMPQP, which is not entirely surprising, as AMPQP is not an exploitability minimization algorithm. Although all the algorithms eventually find a GNE, exploitability does not decrease monotonically (Figure 1b); on the contrary, it increases before eventually decreasing to zero. Convergence to a GNE is expected for AMPQP, as per the theory. EDA, however, is not guaranteed to converge to a GNE in pseudo-games beyond convex exploitability; yet, we still observe convergence, albeit at a slower rate than AMPQP or ADA. Likewise, ADA converges to a GNE, although it is again not guaranteed, much faster than AMPQP.

**Bilinear General-Sum Games with Jointly Convex Constraints** Second, we consider the class of two-player general-sum games with jointly convex constraints with payoff functions  $u_1(\mathbf{a}) = \mathbf{a}_1^T \mathbf{Q}_1 \mathbf{a}_2, u_2(\mathbf{a}) = \mathbf{a}_1^T \mathbf{Q}_2 \mathbf{a}_2, g(\mathbf{a}) = 1 - \|\mathbf{a}\|_2^2, \mathcal{A}_1 = \mathcal{A}_2 = [-10, 10]^m$ . Such games are not monotone, and hence AMPQP is not guaranteed to converge in theory. In Figure 1c, we see that convergence is not guaranteed empirically either; shown is a sample run in which ADA and EDA converge, while AMPQP exhibits erratic behavior. Non-convergence for AMPQP was

<sup>6</sup>We describe additional experiments in the supplemental work, with two-player zero-sum bilinear pseudo-games with jointly affine constraints and two-player zero-sum bilinear pseudo-games with jointly convex constraints. The results are not qualitatively different than those presented here. All our code can be found on <https://github.com/denizalp/exploit-min>

<sup>7</sup>We note that we are not reporting on our results with the Accelerated Mirror-Prox Augmented Lagrangian Method (AMPAL), another method studied in the literature with the convergence rates as AMPQP, because we found this algorithm to be unstable on our benchmark pseudo-games.

<sup>8</sup>As suggested by Jordan, Lin, and Zampetakis [78], we replaced the convergence tolerance parameter  $\delta$ , with the number of iterations for which the accelerated mirror-prox subroutine [105] was run. Then, at each iteration of AMPQP, this parameter was increased by a factor of  $\gamma$  of AMPQP.

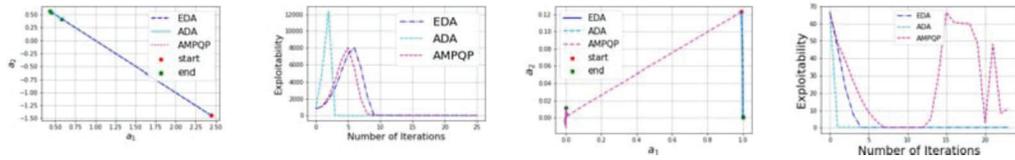

(a) Phase portrait for a 2 player monotone game with  $m = 1$  (b) Exploitability for a 5 player monotone game with  $m = 10$  (c) Phase portrait for bilinear general-sum pseudo-game with  $m = 1$  (d) Exploitability for a bilinear general-sum pseudo-game;  $m = 10$

Figure 1: Convergence in monotone and bilinear general-sum pseudo-games.

observed in 93 of the 100 experiments run. In fact, even though AMPQP gets very close a GNE (Figure 1d), i.e., zero exploitability, it does not stabilize there. We likewise found that ADA and EDA do not converge to a GNE from all random initializations. In such cases, we restarted the algorithms with a new random initialization; this process led to on average 11 restarts for EDA and 10 restarts for ADA, meaning both algorithms converged to a GNE within this window.

## 6 Conclusion

In this paper, we provide an affirmative answer to an open question first posed by Flam and Ruszczyński [80], who suggested that projected gradient methods could be developed to minimize exploitability in pseudo-games. Although some existing methods [57] make use of the exploitability concept to analyze algorithms that take alternative optimization approaches, we know of none that are exploitability-minimization algorithms per se, as exploitability itself is not explicitly minimized. Our main contribution is the observation that the exploitability minimization problem can be recast as a simple and seemingly trivial min-max optimization problem (Observation 3.2). Our analysis effectively extends the class of games which can be solved as potential games, since the exploitability can be seen as a potential for any game.

We provide a definition of stationarity for exploitability via the gradient mapping operator from proximal theory, and we use this definition to characterize the limit points of our algorithms. Our characterization relies on novel proof techniques inspired by recent analyses of algorithms for min-max optimization problems [25], as well as a parameterized version of Moreau’s envelope theorem, which may be of independent interest. This approach, which takes advantage of the structural properties of exploitability, allows us to rigorously analyze an algorithm that converges to stationary points of the VE exploitability in all Lipschitz-smooth pseudo-games with jointly convex constraints, and obtain algorithms which are orders of magnitude faster than known min-max optimization algorithms for similar types of problems. To summarize, our results 1. extend known polynomial-time convergence guarantees to VEs, and thus GNEs, to a class of pseudo-games beyond monotone, and 2. provide a general approach to approximate, with convergence guarantees, solutions to Lipschitz-smooth pseudo-games with jointly convex constraints.

The design of efficient algorithms for constrained non-convex-concave min-max optimization problems is an open problem. The literature thus far has focused on problems in which only the variable to be maximized is constrained [25, 27, 29]. Our techniques may provide a path to solving non-convex-concave min-max optimization problems in entirely constrained domains, since our algorithms solve a non-convex-concave optimization problem where both variables are constrained.

## Acknowledgments and Disclosure of Funding

The ideas in this paper stemmed from conversations and seminars held during the Learning in Games workshop at the Simons Institute for the Theory of Computing. This work was also supported by NSF Grant CMMI-1761546.

## References

- [1] John F. Nash. "Equilibrium points in  $n$ -person games". In: *Proceedings of the National Academy of Sciences* 36.1 (1950), pp. 48–49. DOI: [10.1073/pnas.36.1.48](https://doi.org/10.1073/pnas.36.1.48); eprint: <https://www.pnas.org/doi/pdf/10.1073/pnas.36.1.48>; URL: <https://www.pnas.org/doi/abs/10.1073/pnas.36.1.48>
- [2] Martin J Osborne and Ariel Rubinstein. *A course in game theory*. MIT press, 1994.
- [3] Noam Nisan and Tim Roughgarden. *Algorithmic Game Theory*. Cambridge University Press, 2007. DOI: [10.1017/CBO9780511800481](https://doi.org/10.1017/CBO9780511800481)
- [4] Christos H Papadimitriou. "On the complexity of the parity argument and other inefficient proofs of existence". In: *Journal of Computer and system Sciences* 48.3 (1994), pp. 498–532.
- [5] Xi Chen and Xiaotie Deng. "3-Nash is PPAD-complete". In: *Electronic Colloquium on Computational Complexity*. Vol. 134. Citeseer, 2005, pp. 2–29.
- [6] Xi Chen and Xiaotie Deng. "Settling the complexity of two-player Nash equilibrium". In: *2006 47th Annual IEEE Symposium on Foundations of Computer Science (FOCS'06)*. IEEE, 2006, pp. 261–272.
- [7] Constantinos Daskalakis, Paul W Goldberg, and Christos H Papadimitriou. "The complexity of computing a Nash equilibrium". In: *SIAM Journal on Computing* 39.1 (2009), pp. 195–259.
- [8] Paul Tseng. "On linear convergence of iterative methods for the variational inequality problem". In: *Journal of Computational and Applied Mathematics* 60.1 (1995). Proceedings of the International Meeting on Linear/Nonlinear Iterative Methods and Verification of Solution, pp. 237–252. ISSN: 0377-0427. DOI: [https://doi.org/10.1016/0377-0427\(94\)00094-H](https://doi.org/10.1016/0377-0427(94)00094-H); URL: <https://www.sciencedirect.com/science/article/pii/037704279400094H>
- [9] Yurii Nesterov and Laura Scrimali. "Solving strongly monotone variational and quasi-variational inequalities". In: *Discrete & Continuous Dynamical Systems* 31.4 (2011), pp. 1383–1396.
- [10] Gauthier Gidel et al. *A Variational Inequality Perspective on Generative Adversarial Networks*. 2020. arXiv: [1802.10551](https://arxiv.org/abs/1802.10551) [cs.LG].
- [11] Aryan Mokhtari, Asuman Ozdaglar, and Sarath Pattathil. *Convergence Rate of  $O(1/k)$  for Optimistic Gradient and Extra-gradient Methods in Smooth Convex-Concave Saddle Point Problems*. 2020. arXiv: [1906.01115](https://arxiv.org/abs/1906.01115) [math.OA].
- [12] Adam Ibrahim et al. "Lower bounds and conditioning of differentiable games". In: *arXiv preprint arXiv:1906.07300* (2019).
- [13] Mingyi Hong, Junyu Zhang, Shuzhong Zhang, et al. *On Lower Iteration Complexity Bounds for the Saddle Point Problems*. 2020. arXiv: [1912.07481](https://arxiv.org/abs/1912.07481) [math.OA].
- [14] Tianyi Lin, Chi Jin, and Michael I Jordan. "Near-optimal algorithms for minimax optimization". In: *Conference on Learning Theory*. PMLR, 2020, pp. 2738–2779.
- [15] Mohammad Alkousa et al. *Accelerated methods for composite non-bilinear saddle point problem*. 2020. arXiv: [1906.03620](https://arxiv.org/abs/1906.03620) [math.OA].
- [16] Anatoli Juditsky, Arkadi Nemirovski, et al. "First order methods for nonsmooth convex large-scale optimization, ii: utilizing problems structure". In: *Optimization for Machine Learning* 30.9 (2011), pp. 149–183.
- [17] Erfan Yazdandoost Hamedani and Necdet Serhat Aybat. "A primal-dual algorithm for general convex-concave saddle point problems". In: *arXiv preprint arXiv:1803.01401* 2 (2018).
- [18] Zhao Renbo. *Optimal algorithms for stochastic three-composite convex-concave saddle point problems*. 2019. arXiv: [1903.01687](https://arxiv.org/abs/1903.01687) [math.OA].
- [19] Kiran Koshy Thekumparampil et al. *Efficient Algorithms for Smooth Minimax Optimization*. 2019. arXiv: [1907.01543](https://arxiv.org/abs/1907.01543) [math.OA].
- [20] Yuyuan Ouyang and Yangyang Xu. *Lower complexity bounds offi rst-order methods for convex-concave bilinear saddle-point problems*. 2018. arXiv: [1808.02901](https://arxiv.org/abs/1808.02901) [math.OA].
- [21] Arkadi Nemirovski. "Prox-method with rate of convergence  $O(1/t)$  for variational inequalities with Lipschitz continuous monotone operators and smooth convex-concave saddle point problems". In: *SIAM Journal on Optimization* 15.1 (2004), pp. 229–251.
- [22] Yurii Nesterov. "Dual extrapolation and its applications to solving variational inequalities and related problems". In: *Mathematical Programming* 109.2 (2007), pp. 319–344.

- [23] Paul Tseng. “On accelerated proximal gradient methods for convex-concave optimization”. In: *submitted to SIAM Journal on Optimization* 1 (2008).
- [24] Maziar Sanjabi et al. “On the Convergence and Robustness of Training GANs with Regularized Optimal Transport”. In: *Proceedings of the 32nd International Conference on Neural Information Processing Systems*. NIPS’18. Montreal, Canada: Curran Associates Inc., 2018, pp. 7091–7101.
- [25] Maher Nouiehed et al. “Solving a class of non-convex min-max games using iterative first order methods”. In: *arXiv preprint arXiv:1902.08297* (2019).
- [26] Songtao Lu, Ioannis Tsaknakis, and Mingyi Hong. “Block alternating optimization for non-convex min-max problems: algorithms and applications in signal processing and communications”. In: *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2019, pp. 4754–4758.
- [27] Chi Jin, Praneeth Netrapalli, and Michael I. Jordan. *What is Local Optimality in Nonconvex-Nonconcave Minimax Optimization?* 2020. arXiv: [1902.00618 \[cs.LG\]](https://arxiv.org/abs/1902.00618).
- [28] Dmitrii M Ostrovskii, Andrew Lowy, and Meisam Razaviyayn. “Efficient search of first-order nash equilibria in nonconvex-concave smooth min-max problems”. In: *arXiv preprint arXiv:2002.07919* (2020).
- [29] Tianyi Lin, Chi Jin, and Michael Jordan. “On gradient descent ascent for nonconvex-concave minimax problems”. In: *International Conference on Machine Learning*. PMLR, 2020, pp. 6083–6093.
- [30] Renbo Zhao. *A Primal Dual Smoothing Framework for Max-Structured Nonconvex Optimization*. 2020. arXiv: [2003.04375 \[math.OA\]](https://arxiv.org/abs/2003.04375).
- [31] Hassan Rafique et al. *Non-Convex Min-Max Optimization: Provable Algorithms and Applications in Machine Learning*. 2019. arXiv: [1810.02060 \[math.OA\]](https://arxiv.org/abs/1810.02060).
- [32] Dov Monderer and Lloyd S Shapley. “Potential games”. In: *Games and economic behavior* 14.1 (1996), pp. 124–143.
- [33] William H Sandholm. “Potential games with continuous player sets”. In: *Journal of Economic theory* 97.1 (2001), pp. 81–108.
- [34] Stephane Durand and Bruno Gaujal. “Complexity and optimality of the best response algorithm in random potential games”. In: *International Symposium on Algorithmic Game Theory*. Springer, 2016, pp. 40–51.
- [35] Yurii Nesterov and Laura Scramali. “Solving strongly monotone variational and quasi-variational inequalities”. In: (2006).
- [36] Yang Cai, Argyris Oikonomou, and Weiqiang Zheng. “Tight Last-Iterate Convergence of the Extragradient Method for Constrained Monotone Variational Inequalities”. In: *arXiv preprint arXiv:2204.09228* (2022).
- [37] Yu Malitsky. “Projected reflected gradient methods for monotone variational inequalities”. In: *SIAM Journal on Optimization* 25.1 (2015), pp. 502–520.
- [38] Eduard Gorbunov, Nicolas Loizou, and Gauthier Gidel. “Extragradient method:  $O(1/K)$  last-iterate convergence for monotone variational inequalities and connections with cocoercivity”. In: *International Conference on Artificial Intelligence and Statistics*. PMLR, 2022, pp. 366–402.
- [39] Tatiana Tatarenko and Maryam Kamgarpour. “Learning Nash equilibria in monotone games”. In: *2019 IEEE 58th Conference on Decision and Control (CDC)*. IEEE, 2019, pp. 3104–3109.
- [40] Bingsheng He et al. “A new inexact alternating directions method for monotone variational inequalities”. In: *Mathematical Programming* 92.1 (2002), pp. 103–118.
- [41] Yu V Malitsky and VV Semenov. “An extragradient algorithm for monotone variational inequalities”. In: *Cybernetics and Systems Analysis* 50.2 (2014), pp. 271–277.
- [42] Ian Goodfellow et al. “Generative Adversarial Nets”. In: *Advances in Neural Information Processing Systems*. Ed. by Z. Ghahramani et al. Vol. 27. Curran Associates, Inc., 2014. URL: <https://proceedings.neurips.cc/paper/2014/file/5ca3e9b122f61f8f06494c97b1afccf3-Paper.pdf>
- [43] Antonia Creswell et al. “Generative Adversarial Networks: An Overview”. In: *IEEE Signal Processing Magazine* 35.1 (2018), pp. 53–65. doi: [10.1109/MSP.2017.2765202](https://doi.org/10.1109/MSP.2017.2765202).
- [44] Kenneth Arrow and Gerard Debreu. “Existence of an equilibrium for a competitive economy”. In: *Econometrica: Journal of the Econometric Society* (1954), pp. 265–290.

- [45] Michael Brückner, Christian Kanzow, and Tobias Scheffer. “Static prediction games for adversarial learning problems”. In: *J. Mach. Learn. Res.* 13 (2012), pp. 2617–2654. URL: <http://dl.acm.org/citation.cfm?id=2503326>
- [46] Michael Brückner and Tobias Scheffer. “Nash equilibria of static prediction games”. In: *Advances in neural information processing systems* 22 (2009).
- [47] Benjamin F. Hobbs and J. S. Pang. “Nash-Cournot Equilibria in Electric Power Markets with Piecewise Linear Demand Functions and Joint Constraints”. In: *Operations Research* 55.1 (2007), pp. 113–127. DOI: [10.1287/opre.1060.0342](https://doi.org/10.1287/opre.1060.0342) eprint: <https://doi.org/10.1287/opre.1060.0342> URL: <https://doi.org/10.1287/opre.1060.0342>
- [48] Wei Jing-Yuan and Yves Smeers. “Spatial Oligopolistic Electricity Models with Cournot Generators and Regulated Transmission Prices”. In: *Operations Research* 47.1 (1999), pp. 102–112. DOI: [10.1287/opre.47.1.102](https://doi.org/10.1287/opre.47.1.102) eprint: <https://pubsonline.informs.org/doi/pdf/10.1287/opre.47.1.102> URL: <https://pubsonline.informs.org/doi/abs/10.1287/opre.47.1.102>
- [49] Michele Breton, Georges Zaccour, and Mehdi Zahaf. “A game-theoretic formulation of joint implementation of environmental projects”. In: *European Journal of Operational Research* 168.1 (2006), pp. 221–239.
- [50] Jacek B. Krawczyk. “Coupled constraint Nash equilibria in environmental games”. In: *Resource and Energy Economics* 27.2 (2005), pp. 157–181. ISSN: 0928-7655. DOI: <https://doi.org/10.1016/j.reseneeco.2004.08.001> URL: <https://www.sciencedirect.com/science/article/pii/S0928765504000661>
- [51] Danilo Ardagna, Michele Ciavotta, and Mauro Passacantando. “Generalized Nash Equilibria for the Service Provisioning Problem in Multi-Cloud Systems”. In: *IEEE Transactions on Services Computing* 10.3 (2017), pp. 381–395. DOI: [10.1109/TSC.2015.2477836](https://doi.org/10.1109/TSC.2015.2477836)
- [52] Danilo Ardagna, Barbara Panicucci, and Mauro Passacantando. “A Game Theoretic Formulation of the Service Provisioning Problem in Cloud Systems”. In: *Proceedings of the 20th International Conference on World Wide Web. WWW '11*. Hyderabad, India: Association for Computing Machinery, 2011, pp. 177–186. ISBN: 9781450306324. DOI: [10.1145/1963405.1963433](https://doi.org/10.1145/1963405.1963433) URL: <https://doi.org/10.1145/1963405.1963433>
- [53] Xuegang (Jeff) Ban et al. “A general equilibrium model for transportation systems with e-hailing services and flow congestion”. In: *Transportation Research Part B: Methodological* 129 (2019), pp. 273–304. ISSN: 0191-2615. DOI: <https://doi.org/10.1016/j.trb.2019.08.012> URL: <https://www.sciencedirect.com/science/article/pii/S0191261518309044>
- [54] Oliver Stein and Nathan Sudermann-Merx. “The noncooperative transportation problem and linear generalized Nash games”. In: *European Journal of Operational Research* 266.2 (2018), pp. 543–553. DOI: [10.1016/j.ejor.2017.10.00](https://doi.org/10.1016/j.ejor.2017.10.00) URL: <https://ideas.repec.org/a/eee/ejores/v266y2018i2p543-553.html>
- [55] Zhu Han et al. *Game theory in wireless and communication networks: Theory, models, and applications*. English. Vol. 9780521196963. Publisher Copyright: © Cambridge University Press 2012. United Kingdom: Cambridge University Press, Jan. 2011. ISBN: 9780521196963. DOI: [10.1017/CBO9780511895043](https://doi.org/10.1017/CBO9780511895043)
- [56] Jong-Shi Pang et al. “Distributed power allocation with rate constraints in Gaussian parallel interference channels”. In: *IEEE Transactions on Information Theory* 54.8 (2008), pp. 3471–3489.
- [57] Francisco Facchinei and Christian Kanzow. “Generalized Nash equilibrium problems”. In: *Annals of Operations Research* 175.1 (2010), pp. 177–211.
- [58] Andreas Fischer, Markus Herrich, and Klaus Schönefeld. “GENERALIZED NASH EQUILIBRIUM PROBLEMS - RECENT ADVANCES AND CHALLENGES”. In: *Pesquisa Operacional* 34 (2014), pp. 521–558.
- [59] Francisco Facchinei, Andreas Fischer, and Veronica Piccialli. “Generalized Nash equilibrium problems and Newton methods”. In: *Mathematical Programming* 117.1 (2009), pp. 163–194.
- [60] Francisco Facchinei and Simone Sagratella. “On the computation of all solutions of jointly convex generalized Nash equilibrium problems”. In: *Optimization Letters* 5.3 (2011), pp. 531–547.
- [61] Dario Paccagnan et al. “Distributed computation of generalized Nash equilibria in quadratic aggregative games with affine coupling constraints”. In: *2016 IEEE 55th Conference on Decision and Control (CDC)*. IEEE, 2016, pp. 6123–6128.

- [62] Peng Yi and Laca Pavel. “A distributed primal-dual algorithm for computation of generalized Nash equilibria via operator splitting methods”. In: *2017 IEEE 56th Annual Conference on Decision and Control (CDC)*. IEEE. 2017, pp. 3841–3846.
- [63] Eleftherios Couzoudis and Philipp Renner. “Computing generalized Nash equilibria by polynomial programming”. In: *Mathematical Methods of Operations Research* 77.3 (2013), pp. 459–472.
- [64] Axel Dreves. “Computing all solutions of linear generalized Nash equilibrium problems”. In: *Mathematical Methods of Operations Research* 85.2 (2017), pp. 207–221.
- [65] Anna Von Heusinger and Christian Kanzow. “Optimization reformulations of the generalized Nash equilibrium problem using Nikaido-Isoda-type functions”. In: *Computational Optimization and Applications* 43.3 (2009), pp. 353–377.
- [66] Tatiana Tatarenko and Maryam Kamgarpour. “Learning generalized Nash equilibria in a class of convex games”. In: *IEEE Transactions on Automatic Control* 64.4 (2018), pp. 1426–1439.
- [67] Axel Dreves and Nathan Sudermann-Merx. “Solving linear generalized Nash equilibrium problems numerically”. In: *Optimization Methods and Software* 31.5 (2016), pp. 1036–1063.
- [68] Anna von Heusinger, Christian Kanzow, and Masao Fukushima. “Newton’s method for computing a normalized equilibrium in the generalized Nash game through fixed point formulation”. In: *Mathematical Programming* 132.1 (2012), pp. 99–123.
- [69] Alexey F Izmailov and Mikhail V Solodov. “On error bounds and Newton-type methods for generalized Nash equilibrium problems”. In: *Computational Optimization and Applications* 59.1 (2014), pp. 201–218.
- [70] Andreas Fischer et al. “A globally convergent LP-Newton method”. In: *SIAM Journal on Optimization* 26.4 (2016), pp. 2012–2033.
- [71] Jong-Shi Pang and Masao Fukushima. “Quasi-variational inequalities, generalized Nash equilibria, and multi-leader-follower games”. In: *Computational Management Science* 2.1 (2005), pp. 21–56.
- [72] Francisco Facchinei and Lorenzo Lampariello. “Partial penalization for the solution of generalized Nash equilibrium problems”. In: *Journal of Global Optimization* 50.1 (2011), pp. 39–57.
- [73] Masao Fukushima. “Restricted generalized Nash equilibria and controlled penalty algorithm”. In: *Computational Management Science* 8.3 (2011), pp. 201–218.
- [74] Christian Kanzow. “On the multiplier-penalty-approach for quasi-variational inequalities”. In: *Mathematical Programming* 160.1 (2016), pp. 33–63.
- [75] Christian Kanzow and Daniel Steck. “Augmented Lagrangian methods for the solution of generalized Nash equilibrium problems”. In: *SIAM Journal on Optimization* 26.4 (2016), pp. 2034–2058.
- [76] Christian Kanzow and Daniel Steck. “Augmented Lagrangian and exact penalty methods for quasi-variational inequalities”. In: *Computational Optimization and Applications* 69.3 (2018), pp. 801–824.
- [77] Qin Ba and Jong-Shi Pang. “Exact penalization of generalized Nash equilibrium problems”. In: *Operations Research* (2020).
- [78] Michael I. Jordan, Tianyi Lin, and Manolis Zampetakis. *First-Order Algorithms for Nonlinear Generalized Nash Equilibrium Problems*. 2022. DOI: [10.48550/ARXIV.2204.03132](https://doi.org/10.48550/ARXIV.2204.03132) URL: <https://arxiv.org/abs/2204.03132>
- [79] Hukukane Nikaidô and Kazuo Isoda. “Note on non-cooperative convex games”. In: *Pacific Journal of Mathematics* 5.S1 (1955), pp. 807–815.
- [80] Sjur Flam and Andrzej Ruszczyński. *Noncooperative Convex Games: Computing Equilibrium By Partial Regularization*. Working Papers. International Institute for Applied Systems Analysis, 1994. URL: <https://EconPapers.repec.org/RePEc:wop:iasawp:wp94042>.
- [81] Edward Lockhart et al. “Computing Approximate Equilibria in Sequential Adversarial Games by Exploitability Descent”. In: *CoRR* abs/1903.05614 (2019). arXiv: [1903.05614](https://arxiv.org/abs/1903.05614) URL: <http://arxiv.org/abs/1903.05614>.
- [82] Ian M. Gemp et al. “Sample-based Approximation of Nash in Large Many-Player Games via Gradient Descent”. In: *CoRR* abs/2106.01285 (2021). arXiv: [2106.01285](https://arxiv.org/abs/2106.01285) URL: <https://arxiv.org/abs/2106.01285>.

- [83] Galina M Korpelevich. “The extragradient method for finding saddle points and other problems”. In: *Matecon* 12 (1976), pp. 747–756.
- [84] Angelia Nedic and Asuman Ozdaglar. “Subgradient methods for saddle-point problems”. In: *Journal of optimization theory and applications* 142.1 (2009), pp. 205–228.
- [85] Denizalp Goktas and Amy Greenwald. “Convex-Concave Min-Max Stackelberg Games”. In: *Advances in Neural Information Processing Systems* 34 (2021).
- [86] J. B. Rosen. “Existence and Uniqueness of Equilibrium Points for Concave N-Person Games”. In: *Econometrica* 33.3 (1965), pp. 520–534. ISSN: 00129682, 14680262. URL: <http://www.jstor.org/stable/1911749> (visited on 05/16/2022).
- [87] S. Uryas’ev and R.Y. Rubinstein. “On relaxation algorithms in computation of noncooperative equilibria”. In: *IEEE Transactions on Automatic Control* 39.6 (1994), pp. 1263–1267. DOI: [10.1109/9.293193](https://doi.org/10.1109/9.293193)
- [88] Jacek B. Krawczyk and Stanislav Uryasev. “Relaxation algorithms to find Nash equilibria with economic applications”. English. In: *Environmental Modeling & Assessment* 5.1 (2000). This revised version was published online in July 2006 with corrections to the Cover Date., pp. 63–73. DOI: [10.1023/A:1019097208499](https://doi.org/10.1023/A:1019097208499)
- [89] A. Heusinger and C. Kanzow. “Relaxation Methods for Generalized Nash Equilibrium Problems with Inexact Line Search”. In: *Journal of Optimization Theory and Applications* 143.1 (2009), pp. 159–183. URL: [https://EconPapers.repec.org/RePEc:spr:joptap:v:143:y:2009:i:1:d:10.1007\\_s10957-009-9553-0](https://EconPapers.repec.org/RePEc:spr:joptap/v:143:y:2009:i:1:d:10.1007_s10957-009-9553-0)
- [90] Axel Dreves et al. “A Globalized Newton Method for the Computation of Normalized Nash Equilibria”. In: *J. of Global Optimization* 56.2 (June 2013), pp. 327–340. ISSN: 0925-5001. DOI: [10.1007/s10898-011-9824-9](https://doi.org/10.1007/s10898-011-9824-9). URL: <https://doi.org/10.1007/s10898-011-9824-9>
- [91] Francisco Facchinei, Andreas Fischer, and Veronica Piccialli. “On generalized Nash games and variational inequalities”. In: *Operations Research Letters* 35.2 (2007), pp. 159–164. ISSN: 0167-6377. DOI: <https://doi.org/10.1016/j.orl.2006.03.004>. URL: <https://www.sciencedirect.com/science/article/pii/S0167637706000484>
- [92] Koichi Nabetani, Paul Tseng, and Masao Fukushima. “Parametrized Variational Inequality Approaches to Generalized Nash Equilibrium Problems with Shared Constraints”. In: *Comput. Optim. Appl.* 48.3 (Apr. 2011), pp. 423–452. ISSN: 0926-6003. DOI: [10.1007/s10589-009-9256-3](https://doi.org/10.1007/s10589-009-9256-3). URL: <https://doi.org/10.1007/s10589-009-9256-3>
- [93] Dane A. Schiro, Jong-Shi Pang, and Uday V. Shanbhag. “On the solution of affine generalized Nash equilibrium problems with shared constraints by Lemke’s method”. English. In: *Mathematical Programming* 142.1-2 (2013). This work was based on research partially supported by the National Science Foundation under grant CMMI-0969600 and the Department of Energy under grant DOE DE-SC0003879., pp. 1–46. DOI: [10.1007/s10107-012-0558-3](https://doi.org/10.1007/s10107-012-0558-3).
- [94] Francisco Facchinei and Christian Kanzow. “Penalty Methods for the Solution of Generalized Nash Equilibrium Problems”. In: *SIAM Journal on Optimization* 20.5 (2010), pp. 2228–2253. DOI: [10.1137/090749499](https://doi.org/10.1137/090749499). eprint: <https://doi.org/10.1137/090749499>. URL: <https://doi.org/10.1137/090749499>
- [95] Luís Felipe Bueno, Gabriel Haeser, and Frank Navarro Rojas. “Optimality Conditions and Constraint Qualifications for Generalized Nash Equilibrium Problems and Their Practical Implications”. In: *SIAM Journal on Optimization* 29.1 (2019), pp. 31–54. DOI: [10.1137/17M1162524](https://doi.org/10.1137/17M1162524). eprint: <https://doi.org/10.1137/17M1162524>. URL: <https://doi.org/10.1137/17M1162524>
- [96] J v Neumann. “Zur theorie der gesellschaftsspiele”. In: *Mathematische annalen* 100.1 (1928), pp. 295–320.
- [97] Stephen Boyd, Stephen P Boyd, and Lieven Vandenberghe. *Convex optimization*. Cambridge university press, 2004.
- [98] Noah Golowich et al. “Last Iterate is Slower than Averaged Iterate in Smooth Convex-Concave Saddle Point Problems”. In: *CoRR* abs/2002.00057 (2020). arXiv: [2002.00057](https://arxiv.org/abs/2002.00057). URL: <https://arxiv.org/abs/2002.00057>
- [99] Ioannis Tsaknakis, Mingyi Hong, and Shuzhong Zhang. “Minimax Problems with Coupled Linear Constraints: Computational Complexity, Duality and Solution Methods”. In: *arXiv preprint arXiv:2110.11210* (2021).
- [100] Jean-Jacques Moreau. “Proximité et dualité dans un espace hilbertien”. In: *Bulletin de la Société mathématique de France* 93 (1965), pp. 273–299.

- [101] Amir Beck. *First-order methods in optimization*. SIAM, 2017.
- [102] Shashi K Mishra and Giorgio Giorgi. *Invexity and optimization*. Vol. 88. Springer Science & Business Media, 2008.
- [103] Hamed Karimi, Julie Nutini, and Mark Schmidt. “Linear convergence of gradient and proximal-gradient methods under the polyak-lojasiewicz condition”. In: *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*. Springer. 2016, pp. 795–811.
- [104] Arvind Raghunathan, Anoop Cherian, and Devesh Jha. “Game theoretic optimization via gradient-based nikaido-isoda function”. In: *International Conference on Machine Learning*. PMLR. 2019, pp. 5291–5300.
- [105] Yunmei Chen, Guanghui Lan, and Yuyuan Ouyang. “Accelerated schemes for a class of variational inequalities”. In: *Mathematical Programming* 165.1 (2017), pp. 113–149.
- [106] Guido Van Rossum and Fred L Drake Jr. *Python tutorial*. Centrum voor Wiskunde en Informatica Amsterdam, The Netherlands, 1995.
- [107] Charles R. Harris et al. “Array programming with NumPy”. In: *Nature* 585 (2020), pp. 357–362. doi: [10.1038/s41586-020-2649-2](https://doi.org/10.1038/s41586-020-2649-2).
- [108] Steven Diamond and Stephen Boyd. “CVXPY: A Python-embedded modeling language for convex optimization”. In: *Journal of Machine Learning Research* 17.83 (2016), pp. 1–5.
- [109] J. D. Hunter. “Matplotlib: A 2D graphics environment”. In: *Computing in Science & Engineering* 9.3 (2007), pp. 90–95. doi: [10.1109/MCSE.2007.55](https://doi.org/10.1109/MCSE.2007.55)
- [110] Gauthier Gidel et al. “A variational inequality perspective on generative adversarial networks”. In: *arXiv preprint arXiv:1802.10551* (2018).
- [111] John M. Danskin. “The Theory of Max-Min, with Applications”. In: *SIAM Journal on Applied Mathematics* 14.4 (1966), pp. 641–664. ISSN: 00361399. URL: <http://www.jstor.org/stable/2946123>.
- [112] S. N. Afriat. “Theory of Maxima and the Method of Lagrange”. In: *SIAM Journal on Applied Mathematics* 20.3 (1971), pp. 343–357. ISSN: 00361399. URL: <http://www.jstor.org/stable/2099955>.
- [113] Paul Milgrom and Ilya Segal. “Envelope theorems for arbitrary choice sets”. In: *Econometrica* 70.2 (2002), pp. 583–601.
- [114] Murray H Protter, B Charles Jr, et al. *A first course in real analysis*. Springer Science & Business Media, 2012.
- [115] Haim Brezis and Haim Brézis. *Functional analysis, Sobolev spaces and partial differential equations*. Vol. 2. 3. Springer, 2011.
- [116] Elad Hazan, Karan Singh, and Cyril Zhang. “Efficient regret minimization in non-convex games”. In: *International Conference on Machine Learning*. PMLR. 2017, pp. 1433–1441.

## Checklist

1. For all authors...
  - (a) Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope? [Yes]
  - (b) Did you describe the limitations of your work? [Yes] Yes, details are discussed in conclusion, and experiments sections.
  - (c) Did you discuss any potential negative societal impacts of your work? [N/A]
  - (d) Have you read the ethics review guidelines and ensured that your paper conforms to them? [Yes]
2. If you are including theoretical results...
  - (a) Did you state the full set of assumptions of all theoretical results? [Yes] Assumptions are summarized in Assumption [3.3](#)
  - (b) Did you include complete proofs of all theoretical results? [Yes] Yes, all proofs can be found in the appendix.
3. If you ran experiments...
  - (a) Did you include the code, data, and instructions needed to reproduce the main experimental results (either in the supplemental material or as a URL)? [Yes] Yes, code repo can be found here: <https://github.com/denizalp/exploit-min>
  - (b) Did you specify all the training details (e.g., data splits, hyperparameters, how they were chosen)? [Yes] Details can be found in section 5 and Appendix A.
  - (c) Did you report error bars (e.g., with respect to the random seed after running experiments multiple times)? [Yes] For experiments run multiple times, i.e., zero-sum convex constraints, exploitability always reached zero, and there was hence no error to report in all randomly initialized examples.
  - (d) Did you include the total amount of compute and the type of resources used (e.g., type of GPUs, internal cluster, or cloud provider)? [Yes] Details can be found in Appendix A.
4. If you are using existing assets (e.g., code, data, models) or curating/releasing new assets...
  - (a) If your work uses existing assets, did you cite the creators? [Yes] Details can be found in Appendix A
  - (b) Did you mention the license of the assets? [Yes] Details can be found in Appendix A
  - (c) Did you include any new assets either in the supplemental material or as a URL? [N/A]
  - (d) Did you discuss whether and how consent was obtained from people whose data you're using/curating? [N/A]
  - (e) Did you discuss whether the data you are using/curating contains personally identifiable information or offensive content? [N/A]
5. If you used crowdsourcing or conducted research with human subjects...
  - (a) Did you include the full text of instructions given to participants and screenshots, if applicable? [N/A]
  - (b) Did you describe any potential participant risks, with links to Institutional Review Board (IRB) approvals, if applicable? [N/A]
  - (c) Did you include the estimated hourly wage paid to participants and the total amount spent on participant compensation? [N/A]