
What matters when building vision-language models?

Hugo Laurençon^{*,1,2} Léo Tronchon^{*,1} Matthieu Cord^{2,3} Victor Sanh¹

¹Hugging Face ²Sorbonne Université ³valeo.ai, Paris, France

*The order was chosen randomly.

Abstract

The growing interest in vision-language models (VLMs) has been driven by improvements in large language models and vision transformers. Despite the abundance of literature on this subject, we observe that critical decisions regarding the design of VLMs are often not justified. We argue that these unsupported decisions impede progress in the field by making it difficult to identify which choices improve model performance. To address this issue, we conduct extensive experiments around pre-trained models, architecture choice, data, and training methods. Our consolidation of findings includes the development of Idefics2, an efficient foundational VLM of 8 billion parameters. Idefics2 achieves state-of-the-art performance within its size category across various multimodal benchmarks, and is often on par with models four times its size. We release the model (base, instructed, and chat) along with the datasets created for its training.

Prompt

For 2024, the interest expense is twice what it was in 2014, and the long-term debt is 10% higher than its 2015 level. Can you calculate the combined total of the interest and long-term debt for 2024?

	2014	2015
Sales	\$ 9,402	\$10,091
Depreciation	1,350	1,351
Cost of goods sold	3,235	3,672
Other expenses	767	641
Interest	630	724
Cash	4,931	6,244
Accounts receivable	6,527	7,352
Short-term notes payable	953	895
Long-term debt	16,152	19,260
Net fixed assets	41,346	42,332
Accounts payable	5,179	5,022
Inventory	11,604	11,926
Dividends	1,147	1,261

Idefics2 output

Yes, I can help you calculate that. First, let's find out the interest expense for 2024:

Interest Expense (2024) = 2 * Interest Expense (2014)
= 2 * 630
= 1260

Next, let's find the long-term debt for 2024:

Long-Term Debt (2024) = Long-Term Debt (2015) +
10% of Long-Term Debt (2015)
= 19,260 + 0.1 * 19,260
= 19,260 + 1,926
= 21,186

Now, we can add these two amounts together to get the combined total of the interest and long-term debt for 2024:

Combined Total (2024) = Interest Expense (2024) +
Long-Term Debt (2024)
= 1260 + 21,186
= 22,446

So, the combined total of the interest and long-term debt for 2024 is \$22,446.

Figure 1: Idefics2-chatty analyzes the table to compute and answer the query.

1 Introduction

Vision-language models (VLMs) that take images and texts as inputs and output texts, are useful for many tasks, like retrieving information in a scanned PDF (Hu et al., 2024), explaining charts or diagrams (Carbone et al., 2024), transcribing the text in an image (Blecher et al., 2023), counting objects in a picture (Goyal et al., 2017) or turning screenshots of webpages into code (Laurençon et al., 2024). The development of powerful open large language models (Touvron et al., 2023; Jiang et al., 2023; Team et al., 2024) and image encoders (Zhai et al., 2023; Sun et al., 2023; Radford et al., 2021) enables researchers to build upon these unimodal pre-trained models to create advanced VLMs that solve these problems with increasing accuracy (Dai et al., 2023; Liu et al., 2023; Bai et al., 2023; Lin et al., 2023; Li et al., 2023; Wang et al., 2023). Despite the progress in the field, the literature reveals many disparate design choices which are often not justified experimentally, or very briefly.

This situation makes it challenging to distinguish which decisions truly account for model performance, thereby making it difficult for the community to make meaningful and grounded progress. For instance, (Alayrac et al., 2022; Laurençon et al., 2023) use interleaved Transformer-based cross-attentions to fuse the image information into the language model, while (Li et al., 2023; Liu et al., 2023) concatenate the sequence of image hidden states with the sequence of text embeddings, and feed the concatenated sequence to the language model. To our knowledge, this choice has not been properly ablated, and trade-offs in terms of compute, data efficiency and performance are poorly understood. In this work, we aim to bring experimental clarity to some of these core design choices and pose the question: **What matters when building vision-language models?**

We identify two areas where various works adopt different design choices: (a) model architecture, and in particular, connector modules that fuse the vision and text modalities and their impact on inference efficiency, (b) multimodal training procedure and its impact on training stability. For each of these areas, we rigorously compare different design choices in a controlled environment and extract experimental findings. Notably, we find that (a) the progress of vision-language models is in large part driven by the progress of pre-trained unimodal backbones, (b) the more recent fully autoregressive architecture outperforms the cross-attention architecture, although it requires modifications to the optimization procedure to ensure a stable training, (c) adaptation of the pre-trained vision backbone and the modules connecting the text and vision modalities allow for more efficiency at inference time on one side, and handling images in their original ratio and size without harming downstream performance on the other side, and (d) modifications to the image processing enables trading inference cost for downstream performance.

Our results are complementary with those presented in (Karamcheti et al., 2024; McKinzie et al., 2024; Lin et al., 2023) which derive insights about multi-stage training, selective unfreezing of the pre-trained backbones, data repetition, and impact of training mixture on zero and few-shot performance. We specifically analyze unexplored aspects such as model architecture, training methods, stability, and efficiency improvements at inference. For example, we introduce the task of text transcription from PDFs directly in the pre-training, we justify the benefits of using synthetic captions in image-text pair datasets, we detail our multi-stage training procedure to save computational resources, and we create a large-scale instruction fine-tuning dataset.

Learning from these insights, we train Idefics2, a foundational VLM with 8 billion parameters. Idefics2 achieves state-of-the-art performance in its size category on various benchmarks while being more efficient at inference, for both the base and the fine-tuned version. It is on par with state-of-the-art models 4 times larger on some vision-language benchmarks and matches the performance of Gemini 1.5 Pro on some challenging benchmarks. We release the base, instructed, and chat versions of Idefics2¹ as resources for the VLM community along with the data created to train the model.

2 Terminology

We first establish shared terminology for discussing the different design choices. Training VLMs typically requires gluing together a pre-trained vision backbone and a pre-trained language backbone by initializing new parameters to connect the two modalities. Training these new parameters is done during the *pre-training phase*. This stage commonly leverages a large multimodal dataset such as image-caption pairs. We note that even though it is most common to start from two separate

¹<https://huggingface.co/collections/HuggingFaceM4/idefics2-661d1971b7c50831dd3ce0fe>

unimodal pre-trained backbones, the parameters of these two backbones can be optionally shared and initialized from scratch as done in (Bavishi et al., 2023). As in the large language models literature, the pre-training stage is followed by an instruction fine-tuning stage, in which the model learns from task-oriented samples.

Recent works explore two main choices to combine the visual inputs and the text inputs. In the *cross-attention architecture* (Alayrac et al., 2022; Laurençon et al., 2023; Awadalla et al., 2023), the images encoded through the vision backbone are injected at different layers within the language model by interleaving cross-attention blocks in which the text cross-attends to the image hidden states. In contrast, in the *fully autoregressive architecture* (Koh et al., 2023; Driess et al., 2023; Liu et al., 2023), the output of the vision encoder is directly concatenated to the sequence of text embeddings, and the entire sequence is passed as input to the language model. The input sequence of the language model is thus the concatenation of *visual tokens* and text tokens. The sequence of visual tokens can be optionally pooled into a shorter sequence, providing more compute efficiency. We refer to the layers that maps the vision hidden space to the text hidden space as *modality projection layers*. Figure 2 highlights the fully-autoregressive architecture we ultimately use for Idefics2.

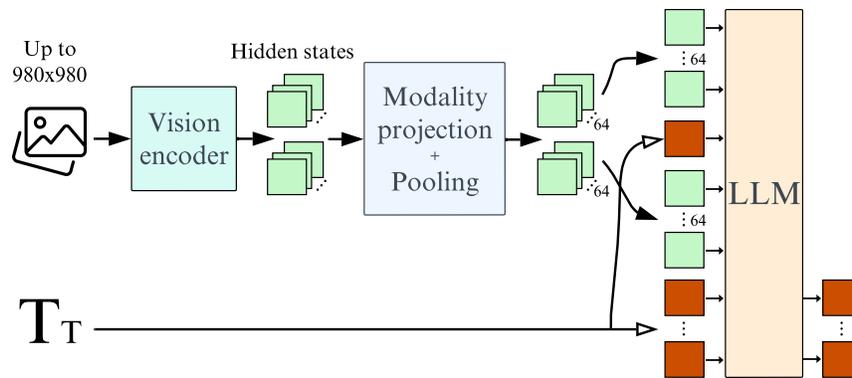


Figure 2: Idefics2 fully-autoregressive architecture: Input images are processed by the Vision encoder. The resulting visual features are mapped (and optionally pooled) to the *LLM* input space to get the visual tokens (64 in our standard configuration). They are concatenated (and potentially interleaved) with the input sequence of text embeddings (green and red column). The concatenated sequence is fed to the language model (*LLM*), which predicts the text tokens output.

3 Exploring the design space of vision-language models

In this section, we compare recurrent design choices in the vision-language model literature and highlight findings. Unless specified otherwise, we run the ablations for 6'000 steps and report the average score of the 4-shot performance on 4 downstream benchmarks measuring different capabilities: VQAv2 (Goyal et al., 2017) for general visual question answering, TextVQA (Singh et al., 2019) for OCR abilities, OKVQA (Marino et al., 2019) for external knowledge, and COCO (Lin et al., 2014) for captioning. We run the ablations on eight nodes containing eight H100s each, for up to five days.

3.1 Are all pre-trained backbones equivalent for VLMs?

Most recent VLMs start from pre-trained unimodal backbones. How does the choice of the backbones (vision and text) influence the performance of the resulting VLM?

We fix the size of the pretrained backbones, the data used for multi-modal pre-training, and the number of training updates. Under the cross-attention architecture, we observe that the greatest improvement in the performance on vision-language benchmarks comes from changing the language model to a better one. More specifically, replacing LLaMA-1-7B (Touvron et al., 2023) (35.1% on MMLU (Hendrycks et al., 2021)) by Mistral-7B (Jiang et al., 2023)

LM backbone	Avg. score
Llama-1-7B	62.5
Mistral-7B	67.6

Table 1: Ablation on the language model backbone.

(60.1% on MMLU) yields a boost of 5.1 (see Table 1). Additionally, switching the vision encoder from CLIP-ViT-H (Radford et al., 2021) (78.0% on ImageNet(Deng et al., 2009)) to SigLIP-SO400M (Zhai et al., 2023) (83.2% on ImageNet) yields a 3.3 increase in performance on the benchmarks (see Table 2). This result on better vision backbones corroborates observations from (Karamcheti et al., 2024).

We note that Chen and Wang (2022) reports a stronger increase in performance by scaling the size of the vision encoder compared to scaling the size of the language model even though scaling the vision encoder leads to a smaller parameter count increase. Although EVA-CLIP-5B (Sun et al., 2023) is ten times bigger in parameter counts than SigLIP-SO400M (Zhai et al., 2023), we obtain similar performance across 4 benchmarks, suggesting that EVA-CLIP-5B could be heavily under-trained, and we acknowledge that the open VLM community is missing a large well-trained vision encoder.

VE backbone	Res.	Avg. score
CLIP-ViT-H	224	57.4
EVA-CLIP-5B	224	60.2
SigLIP-SO400M	384	60.7

Table 2: Ablation on the vision encoder backbone.

Finding 1. Better pre-trained LLMs and vision encoders lead to better performance on multimodal tasks. However, with the best current models for both, the LLM has a higher impact.

3.2 How does the fully autoregressive architecture compare to the cross-attention architecture?

To our knowledge, there is no proper comparison between the fully autoregressive and the cross-attention architecture. We aim to fill this gap by considering their trade-offs, namely performance, parameter count, and inference cost.

Following (Alayrac et al., 2022), we first compare the two architectures by freezing the unimodal backbones and training only the newly initialized parameters (cross-attention on one side, and modality projection along with learned pooling on the other side), while fixing the amount of training data. Alayrac et al. (2022) shows that the more frequently the cross-attention blocks are interleaved with the language model layers, and the higher the vision-language performance. As such, we note that under this setup, the cross-attention architecture has 1.6B more trainable parameters (2.3B trainable parameters in total) than the fully autoregressive architecture. Additionally, at inference time, the former uses 10% more flops than the latter. Under these conditions, we observe that the cross-attention architecture performs 7 points better in Table 3.

Architecture	Backbones training	# params	# trainable params	Avg. score
Fully autoreg. no Perceiver	Frozen	7.6B	5M	51.8
Fully autoreg.	Frozen	8.3B	740M	60.3
Cross-attention	Frozen	10B	2.3B	66.7
Cross-attention	LoRA	10B	2.5B	67.3
Fully autoreg.	LoRA	8.3B	950M	69.5

Table 3: Ablation for the architecture and method of training.

Out of the total number of parameters, approximately 10% for the fully autoregressive architecture and 25% for the cross-attention are trained. We hypothesize that this low proportion limits the expressivity of the training and hinders performance. To test that hypothesis, we compare the two architectures by unfreezing all parameters (newly initialized parameters and parameters of the pre-trained unimodal backbones). Under these conditions, training the fully autoregressive architecture would yield loss divergences, and we were not successful in stabilizing the training even by aggressively lowering the learning rate or gradually unfreezing various components. To overcome this stability challenge, we leverage Low-Rank Adaptation (Hu et al., 2022) to adapt the pre-trained parameters while using standard full fine-tuning for the newly initialized ones.

This setup yields significantly more stable trainings, and more importantly, we observe a 12.9 points increase under the fully autoregressive architecture, and 0.6 point under the cross-attention architecture. While the cross-attention architecture performs better than the fully autoregressive architecture with frozen backbones, it is worse when we add degrees of liberty for the pre-trained backbones. Besides, using LoRA allows training the unimodal backbones at a fraction of the GPU memory cost of full fine-tuning, and LoRA layers can be merged back into the original linear layers

yielding no additional cost at inference. We therefore choose the fully autoregressive architecture in the rest of this work.

It is interesting to note that this finding contradicts (Karamcheti et al., 2024) in which the authors observed that unfreezing the pre-trained visual backbone would significantly degrade the performance. We hypothesize that using parameter-efficient fine-tuning methods is a key difference.

Finding 2. The cross-attention architecture performs better than the fully autoregressive one when unimodal pre-trained backbones are kept frozen. However, when training the unimodal backbones, the fully autoregressive architecture outperforms the cross-attention one, even though the latter has more parameters.

Finding 3. Unfreezing the pre-trained backbones under the fully autoregressive architecture can lead to training divergences. Leveraging LoRA still adds expressivity to the training and stabilizes it.

3.3 Where are the efficiency gains?

Number of visual tokens Recent VLMs typically route the entire sequence of the vision encoder’s hidden states directly into the modality projection layer, which subsequently inputs into the language model, with no pooling. This is motivated by previous works in which adding a pooling strategy, like average pooling, was found to deteriorate the performance (Vallaeyts et al., 2024). This results in a high number of visual tokens for each image ranging from 576 for DeepSeek-VL (Lu et al., 2024) to 2890 for SPHINX-2k (Lin et al., 2023). With the resulting sequence lengths, training is computationally costly, and in-context learning with interleaved images and texts is challenging because it requires modifications to the language models to handle very large context windows.

We reduce the sequence length of each image’s hidden states by using a perceiver resampler (Jaegle et al., 2021) as a form of trainable Transformer-based pooling. The number of queries (also referred to as latents) corresponds to the number of resulting visual tokens after the pooling (from one for classification Touvron et al. (2021) to several in Alayrac et al. (2022) or a growing number for continual learning Douillard et al. (2022)). We observe that the learned pooling is effective in two ways: it increases the performance by 8.5 points on average and reduces the number of visual tokens necessary for each image from 729 to 64 (see Table 3).

In contrast to (Vallaeyts et al., 2024; McKinzie et al., 2024) which find that the more visual tokens the higher the performance, we observe no gains when using more than 64 visual tokens. Other variations over the Perceiver architecture (Mafias et al., 2023; Darcet et al., 2024; Vallaeyts et al., 2024) resulted in decreased performance.

Pooling	# vis. tok.	Avg. score
Perceiver	128	71.2
Perceiver	64	71.7

Table 4: Ablation on the pooling strategy.

Finding 4. Reducing the number of visual tokens with learned pooling significantly improves compute efficiency at training and inference while improving performance on non-OCR downstream tasks.

Preserving the original aspect ratio and image resolution Vision encoders, such as SigLIP, are typically trained on fixed-size square images. Resizing images alters their original aspect ratio, which is problematic, for instance, for tasks requiring reading long texts. Furthermore, conditioning the training on a single resolution size inherently introduces limitations: a low resolution omits crucial visual details, while a high resolution leads to inefficiency in training and inference. Allowing the model to encode images at various resolutions allows users to decide how much compute is spent on each image.

Following Lee et al. (2023); Dehghani et al. (2023), we pass the image patches to the vision encoder without resizing the image or modifying its aspect ratio. Given that SigLIP was trained on fixed-size low-resolution square images, we interpolate the pre-trained positional embeddings to allow for

Images	Res.	Avg. score
Square images	768	73.1
AR preserving	378-768	72.1

Table 5: Ablation on the aspect-ratio preserving strategy.

a higher resolution and train the vision encoder with LoRA parameters to adapt to these modifications.²

Our findings indicate that the aspect ratio preserving strategy maintains performance levels on downstream tasks while unlocking computational flexibility during both training and inference (see Table 5). In particular, not having to resize images to the same high resolution allows for saving GPU memory and handling images at the resolution they require.

Finding 5. Adapting a vision encoder pre-trained on fixed-size square images to preserve images' original aspect ratio and resolution does not degrade performance while speeding up training and inference and reducing memory.

3.4 How can one trade compute for performance?

(Lin et al., 2023; Li et al., 2023; Liu et al., 2024; McKinzie et al., 2024) show that splitting an image into sub-images allows boosting the downstream performance with no changes to the model's signature. An image is decomposed into sub-images (for instance 4 equal sub-images), which are then concatenated to the original image to form a sequence of 5 images. Additionally, the sub-images are resized to the original image's size. This strategy however comes at the cost of a much higher number of tokens to encode the images.

We adopt this strategy during the instruction fine-tuning stage. Each single image becomes a list of 5 images: 4 crops and the original image. This way, at inference, the model is able to deal with standalone images (64 visual tokens per image), as well as artificially augmented images (320 visual tokens in total per image). We notice that this strategy is particularly useful for benchmarks like TextVQA and DocVQA, which require a sufficiently high resolution to extract the text in an image (see Table 9).

Moreover, when we apply image splitting to only 50% of the training samples (instead of 100% of the samples), we observe that it does not impair the performance increase that image splitting provides. Surprisingly, we find at evaluation time that increasing the resolution of the sub-images (and the standalone image) provides only a minor boost in performance compared to the improvement yielded by sole image splitting: 73.6% when increasing the resolution of the sub-images to the maximum vs 73.0% accuracy on our validation set of TextVQA, and respectively 72.7 vs 72.9 ANLS on the validation set of DocVQA.

Finding 6. Splitting images into sub-images during training allow trading compute efficiency for more performance during inference. The increase in performance is particularly noticeable in tasks involving reading text in an image.

4 Idefics2 - an open state-of-the-art vision-language foundation model

With these learnings in hand, we train an open 8B parameters vision-language model: Idefics2. This section describes the construction of the model, the choice of the dataset, the sequence of training phases and compares the resulting model against VLMS baselines.

4.1 Multi-stage pre-training

We start from SigLIP-SO400M and Mistral-7B-v0.1 and pre-train Idefics2 on 3 types of data.

Interleaved image-text documents We use OBELICS (Laurençon et al., 2023), an open web-scale dataset of interleaved image-text documents with 350 million images and 115 billion text tokens. As shown by the authors, the long documents of OBELICS allow for preserving the performance of the language model while learning to deal with an arbitrary number of interleaved images and texts and long context. Additionally, the authors show that interleaved image-text documents are the biggest driving factor in increasing the performance on visual question answering (VQA) tasks, in particular

²Since SigLIP is trained with a fixed resolution, the positional embeddings can be interpreted both as absolute or relative positions. With the aspect ratio and resolution preserving, these positions become relative positional embeddings.

in the in-context learning setup. We perform an additional removal of newly opted-out content in January 2024 using the Spawning API³ even though OBELICS had already been filtered to exclude opted-out content as of September 2023. We also removed the 5% of documents with the highest perplexity scores, as computed by Falcon-1B (Penedo et al., 2023).

Image-text pairs Training on image-text pairs allows the model to learn the alignment between images and their associated texts. We use a combination of high-quality human-annotated image-text pairs from PMD (Singh et al., 2022) and higher-noise web-scale image-text pairs from (Schuhmann et al., 2022). To limit the amount of poor-quality data, we opt for the synthetic captions obtained through the LAION COCO⁴ version of the dataset where images have been captioned with a model trained on COCO. This improves the quality of the training samples and thus the quality of the resulting model (see Table 6). We use a NSFW classifier⁵ with a high recall and remove 7% of the samples in LAION COCO. We manually inspect 5’000 examples and found 28 pornographic images in the original LAION COCO and only 1 after filtering. This filtering does not negatively impact the downstream performance.

PDF documents Sun et al. (2023) shows that a large proportion of mistakes of state-of-the-art VLMs stem from their failure to accurately extract text in images or documents. In order to obtain strong OCR and document understanding abilities, we train Idefics2 on different sources of PDF documents: 19 million industry documents from OCR-IDL (Biten et al., 2022) and 18 million pages from PDFFA⁶. Moreover, we add Rendered Text⁷ to complement the dataset with texts written with a wide variety of fonts and colors and on diverse backgrounds. These integrations significantly boost the performance on benchmarks that require reading text without decreasing the performance on other benchmarks (see Table 7).

To maximize compute efficiency, we decompose the pre-training in two stages. In the first stage, we limit the max image resolution to 384 pixels, which allows us to use a large global batch size of 2’048 (17k images and 2.5M text tokens on average). We sample OBELICS for 70% of the examples with a maximum sequence length of 2’048, and the image-text pairs datasets for 30% of the examples with a maximum sequence length of 1’536. In the second stage, we introduce PDF documents. Since they require a higher image resolution for the text to be legible, we increase the resolution to a maximum of 980 pixels. We use the same global batch size, but have to decrease the per-device batch size and use gradient accumulation to compensate for the additional memory cost. OBELICS represents 45% of the examples with a maximum sequence length of 2’048, image-text pairs represent 35% of the examples with a maximum sequence length of 1’536, and PDF documents represent the remaining 20% of the examples with a maximum sequence length of 1’024. Additionally, we randomly scale up images to adequately cover the distribution of potential image sizes. We emphasize that the training stages are different than the ones ablated in (Karamcheti et al., 2024): instead of selectively freezing/unfreezing parts of the model, we train the entire model during both stages (some parameters are trained with LoRA) and increase the image resolution from one stage to the other.

We use a learning rate of 10^{-4} with AdamW for the optimizer, and do around 2 epochs on our training data. It corresponds to approximately 1.5 billion images and 225 billion text tokens. We note that this is orders of magnitude more training data than other open VLMs. For example, ShareGPT (Chen et al., 2023) uses 1.2 million images, while Monkey (Li et al., 2023) uses 1.4 million for training. In total, we use 32 nodes of eight H100s each for 3 weeks for the multi-stage pre-training.

To evaluate the base model, we consider VQAv2 (Goyal et al., 2017), TextVQA (Singh et al., 2019), OKVQA (Marino et al., 2019), and COCO (Lin et al., 2014). Table 8 presents the results. While having fewer tokens per image, and thus being more efficient, Idefics2-base performs favorably

Captions	Avg. score
Alt-texts	49.8
Synthetic	52.9

Table 6: Ablation on synthetic captions against alt-text for image-text pairs.

OCR data	Res.	DocVQA
W/o	384	22.6
W/o	768	42.9
W/	768	49.9

Table 7: Ablation on the synergy between OCR data and image resolution. We pre-trained the models for 5’500 steps, followed by 500 steps of fine-tuning on DocVQA.

³<https://spawning.ai/>

⁴<https://laion.ai/blog/laion-coco/>

⁵<https://github.com/LAION-AI/LAION-SAFETY>

⁶<https://huggingface.co/datasets/pixparse/pdfa-eng-wds>

⁷<https://huggingface.co/datasets/wendlerc/RenderedText>

Model	Size	Archi.	# tokens per image	VQAv2	TextVQA	OKVQA	COCO
OpenFlamingo	9B	CA	-	54.8	29.1	41.1	96.3
Idefics1	9B	CA	-	56.4	27.5	47.7	97.0
Flamingo	9B	CA	-	58.0	33.6	50.0	99.0
MM1	7B	FA	144	63.6	46.3	51.4	116.3
Idefics2-base	8B	FA	64	70.3	57.9	54.6	116.0

Table 8: Performance of Idefics2-base against state-of-the-art base VLMs. The evaluations were done with 8 random in-context examples, and in an open-ended setting for VQA tasks.

FA: fully autoregressive architecture. CA: cross-attention architecture.

(Task, Metric, Split): (VQAv2, VQA acc., testdev), (TextVQA, VQA acc., val), (OKVQA, VQA acc., val), (COCO, CIDEr, test)

compared to the other current best base VLMs (OpenFlamingo (Awadalla et al., 2023), Idefics1 (Laurençon et al., 2023), Flamingo (Alayrac et al., 2022), and MM1 (McKinzie et al., 2024)). It is notably much better at reading texts in an image. Figure 3 shows an example of an output from the base model on a task similar to the pre-training.

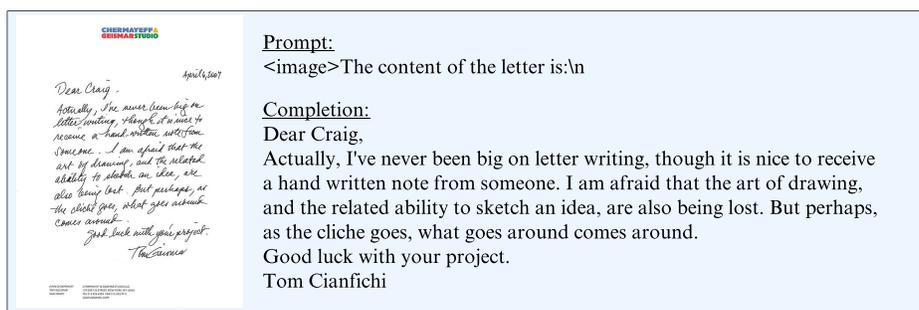


Figure 3: An example of text transcription with Idefics2-base.

4.2 Instruction fine-tuning

We continue the training with an instruction fine-tuning phase.

To do so, we create and release The Cauldron⁸, a massive collection of 50 vision-language datasets, covering a wide range of tasks: general visual question answering, counting, captioning, text transcription, document understanding, chart/figure understanding, table understanding, visual reasoning, geometry, spotting differences between 2 images or converting a screenshot to a functional code. Similarly to (Sanh et al., 2022; Wei et al., 2022; Bach et al., 2022; Dai et al., 2023; Li et al., 2023), each dataset is prompted into a shared question/answer format. When there are multiple question/answer pairs per image, we concatenate the pairs into a multi-turn conversation. We deduplicate the training set against the evaluation sets, ensuring that there is minimum contamination from the training to the evaluation.

In addition to these vision-language datasets and following insights from (McKinzie et al., 2024), we add text-only instruction datasets to the mixture. The datasets aim at teaching the model to follow complex instructions, solve mathematical problems, or do arithmetic calculations. We give more details about the chosen datasets, the number of images, question-answer pairs, and size of each of the subsets, as well as our selected mixture proportion in Table 14 in Appendix A.2.1.

We instruction-tune the base model using DoRA (Liu et al., 2024) (a variant of LoRA). During the fine-tuning, we only compute the loss on the tokens of the answers in the Q/A pairs. Since we are doing many epochs over some of the datasets, we employ several strategies to lower the risk of overfitting. First, we add noise to the embeddings with the NEFTune (Jain et al., 2024) technique.

⁸https://huggingface.co/datasets/HuggingFaceM4/the_cauldron

Model	Size	# tokens per image	MMMU	MathVista	TextVQA	MMBench
LLaVA-NeXT	13B	2880	36.2/-	35.3	67.1	70.0
DeepSeek-VL	7B	576	36.6/-	36.1	64.4	73.2
MM1-Chat	7B	720	37.0/35.6	35.9	72.8	72.3
Idefics2	8B	64	43.5/37.9	51.6	70.4	76.8
Idefics2	8B	320	43.0/37.7	51.4	73.0	76.7

Table 9: Performance of Idefics2 against state-of-the-art VLMs up to a size of 14B parameters. The evaluations are done in zero shot. Idefics2 with 64 or 320 tokens per image is the same model (same weights), only the inference differs. The full table is present in Appendix A.3.2.

(*Benchmark, Split, Metric*): (MMMU, *val/test*, MMMU score), (MathVista, *testmini*, MMMU score), (TextVQA, *val*, VQA acc.), (MMBench, *test*, accuracy).

Then, we scale up randomly the resolution of the images during the training. Finally, when applicable, we shuffle the multiple user/assistant turns randomly before feeding the example to the model.

We evaluate Idefics2 on commonly adopted benchmarks: MMMU (Yue et al., 2024) for multidiscipline college-level problems, MathVista (Lu et al., 2024) for mathematical reasoning, TextVQA (Singh et al., 2019) for text reading on natural images, and MMBench Liu et al. (2023) for various perception and reasoning tasks. Table 9 presents the results (see Table 15 for the complete result table) of Idefics2 against the current strongest VLMs in its class size: LLaVA-Next (Liu et al., 2024), DeepSeek-VL (Lu et al., 2024) and MM1-Chat (McKinzie et al., 2024). While being computationally much more efficient at inference, Idefics2 exhibits strong performance on various benchmarks, outperforming the current best foundation VLMs in its size category. It is on par with state-of-the-art models 4x its size, or with closed-source models like Gemini 1.5 Pro on several benchmarks like MathVista or TextVQA. The detailed performance of Idefics2 across each category of MMMU (Yue et al., 2024) is present in Table 16.

4.3 Optimizing for chat scenarios

The evaluation benchmarks expect very short answers, but humans prefer long generations when interacting with a model. We find that Idefics2 can exhibit difficulties in precisely following instructions about the expected format, making it difficult to reconcile “chattiness” and downstream performance. As such, after instruction fine-tuning, we further train Idefics2 on dialogue data. We fine-tune Idefics2 for a few hundred steps on LLaVA-Conv (Liu et al., 2023) and ShareGPT4V (Chen et al., 2023), with a large batch size. Our blind human evaluations reveal that Idefics2-chatty is overwhelmingly preferred over its instruction fine-tuned version in many user interactions. We also adversarially stress-tested the model to generate inaccurate, biased, or offensive responses and reported the findings in Appendix A.5. We show examples of generations with Idefics2-chatty in Figure 1, and in Appendix in Figures 5, 6 and 7.

5 Conclusion

In this work, we re-examine common choices made in the VLM literature and rigorously compare these choices in controlled experiments. Our findings touch upon the effectiveness of different architectures, their performance/inference cost trade-offs as well as training stability. With these learnings at hand, we train Idefics2, an open 8B parameters vision-language model. Idefics2 is state-of-the-art on various benchmarks in its category size and is much more efficient at inference. By releasing our findings, as well as our models and our training dataset, we aim to contribute to the ongoing evolution of VLMs and their applications in solving complex real-world problems.

Acknowledgement

We thank Mustafa Shukor for helpful suggestions on the paper, and Yacine Jernite, Sasha Luccioni, Margaret Mitchell, Giada Pistilli, Lucie-Aimée Kaffee, and Jack Kumar for red-teaming the model.

References

- Acharya, M., K. Kafle, and C. Kanan (2019). Tallyqa: Answering complex counting questions. In *AAAI*.
- Achiam, J., S. Adler, S. Agarwal, L. Ahmad, I. Akkaya, F. L. Aleman, D. Almeida, J. Altschmidt, S. Altman, S. Anadkat, et al. (2023). Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*.
- Agrawal, H., K. Desai, Y. Wang, X. Chen, R. Jain, M. Johnson, D. Batra, D. Parikh, S. Lee, and P. Anderson (2019, October). nocaps: novel object captioning at scale. In *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE.
- Alayrac, J.-B., J. Donahue, P. Luc, A. Miech, I. Barr, Y. Hasson, K. Lenc, A. Mensch, K. Millican, M. Reynolds, R. Ring, E. Rutherford, S. Cabi, T. Han, Z. Gong, S. Samangooei, M. Monteiro, J. L. Menick, S. Borgeaud, A. Brock, A. Nematzadeh, S. Sharifzadeh, M. a. Bińkowski, R. Barreira, O. Vinyals, A. Zisserman, and K. Simonyan (2022). Flamingo: a visual language model for few-shot learning. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (Eds.), *Advances in Neural Information Processing Systems*, Volume 35, pp. 23716–23736. Curran Associates, Inc.
- Antol, S., A. Agrawal, J. Lu, M. Mitchell, D. Batra, C. L. Zitnick, and D. Parikh (2015). VQA: Visual Question Answering. In *International Conference on Computer Vision (ICCV)*.
- Awadalla, A., I. Gao, J. Gardner, J. Hessel, Y. Hanafy, W. Zhu, K. Marathe, Y. Bitton, S. Gadre, S. Sagawa, et al. (2023). Openflamingo: An open-source framework for training large autoregressive vision-language models. *arXiv preprint arXiv:2308.01390*.
- Bach, S., V. Sanh, Z. X. Yong, A. Webson, C. Raffel, N. V. Nayak, A. Sharma, T. Kim, M. S. Bari, T. Fevry, Z. Alyafeai, M. Dey, A. Santilli, Z. Sun, S. Ben-david, C. Xu, G. Chhablani, H. Wang, J. Fries, M. Al-shaibani, S. Sharma, U. Thakker, K. Almubarak, X. Tang, D. Radev, M. T.-j. Jiang, and A. Rush (2022, May). PromptSource: An integrated development environment and repository for natural language prompts. In V. Basile, Z. Kozareva, and S. Stajner (Eds.), *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, Dublin, Ireland, pp. 93–104. Association for Computational Linguistics.
- Bai, J., S. Bai, S. Yang, S. Wang, S. Tan, P. Wang, J. Lin, C. Zhou, and J. Zhou (2023). Qwen-vl: A versatile vision-language model for understanding, localization, text reading, and beyond.
- Bavishi, R., E. Elsen, C. Hawthorne, M. Nye, A. Odena, A. Somani, and S. Taşirlar (2023). Introducing our multimodal models.
- Belouadi, J., A. Lauscher, and S. Eger (2023). Automatizk: Text-guided synthesis of scientific vector graphics with tikz. *arXiv preprint arXiv:2310.00367*.
- Biten, A. F., R. Tito, L. Gomez, E. Valveny, and D. Karatzas (2022). Ocr-idl: Ocr annotations for industry document library dataset. In *European Conference on Computer Vision*, pp. 241–252. Springer.
- Biten, A. F., R. Tito, A. Mafla, L. Gomez, M. Rusiñol, C. Jawahar, E. Valveny, and D. Karatzas (2019). Scene text visual question answering. In *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 4290–4300.
- Blecher, L., G. Cucurull, T. Scialom, and R. Stojnic (2023). Nougat: Neural optical understanding for academic documents. *arXiv preprint arXiv:2308.13418*.
- Brown, T., B. Mann, N. Ryder, M. Subbiah, J. D. Kaplan, P. Dhariwal, A. Neelakantan, P. Shyam, G. Sastry, A. Askell, S. Agarwal, A. Herbert-Voss, G. Krueger, T. Henighan, R. Child, A. Ramesh, D. Ziegler, J. Wu, C. Winter, C. Hesse, M. Chen, E. Sigler, M. Litwin, S. Gray, B. Chess, J. Clark, C. Berner, S. McCandlish, A. Radford, I. Sutskever, and D. Amodei (2020). Language models are few-shot learners. In H. Larochelle, M. Ranzato, R. Hadsell, M. Balcan, and H. Lin (Eds.), *Advances in Neural Information Processing Systems*, Volume 33, pp. 1877–1901. Curran Associates, Inc.

- Carbone, V., H. Mansoor, F. Liu, R. Aralikkatte, G. Baechler, J. Chen, and A. Sharma (2024). Chart-based reasoning: Transferring capabilities from llms to vlms. *arXiv preprint arXiv:2403.12596*.
- Chang, S., D. Palzer, J. Li, E. Fosler-Lussier, and N. Xiao (2022). MapQA: A dataset for question answering on choropleth maps. In *NeurIPS 2022 First Table Representation Workshop*.
- Changpinyo, S., P. Sharma, N. Ding, and R. Soricut (2021). Conceptual 12M: Pushing web-scale image-text pre-training to recognize long-tail visual concepts. In *CVPR*.
- Chen, L., J. Li, X. Dong, P. Zhang, C. He, J. Wang, F. Zhao, and D. Lin (2023). Sharegpt4v: Improving large multi-modal models with better captions. *arXiv preprint arXiv:2311.12793*.
- Chen, X., J. Djolonga, P. Padlewski, B. Mustafa, S. Changpinyo, J. Wu, C. R. Ruiz, S. Goodman, X. Wang, Y. Tay, et al. (2023). Pali-x: On scaling up a multilingual vision and language model. *arXiv preprint arXiv:2305.18565*.
- Chen, X. and X. Wang (2022). Pali: Scaling language-image learning in 100+ languages. In *Conference on Neural Information Processing Systems (NeurIPS)*.
- Chen, X., X. Wang, L. Beyer, A. Kolesnikov, J. Wu, P. Voigtlaender, B. Mustafa, S. Goodman, I. Alabdulmohsin, P. Padlewski, et al. (2023). Pali-3 vision language models: Smaller, faster, stronger. *arXiv preprint arXiv:2310.09199*.
- Chen, Z., W. Chen, C. Smiley, S. Shah, I. Borova, D. Langdon, R. Moussa, M. Beane, T.-H. Huang, B. Routledge, and W. Y. Wang (2021, November). FinQA: A dataset of numerical reasoning over financial data. In M.-F. Moens, X. Huang, L. Specia, and S. W.-t. Yih (Eds.), *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, Online and Punta Cana, Dominican Republic, pp. 3697–3711. Association for Computational Linguistics.
- Cheng, Z., H. Dong, Z. Wang, R. Jia, J. Guo, Y. Gao, S. Han, J.-G. Lou, and D. Zhang (2022, May). HiTab: A hierarchical table dataset for question answering and natural language generation. In S. Muresan, P. Nakov, and A. Villavicencio (Eds.), *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, Dublin, Ireland, pp. 1094–1110. Association for Computational Linguistics.
- Chu, X., L. Qiao, X. Zhang, S. Xu, F. Wei, Y. Yang, X. Sun, Y. Hu, X. Lin, B. Zhang, et al. (2024). Mobilevlm v2: Faster and stronger baseline for vision language model. *arXiv preprint arXiv:2402.03766*.
- Conover, M., M. Hayes, A. Mathur, J. Xie, J. Wan, S. Shah, A. Ghodsi, P. Wendell, M. Zaharia, and R. Xin (2023). Free dolly: Introducing the world’s first truly open instruction-tuned llm. <https://www.databricks.com/blog/2023/04/12/dolly-first-open-commercially-viable-instruction-tuned-llm>. Accessed: 2023-06-30.
- Dai, W., J. Li, D. Li, A. Tiong, J. Zhao, W. Wang, B. Li, P. Fung, and S. Hoi (2023). InstructBLIP: Towards general-purpose vision-language models with instruction tuning. In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Darcet, T., M. Oquab, J. Mairal, and P. Bojanowski (2024). Vision transformers need registers. In *The Twelfth International Conference on Learning Representations*.
- Dehghani, M., J. Djolonga, B. Mustafa, P. Padlewski, J. Heek, J. Gilmer, A. P. Steiner, M. Caron, R. Geirhos, I. Alabdulmohsin, R. Jenatton, L. Beyer, M. Tschannen, A. Arnab, X. Wang, C. Riquelme Ruiz, M. Minderer, J. Puigcerver, U. Evci, M. Kumar, S. V. Steenkiste, G. F. Elsayed, A. Mahendran, F. Yu, A. Oliver, F. Huot, J. Bastings, M. Collier, A. A. Gritsenko, V. Birodkar, C. N. Vasconcelos, Y. Tay, T. Mensink, A. Kolesnikov, F. Pavetic, D. Tran, T. Kipf, M. Lucic, X. Zhai, D. Keysers, J. J. Harmsen, and N. Houlsby (2023, 23–29 Jul). Scaling vision transformers to 22 billion parameters. In A. Krause, E. Brunskill, K. Cho, B. Engelhardt, S. Sabato, and J. Scarlett (Eds.), *Proceedings of the 40th International Conference on Machine Learning*, Volume 202 of *Proceedings of Machine Learning Research*, pp. 7480–7512. PMLR.

- Dehghani, M., B. Mustafa, J. Djolonga, J. Heek, M. Minderer, M. Caron, A. P. Steiner, J. Puigcerver, R. Geirhos, I. Alabdulmohsin, A. Oliver, P. Padlewski, A. A. Gritsenko, M. Lucic, and N. Houlsby (2023). Patch n' pack: Navit, a vision transformer for any aspect ratio and resolution. In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Deng, J., W. Dong, R. Socher, L.-J. Li, K. Li, and L. Fei-Fei (2009). Imagenet: A large-scale hierarchical image database. In *2009 IEEE Conference on Computer Vision and Pattern Recognition*, pp. 248–255.
- Desai, K., G. Kaul, Z. Aysola, and J. Johnson (2021). Redcaps: Web-curated image-text data created by the people, for the people. In J. Vanschoren and S. Yeung (Eds.), *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks*, Volume 1. Curran.
- Douillard, A., A. Ramé, G. Couairon, and M. Cord (2022, June). Dytox: Transformers for continual learning with dynamic token expansion. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 9285–9295.
- Driess, D., F. Xia, M. S. M. Sajjadi, C. Lynch, A. Chowdhery, B. Ichter, A. Wahid, J. Tompson, Q. Vuong, T. Yu, W. Huang, Y. Chebotar, P. Sermanet, D. Duckworth, S. Levine, V. Vanhoucke, K. Hausman, M. Toussaint, K. Greff, A. Zeng, I. Mordatch, and P. Florence (2023). Palm-e: an embodied multimodal language model. In *Proceedings of the 40th International Conference on Machine Learning, ICML'23*. JMLR.org.
- Gao, P., R. Zhang, C. Liu, L. Qiu, S. Huang, W. Lin, S. Zhao, S. Geng, Z. Lin, P. Jin, et al. (2024). Sphinx-x: Scaling data and parameters for a family of multi-modal large language models. *arXiv preprint arXiv:2402.05935*.
- Goyal, Y., T. Khot, D. Summers-Stay, D. Batra, and D. Parikh (2017). Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 6325–6334.
- He, X., Y. Zhang, L. Mou, E. Xing, and P. Xie (2020). Pathvqa: 30000+ questions for medical visual question answering. *arXiv preprint arXiv:2003.10286*.
- Hendrycks, D., C. Burns, S. Basart, A. Zou, M. Mazeika, D. Song, and J. Steinhardt (2021). Measuring massive multitask language understanding. In *International Conference on Learning Representations*.
- Hong, W., W. Wang, Q. Lv, J. Xu, W. Yu, J. Ji, Y. Wang, Z. Wang, Y. Dong, M. Ding, et al. (2023). Cogagent: A visual language model for gui agents. *arXiv preprint arXiv:2312.08914*.
- Hu, A., H. Xu, J. Ye, M. Yan, L. Zhang, B. Zhang, C. Li, J. Zhang, Q. Jin, F. Huang, et al. (2024). mplug-docowl 1.5: Unified structure learning for ocr-free document understanding. *arXiv preprint arXiv:2403.12895*.
- Hu, E. J., yelong shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen (2022). LoRA: Low-rank adaptation of large language models. In *International Conference on Learning Representations*.
- Huang, S., L. Dong, W. Wang, Y. Hao, S. Singhal, S. Ma, T. Lv, L. Cui, O. K. Mohammed, B. Patra, Q. Liu, K. Aggarwal, Z. Chi, J. Bjorck, V. Chaudhary, S. Som, X. Song, and F. Wei (2023). Language is not all you need: Aligning perception with language models. In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Hudson, D. A. and C. D. Manning (2019). Gqa: A new dataset for real-world visual reasoning and compositional question answering. In *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 6693–6702.
- Iyyer, M., W.-t. Yih, and M.-W. Chang (2017, July). Search-based neural structured learning for sequential question answering. In R. Barzilay and M.-Y. Kan (Eds.), *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, Vancouver, Canada, pp. 1821–1831. Association for Computational Linguistics.

- Jaegle, A., F. Gimeno, A. Brock, O. Vinyals, A. Zisserman, and J. Carreira (2021, 18–24 Jul). Perceiver: General perception with iterative attention. In M. Meila and T. Zhang (Eds.), *Proceedings of the 38th International Conference on Machine Learning*, Volume 139 of *Proceedings of Machine Learning Research*, pp. 4651–4664. PMLR.
- Jain, N., P. Yeh Chiang, Y. Wen, J. Kirchenbauer, H.-M. Chu, G. Somepalli, B. R. Bartoldson, B. Kailkhura, A. Schwarzschild, A. Saha, M. Goldblum, J. Geiping, and T. Goldstein (2024). NEFTune: Noisy embeddings improve instruction finetuning. In *The Twelfth International Conference on Learning Representations*.
- Jhamtani, H. et al. (2018, October–November). Learning to describe differences between pairs of similar images. In E. Riloff, D. Chiang, J. Hockenmaier, and J. Tsujii (Eds.), *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, Brussels, Belgium, pp. 4024–4034. Association for Computational Linguistics.
- Jiang, A. Q., A. Sablayrolles, A. Mensch, C. Bamford, D. S. Chaplot, D. d. l. Casas, F. Bressand, G. Lengyel, G. Lample, L. Saulnier, et al. (2023). Mistral 7b. *arXiv preprint arXiv:2310.06825*.
- Johnson, J., B. Hariharan, L. van der Maaten, L. Fei-Fei, C. L. Zitnick, and R. Girshick (2017). Clevr: A diagnostic dataset for compositional language and elementary visual reasoning. In *2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 1988–1997.
- Kafle, K., S. Cohen, B. Price, and C. Kanan (2018). Dvqa: Understanding data visualizations via question answering. In *CVPR*.
- Kahou, S. E., V. Michalski, A. Atkinson, Á. Kádár, A. Trischler, and Y. Bengio (2017). Figureqa: An annotated figure dataset for visual reasoning. *arXiv preprint arXiv:1710.07300*.
- Karamcheti, S., S. Nair, A. Balakrishna, P. Liang, T. Kollar, and D. Sadigh (2024). Prismatic vlms: Investigating the design space of visually-conditioned language models. *arXiv preprint arXiv:2402.07865*.
- Kazemi, M., H. Alvari, A. Anand, J. Wu, X. Chen, and R. Soricut (2024). Geomverse: A systematic evaluation of large models for geometric reasoning. In *Synthetic Data for Computer Vision Workshop @ CVPR 2024*.
- Kembhavi, A., M. Salvato, E. Kolve, M. Seo, H. Hajishirzi, and A. Farhadi (2016). A diagram is worth a dozen images. In B. Leibe, J. Matas, N. Sebe, and M. Welling (Eds.), *Computer Vision – ECCV 2016*, Cham, pp. 235–251. Springer International Publishing.
- Kembhavi, A., M. Seo, D. Schwenk, J. Choi, A. Farhadi, and H. Hajishirzi (2017). Are you smarter than a sixth grader? textbook question answering for multimodal machine comprehension. In *2017 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 5376–5384.
- Kiela, D., H. Firooz, A. Mohan, V. Goswami, A. Singh, P. Ringshia, and D. Testuggine (2020). The hateful memes challenge: Detecting hate speech in multimodal memes. In H. Larochelle, M. Ranzato, R. Hadsell, M. Balcan, and H. Lin (Eds.), *Advances in Neural Information Processing Systems*, Volume 33, pp. 2611–2624. Curran Associates, Inc.
- Kingma, D. and J. Ba (2015). Adam: A method for stochastic optimization. In *International Conference on Learning Representations (ICLR)*, San Diego, CA, USA.
- Koh, J. Y., R. Salakhutdinov, and D. Fried (2023). Grounding language models to images for multimodal inputs and outputs.
- Lau, J., S. Gayen, A. Ben Abacha, and D. Demner-Fushman (2018, 11). A dataset of clinically generated visual questions and answers about radiology images. *Scientific Data* 5, 180251.
- Laurençon, H., L. Saulnier, T. Wang, C. Akiki, A. Villanova del Moral, T. Le Scao, L. Von Werra, C. Mou, E. González Ponferrada, H. Nguyen, J. Froberg, M. Šaško, Q. Lhoest, A. McMillan-Major, G. Dupont, S. Biderman, A. Rogers, L. Ben allal, F. De Toni, G. Pistilli, O. Nguyen, S. Nikpoor, M. Masoud, P. Colombo, J. de la Rosa, P. Villegas, T. Thrush, S. Longpre, S. Nagel,

- L. Weber, M. Muñoz, J. Zhu, D. Van Strien, Z. Alyafeai, K. Almubarak, M. C. Vu, I. Gonzalez-Dios, A. Soroa, K. Lo, M. Dey, P. Ortiz Suarez, A. Gokaslan, S. Bose, D. Adelani, L. Phan, H. Tran, I. Yu, S. Pai, J. Chim, V. Lepercq, S. Ilic, M. Mitchell, S. A. Luccioni, and Y. Jernite (2022). The bigscience roots corpus: A 1.6tb composite multilingual dataset. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (Eds.), *Advances in Neural Information Processing Systems*, Volume 35, pp. 31809–31826. Curran Associates, Inc.
- Laurençon, H., L. Saulnier, L. Tronchon, S. Bekman, A. Singh, A. Lozhkov, T. Wang, S. Karamcheti, A. M. Rush, D. Kiela, M. Cord, and V. Sanh (2023). OBELICS: An open web-scale filtered dataset of interleaved image-text documents. In *Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track*.
- Laurençon, H., L. Tronchon, and V. Sanh (2024). Unlocking the conversion of web screenshots into html code with the websight dataset. *arXiv preprint arXiv:2403.09029*.
- Lee, B.-K., B. Park, C. W. Kim, and Y. M. Ro (2024). Moai: Mixture of all intelligence for large language and vision models. *arXiv preprint arXiv:2403.07508*.
- Lee, K., M. Joshi, I. Turc, H. Hu, F. Liu, J. Eisenschlos, U. Khandelwal, P. Shaw, M.-W. Chang, and K. Toutanova (2023). Pix2struct: screenshot parsing as pretraining for visual language understanding. In *Proceedings of the 40th International Conference on Machine Learning, ICML'23*. JMLR.org.
- Li, B., R. Wang, G. Wang, Y. Ge, Y. Ge, and Y. Shan (2023). Seed-bench: Benchmarking multimodal llms with generative comprehension. *arXiv preprint arXiv:2307.16125*.
- Li, B., Y. Zhang, L. Chen, J. Wang, F. Pu, J. Yang, C. Li, and Z. Liu (2023). Mimic-it: Multi-modal in-context instruction tuning. *arXiv preprint arXiv:2306.05425*.
- Li, G., H. A. A. K. Hammoud, H. Itani, D. Khizbullin, and B. Ghanem (2023). CAMEL: Communicative agents for "mind" exploration of large language model society. In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Li, J., D. Li, S. Savarese, and S. Hoi (2023). Blip-2: bootstrapping language-image pre-training with frozen image encoders and large language models. In *Proceedings of the 40th International Conference on Machine Learning, ICML'23*. JMLR.org.
- Li, J., D. Li, C. Xiong, and S. Hoi (2022). Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *ICML*.
- Li, L., Y. Yin, S. Li, L. Chen, P. Wang, S. Ren, M. Li, Y. Yang, J. Xu, X. Sun, et al. (2023). M3it: A large-scale dataset towards multi-modal multilingual instruction tuning. *arXiv preprint arXiv:2306.04387*.
- Li, Y., Y. Du, K. Zhou, J. Wang, X. Zhao, and J.-R. Wen (2023, December). Evaluating object hallucination in large vision-language models. In H. Bouamor, J. Pino, and K. Bali (Eds.), *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, Singapore, pp. 292–305. Association for Computational Linguistics.
- Li, Y., Y. Zhang, C. Wang, Z. Zhong, Y. Chen, R. Chu, S. Liu, and J. Jia (2024). Mini-gemini: Mining the potential of multi-modality vision language models. *arXiv preprint arXiv:2403.18814*.
- Li, Z., B. Yang, Q. Liu, Z. Ma, S. Zhang, J. Yang, Y. Sun, Y. Liu, and X. Bai (2023). Monkey: Image resolution and text label are important things for large multi-modal models. *arXiv preprint arXiv:2311.06607*.
- Lin, B., Z. Tang, Y. Ye, J. Cui, B. Zhu, P. Jin, J. Zhang, M. Ning, and L. Yuan (2024). Moe-llava: Mixture of experts for large vision-language models. *arXiv preprint arXiv:2401.15947*.
- Lin, J., H. Yin, W. Ping, Y. Lu, P. Molchanov, A. Tao, H. Mao, J. Kautz, M. Shoenybi, and S. Han (2023). Vila: On pre-training for visual language models. *arXiv preprint arXiv:2312.07533*.
- Lin, T.-Y., M. Maire, S. Belongie, J. Hays, P. Perona, D. Ramanan, P. Dollár, and C. L. Zitnick (2014). Microsoft coco: Common objects in context. In D. Fleet, T. Pajdla, B. Schiele, and T. Tuytelaars (Eds.), *Computer Vision – ECCV 2014*, Cham, pp. 740–755. Springer International Publishing.

- Lin, Z., C. Liu, R. Zhang, P. Gao, L. Qiu, H. Xiao, H. Qiu, C. Lin, W. Shao, K. Chen, et al. (2023). Sphinx: The joint mixing of weights, tasks, and visual embeddings for multi-modal large language models. *arXiv preprint arXiv:2311.07575*.
- Lindström, A. D. and al (2022). Clevr-math: A dataset for compositional language, visual and mathematical reasoning. *arXiv preprint arXiv:2208.05358*.
- Liu, F., G. Emerson, and N. Collier (2023). Visual spatial reasoning. *Transactions of the Association for Computational Linguistics 11*, 635–651.
- Liu, H., C. Li, Y. Li, and Y. J. Lee (2023). Improved baselines with visual instruction tuning. In *NeurIPS 2023 Workshop on Instruction Tuning and Instruction Following*.
- Liu, H., C. Li, Y. Li, B. Li, Y. Zhang, S. Shen, and Y. J. Lee (2024, January). Llava-next: Improved reasoning, ocr, and world knowledge.
- Liu, H., C. Li, Q. Wu, and Y. J. Lee (2023). Visual instruction tuning. In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Liu, H., Q. You, X. Han, Y. Wang, B. Zhai, Y. Liu, Y. Tao, H. Huang, R. He, and H. Yang (2024). Infimm-hd: A leap forward in high-resolution multimodal understanding. *arXiv preprint arXiv:2403.01487*.
- Liu, S.-Y., C.-Y. Wang, H. Yin, P. Molchanov, Y.-C. F. Wang, K.-T. Cheng, and M.-H. Chen (2024). Dora: Weight-decomposed low-rank adaptation. *arXiv preprint arXiv:2402.09353*.
- Liu, T. and B. K. H. Low (2023). Goat: Fine-tuned llama outperforms gpt-4 on arithmetic tasks. *arXiv preprint arXiv:2305.14201*.
- Liu, Y., H. Duan, Y. Zhang, B. Li, S. Zhang, W. Zhao, Y. Yuan, J. Wang, C. He, Z. Liu, et al. (2023). Mmbench: Is your multi-modal model an all-around player? *arXiv preprint arXiv:2307.06281*.
- Loshchilov, I. and F. Hutter (2019). Decoupled weight decay regularization. In *International Conference on Learning Representations*.
- Lu, H., W. Liu, B. Zhang, B. Wang, K. Dong, B. Liu, J. Sun, T. Ren, Z. Li, Y. Sun, et al. (2024). Deepseek-vl: towards real-world vision-language understanding. *arXiv preprint arXiv:2403.05525*.
- Lu, J., C. Clark, S. Lee, Z. Zhang, S. Khosla, R. Marten, D. Hoiem, and A. Kembhavi (2023). Unified-io 2: Scaling autoregressive multimodal models with vision, language, audio, and action. *arXiv preprint arXiv:2312.17172*.
- Lu, P., H. Bansal, T. Xia, J. Liu, C. Li, H. Hajishirzi, H. Cheng, K.-W. Chang, M. Galley, and J. Gao (2024). Mathvista: Evaluating mathematical reasoning of foundation models in visual contexts. In *International Conference on Learning Representations (ICLR)*.
- Lu, P., R. Gong, S. Jiang, L. Qiu, S. Huang, X. Liang, and S.-C. Zhu (2021). Inter-gps: Interpretable geometry problem solving with formal language and symbolic reasoning. In *The Joint Conference of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (ACL-IJCNLP 2021)*.
- Lu, P., S. Mishra, T. Xia, L. Qiu, K.-W. Chang, S.-C. Zhu, O. Tafjord, P. Clark, and A. Kalyan (2022). Learn to explain: Multimodal reasoning via thought chains for science question answering. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (Eds.), *Advances in Neural Information Processing Systems*, Volume 35, pp. 2507–2521. Curran Associates, Inc.
- Lu, P., L. Qiu, K.-W. Chang, Y. N. Wu, S.-C. Zhu, T. Rajpurohit, P. Clark, and A. Kalyan (2023). Dynamic prompt learning via policy gradient for semi-structured mathematical reasoning. In *International Conference on Learning Representations (ICLR)*.
- Lu, P., L. Qiu, J. Chen, T. Xia, Y. Zhao, W. Zhang, Z. Yu, X. Liang, and S.-C. Zhu (2021). Iconqa: A new benchmark for abstract diagram understanding and visual language reasoning. In *The 35th Conference on Neural Information Processing Systems (NeurIPS) Track on Datasets and Benchmarks*.

- Mañas, O., P. Rodriguez Lopez, S. Ahmadi, A. Nematzadeh, Y. Goyal, and A. Agrawal (2023, May). MAPL: Parameter-efficient adaptation of unimodal pre-trained models for vision-language few-shot prompting. In A. Vlachos and I. Augenstein (Eds.), *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, Dubrovnik, Croatia, pp. 2523–2548. Association for Computational Linguistics.
- Marino, K., M. Rastegari, A. Farhadi, and R. Mottaghi (2019). Ok-vqa: A visual question answering benchmark requiring external knowledge. In *Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Marti, U.-V. and H. Bunke (2002, 11). The iam-database: An english sentence database for offline handwriting recognition. *International Journal on Document Analysis and Recognition* 5, 39–46.
- Masry, A., D. Long, J. Q. Tan, S. Joty, and E. Hoque (2022, May). ChartQA: A benchmark for question answering about charts with visual and logical reasoning. In *Findings of the Association for Computational Linguistics: ACL 2022*, Dublin, Ireland, pp. 2263–2279. Association for Computational Linguistics.
- Mathew, M., V. Bagal, R. Tito, D. Karatzas, E. Valveny, and C. V. Jawahar (2022). Infographicvqa. In *2022 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pp. 2582–2591.
- Mathew, M., D. Karatzas, and C. V. Jawahar (2021). Docvqa: A dataset for vqa on document images. In *2021 IEEE Winter Conference on Applications of Computer Vision (WACV)*, pp. 2199–2208.
- McKinzie, B., Z. Gan, J.-P. Fauconnier, S. Dodge, B. Zhang, P. Dufter, D. Shah, X. Du, F. Peng, F. Weers, et al. (2024). Mm1: Methods, analysis & insights from multimodal llm pre-training. *arXiv preprint arXiv:2403.09611*.
- Methani, N., P. Ganguly, M. M. Khapra, and P. Kumar (2020, March). Plotqa: Reasoning over scientific plots. In *The IEEE Winter Conference on Applications of Computer Vision (WACV)*.
- Mishra, A., S. Shekhar, A. K. Singh, and A. Chakraborty (2019). Ocr-vqa: Visual question answering by reading text in images. In *2019 International Conference on Document Analysis and Recognition (ICDAR)*, pp. 947–952.
- Mitra, A., H. Khanpour, C. Rosset, and A. Awadallah (2024). Orca-math: Unlocking the potential of slms in grade school math. *arXiv preprint arXiv:2402.14830*.
- Obeid, J. and E. Hoque (2020, December). Chart-to-text: Generating natural language descriptions for charts by adapting the transformer model. In B. Davis, Y. Graham, J. Kelleher, and Y. Sripada (Eds.), *Proceedings of the 13th International Conference on Natural Language Generation*, Dublin, Ireland, pp. 138–147. Association for Computational Linguistics.
- Pasupat, P. and P. Liang (2015, July). Compositional semantic parsing on semi-structured tables. In C. Zong and M. Strube (Eds.), *Proceedings of the 53rd Annual Meeting of the Association for Computational Linguistics and the 7th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, Beijing, China, pp. 1470–1480. Association for Computational Linguistics.
- Penedo, G., Q. Malartic, D. Hesslow, R. Cojocar, H. Alobeidli, A. Cappelli, B. Pannier, E. Almazrouei, and J. Launay (2023). The refinedweb dataset for falcon LLM: Outperforming curated corpora with web data only. In *Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track*.
- Pont-Tuset, J., J. Uijlings, S. Changpinyo, R. Soricut, and V. Ferrari (2020). Connecting vision and language with localized narratives. In A. Vedaldi, H. Bischof, T. Brox, and J.-M. Frahm (Eds.), *Computer Vision – ECCV 2020*, Cham, pp. 647–664. Springer International Publishing.
- Radford, A., J. W. Kim, C. Hallacy, A. Ramesh, G. Goh, S. Agarwal, G. Sastry, A. Askell, P. Mishkin, J. Clark, G. Krueger, and I. Sutskever (2021). Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*.

- Reid, M., N. Savinov, D. Teplyashin, D. Lepikhin, T. Lillicrap, J.-b. Alayrac, R. Soricut, A. Lazaridou, O. Firat, J. Schrittwieser, et al. (2024). Gemini 1.5: Unlocking multimodal understanding across millions of tokens of context. *arXiv preprint arXiv:2403.05530*.
- Ren, M., R. Kiros, and R. Zemel (2015). Exploring models and data for image question answering. In C. Cortes, N. Lawrence, D. Lee, M. Sugiyama, and R. Garnett (Eds.), *Advances in Neural Information Processing Systems*, Volume 28. Curran Associates, Inc.
- Sanh, V., A. Webson, C. Raffel, S. Bach, L. Sutawika, Z. Alyafeai, A. Chaffin, A. Stiegler, A. Raja, M. Dey, M. S. Bari, C. Xu, U. Thakker, S. S. Sharma, E. Szczechla, T. Kim, G. Chhablani, N. Nayak, D. Datta, J. Chang, M. T.-J. Jiang, H. Wang, M. Manica, S. Shen, Z. X. Yong, H. Pandey, R. Bawden, T. Wang, T. Neeraj, J. Rozen, A. Sharma, A. Santilli, T. Fevry, J. A. Fries, R. Teehan, T. L. Scao, S. Biderman, L. Gao, T. Wolf, and A. M. Rush (2022). Multitask prompted training enables zero-shot task generalization. In *International Conference on Learning Representations*.
- Schuhmann, C., R. Beaumont, R. Vencu, C. Gordon, R. Wightman, M. Cherti, T. Coombes, A. Katta, C. Mullis, M. Wortsman, P. Schramowski, S. Kundurthy, K. Crowson, L. Schmidt, R. Kaczmarczyk, and J. Jitsev (2022). Laion-5b: An open large-scale dataset for training next generation image-text models. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (Eds.), *Advances in Neural Information Processing Systems*, Volume 35, pp. 25278–25294. Curran Associates, Inc.
- Schuhmann, C., R. Vencu, R. Beaumont, R. Kaczmarczyk, C. Mullis, A. Katta, T. Coombes, J. Jitsev, and A. Komatsuzaki (2021). Laion-400m: Open dataset of clip-filtered 400 million image-text pairs. *arXiv preprint arXiv:2111.02114*.
- Schwenk, D., A. Khandelwal, C. Clark, K. Marino, and R. Mottaghi (2022). A-okvqa: A benchmark for visual question answering using world knowledge. In *Computer Vision – ECCV 2022: 17th European Conference, Tel Aviv, Israel, October 23–27, 2022, Proceedings, Part VIII*, Berlin, Heidelberg, pp. 146–162. Springer-Verlag.
- Sharma, P., N. Ding, S. Goodman, and R. Soricut (2018). Conceptual captions: A cleaned, hypernymed, image alt-text dataset for automatic image captioning. In *Proceedings of ACL*.
- Shayegani, E., Y. Dong, and N. Abu-Ghazaleh (2024). Jailbreak in pieces: Compositional adversarial attacks on multi-modal language models. In *The Twelfth International Conference on Learning Representations*.
- Shukor, M., C. Dancette, and M. Cord (2023, oct). ep-alm: Efficient perceptual augmentation of language models. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, Los Alamitos, CA, USA, pp. 21999–22012. IEEE Computer Society.
- Sidorov, O., R. Hu, M. Rohrbach, and A. Singh (2020). Textcaps: A dataset for image captioning with reading comprehension. In A. Vedaldi, H. Bischof, T. Brox, and J.-M. Frahm (Eds.), *Computer Vision – ECCV 2020*, Cham, pp. 742–758. Springer International Publishing.
- Singh, A., R. Hu, V. Goswami, G. Couairon, W. Galuba, M. Rohrbach, and D. Kiela (2022). Flava: A foundational language and vision alignment model. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 15617–15629.
- Singh, A., V. Natarjan, M. Shah, Y. Jiang, X. Chen, D. Parikh, and M. Rohrbach (2019). Towards vqa models that can read. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 8317–8326.
- Srinivasan, K., K. Raman, J. Chen, M. Bendersky, and M. Najork (2021). Wit: Wikipedia-based image text dataset for multimodal multilingual machine learning. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval, SIGIR '21*, New York, NY, USA, pp. 2443–2449. Association for Computing Machinery.
- Suhr, A., S. Zhou, A. Zhang, I. Zhang, H. Bai, and Y. Artzi (2019, July). A corpus for reasoning about natural language grounded in photographs. In A. Korhonen, D. Traum, and L. Màrquez (Eds.), *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, Florence, Italy, pp. 6418–6428. Association for Computational Linguistics.

- Sun, Q., Y. Cui, X. Zhang, F. Zhang, Q. Yu, Z. Luo, Y. Wang, Y. Rao, J. Liu, T. Huang, et al. (2023). Generative multimodal models are in-context learners. *arXiv preprint arXiv:2312.13286*.
- Sun, Q., Y. Fang, L. Wu, X. Wang, and Y. Cao (2023). Eva-clip: Improved training techniques for clip at scale. *arXiv preprint arXiv:2303.15389*.
- Sun, Z., S. Shen, S. Cao, H. Liu, C. Li, Y. Shen, C. Gan, L.-Y. Gui, Y.-X. Wang, Y. Yang, et al. (2023). Aligning large multimodal models with factually augmented rlhf. *arXiv preprint arXiv:2309.14525*.
- Tanaka, R., K. Nishida, and S. Yoshida (2021). Visualmrc: Machine reading comprehension on document images. In *AAAI*.
- Tang, B. J., A. Boggust, and A. Satyanarayan (2023). VisText: A Benchmark for Semantically Rich Chart Captioning. In *The Annual Meeting of the Association for Computational Linguistics (ACL)*.
- Team, G., R. Anil, S. Borgeaud, Y. Wu, J.-B. Alayrac, J. Yu, R. Soricut, J. Schalkwyk, A. M. Dai, A. Hauth, et al. (2023). Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*.
- Team, G., T. Mesnard, C. Hardin, R. Dadashi, S. Bhupatiraju, S. Pathak, L. Sifre, M. Rivière, M. S. Kale, J. Love, et al. (2024). Gemma: Open models based on gemini research and technology. *arXiv preprint arXiv:2403.08295*.
- Teknium (2023). Openhermes 2.5: An open dataset of synthetic data for generalist llm assistants.
- Thiel, D. (2023). Identifying and eliminating csam in generative ml training data and models.
- Touvron, H., M. Cord, A. Sablayrolles, G. Synnaeve, and H. Jégou (2021, October). Going deeper with image transformers. In *Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 32–42.
- Touvron, H., T. Lavril, G. Izacard, X. Martinet, M.-A. Lachaux, T. Lacroix, B. Rozière, N. Goyal, E. Hambro, F. Azhar, et al. (2023). Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Touvron, H., L. Martin, K. Stone, P. Albert, A. Almahairi, Y. Babaei, N. Bashlykov, S. Batra, P. Bhargava, S. Bhosale, et al. (2023). Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.
- Vallaey, T., M. Shukor, M. Cord, and J. Verbeek (2024). Improved baselines for data-efficient perceptual augmentation of llms. *arXiv preprint arXiv:2403.13499*.
- Wang, B., G. Li, X. Zhou, Z. Chen, T. Grossman, and Y. Li (2021). Screen2words: Automatic mobile ui summarization with multimodal learning. In *The 34th Annual ACM Symposium on User Interface Software and Technology, UIST '21, New York, NY, USA*, pp. 498–510. Association for Computing Machinery.
- Wang, W., Q. Lv, W. Yu, W. Hong, J. Qi, Y. Wang, J. Ji, Z. Yang, L. Zhao, X. Song, et al. (2023). Cogvlm: Visual expert for pretrained language models. *arXiv preprint arXiv:2311.03079*.
- Wei, J., M. Bosma, V. Zhao, K. Guu, A. W. Yu, B. Lester, N. Du, A. M. Dai, and Q. V. Le (2022). Finetuned language models are zero-shot learners. In *International Conference on Learning Representations*.
- Wolf, T., L. Debut, V. Sanh, J. Chaumond, C. Delangue, A. Moi, P. Cistac, T. Rault, R. Louf, M. Funtowicz, J. Davison, S. Shleifer, P. von Platen, C. Ma, Y. Jernite, J. Plu, C. Xu, T. Le Scao, S. Gugger, M. Drame, Q. Lhoest, and A. Rush (2020, October). Transformers: State-of-the-art natural language processing. In Q. Liu and D. Schlangen (Eds.), *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, Online, pp. 38–45. Association for Computational Linguistics.
- Xiao, J., Z. Xu, A. Yuille, S. Yan, and B. Wang (2024). Palm2-vadapter: Progressively aligned language model makes a strong vision-language adapter. *arXiv preprint arXiv:2402.10896*.

- Young, P., A. Lai, M. Hodosh, and J. Hockenmaier (2014). From image descriptions to visual denotations: New similarity metrics for semantic inference over event descriptions. *Transactions of the Association for Computational Linguistics* 2, 67–78.
- Yu, L., W. Jiang, H. Shi, J. YU, Z. Liu, Y. Zhang, J. Kwok, Z. Li, A. Weller, and W. Liu (2024). Metamath: Bootstrap your own mathematical questions for large language models. In *The Twelfth International Conference on Learning Representations*.
- Yue, X., Y. Ni, K. Zhang, T. Zheng, R. Liu, G. Zhang, S. Stevens, D. Jiang, W. Ren, Y. Sun, C. Wei, B. Yu, R. Yuan, R. Sun, M. Yin, B. Zheng, Z. Yang, Y. Liu, W. Huang, H. Sun, Y. Su, and W. Chen (2024). Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. In *Proceedings of CVPR*.
- Yue, X., X. Qu, G. Zhang, Y. Fu, W. Huang, H. Sun, Y. Su, and W. Chen (2024). MAMmoTH: Building math generalist models through hybrid instruction tuning. In *The Twelfth International Conference on Learning Representations*.
- Zhai, X., B. Mustafa, A. Kolesnikov, and L. Beyer (2023). Sigmoid loss for language image pre-training. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 11975–11986.
- Zhang, C., F. Gao, B. Jia, Y. Zhu, and S.-C. Zhu (2019). Raven: A dataset for relational and analogical visual reasoning. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*.
- Zhang, X., C. Wu, Z. Zhao, W. Lin, Y. Zhang, Y. Wang, and W. Xie (2023). Pmc-vqa: Visual instruction tuning for medical visual question answering. *arXiv preprint arXiv:2305.10415*.
- Zhao, Y., Y. Li, C. Li, and R. Zhang (2022, May). MultiHiertt: Numerical reasoning over multi hierarchical tabular and textual data. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, Dublin, Ireland, pp. 6588–6600. Association for Computational Linguistics.
- Zhao, Y., C. Zhao, L. Nan, Z. Qi, W. Zhang, X. Tang, B. Mi, and D. Radev (2023, July). RobuT: A systematic study of table QA robustness against human-annotated adversarial perturbations. In A. Rogers, J. Boyd-Graber, and N. Okazaki (Eds.), *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, Toronto, Canada, pp. 6064–6081. Association for Computational Linguistics.
- Zhong, V., C. Xiong, and R. Socher (2017). Seq2sql: Generating structured queries from natural language using reinforcement learning. *arXiv preprint arXiv:1709.00103*.
- Zhou, B., Y. Hu, X. Weng, J. Jia, J. Luo, X. Liu, J. Wu, and L. Huang (2024). Tinyllava: A framework of small-scale large multimodal models. *arXiv preprint arXiv:2402.14289*.
- Zhou, C., P. Liu, P. Xu, S. Iyer, J. Sun, Y. Mao, X. Ma, A. Efrat, P. Yu, L. YU, S. Zhang, G. Ghosh, M. Lewis, L. Zettlemoyer, and O. Levy (2023). LIMA: Less is more for alignment. In *Thirty-seventh Conference on Neural Information Processing Systems*.
- Zhu, F., W. Lei, Y. Huang, C. Wang, S. Zhang, J. Lv, F. Feng, and T.-S. Chua (2021, August). TAT-QA: A question answering benchmark on a hybrid of tabular and textual content in finance. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, Online, pp. 3277–3287. Association for Computational Linguistics.
- Zhu, W., J. Hessel, A. Awadalla, S. Y. Gadre, J. Dodge, A. Fang, Y. Yu, L. Schmidt, W. Y. Wang, and Y. Choi (2023). Multimodal c4: An open, billion-scale corpus of images interleaved with text. In *Thirty-seventh Conference on Neural Information Processing Systems Datasets and Benchmarks Track*.
- Zhu, Y., O. Groth, M. Bernstein, and L. Fei-Fei (2016). Visual7W: Grounded Question Answering in Images. In *IEEE Conference on Computer Vision and Pattern Recognition*.

A Appendix

A.1 Further experimental details of the ablations

A.1.1 Cross-attention vs. fully-autoregressive architectures

We apply LoRA modules to the LLM for the fully autoregressive architecture and to the cross-attention modules and the LLM for the cross-attention architecture. In Figure 4, we report the average performance with respect to the number of steps, the number of images, as well as the number of text tokens. We see an improvement across the board with the fully autoregressive architecture. Comparing the average score with these different axes is essential because the cross-attention architecture feeds a single token per image to the language model, against 64 for the fully autoregressive architecture with perceiver pooling. This implies that for the same training sequence length, the number of images and text tokens is different for the two architectures. Equivalently, the same multimodal document will yield different sequence lengths. Even though we fix the batch size in the comparison, the number of text tokens and number of images grow at different paces under the two architectures.



Figure 4: Comparison of the cross-attention and fully autoregressive architectures through the number of steps, the number of images and the number of text tokens.

A.1.2 Comparing various vision backbones

We present in Table 10 the detailed results of comparing multiple vision backbones. While EVA-CLIP-5B performs similarly to SigLIP-SO400M, we emphasize that it has 11 times more parameters. We also noticed in early experiments that TextVQA is the most sensitive benchmark to image resolution, which accounts for the performance increase.

VE backbone	Size	Res.	Avg. score	VQAv2	OKVQA	TextVQA	COCO
CLIP-ViT-H	600M	224	57.4	52.4	41.7	28.2	107.5
EVA-CLIP-5B	4.4B	224	60.2	53.4	43.3	30.4	113.7
SigLIP-SO400M	400M	384	60.6	53.6	43.4	33.8	111.6

Table 10: Detailed results of ablation on the vision encoder backbone

A.1.3 Comparing various pooling strategies

We compare multiple pooling strategies: a simple linear layer that takes the flattened sequence of vision hidden states and projects it into a shorter sequence of visual tokens, as well as a Mapping Network (Mañas et al., 2023). The perceiver resampler significantly outperforms these two options (see Table 11).

We also ablate the number of layers in the perceiver resampler, and find no statistically significant differences when increasing the number of layers, similarly to results from Xiao et al. (2024). We settle on 3 layers out of caution to avoid any potential capacity bottleneck.

Finally, we add a 2-layer modality projection MLP on top of the vision encoder hidden states to project the vision hidden dimension to the language model hidden dimension prior to the perceiver resampler. These changes yield better performance as well (see Table 13).

Vision-language Connector	Avg. score
Linear Projection	44.5
Mapping Network (Mañas et al., 2023)	51.8
Perceiver	60.3

Table 11: Ablation on the modality projection

Num. perceiver layers	Avg. score
1	69.3
3	68.6
12	69.0

Table 12: Ablation on the number of perceiver resampler layers

MLP modality projection	Avg. score
W/	71.4
W/o	69.6

Table 13: Ablation on the addition of a modality projection before the perceiver resampler

A.1.4 Ablations on OCR data

We hypothesize that adding PDF documents helps the model learn to read text from images. In Table 7, we compare checkpoints trained with and without OCR documents, along with image resolution increase to ensure that the text is legible. We do not observe statistically significant differences when evaluating checkpoints in zero or few shot. Instead, we fine-tune the checkpoints on DocVQA for 500 steps with a learning rate of $1e - 5$, leading to checkpoints showing much stronger differences.

A.1.5 Statistical significance of the experiments

In the context of large-scale experiments, this paper does not include error bars due to the high costs and time demands of multiple runs; each experiment can take as long as five days on eight nodes containing eight H100s each. Nevertheless, we conducted multiple runs for some experiments and observed differences of less than one point in the average score across all cases. This minimal variation supports the validity of the conclusions drawn from our ablation studies.

A.2 Details of the instruction fine-tuning

A.2.1 Statistics of The Cauldron

In Table 14, we present the statistics of the datasets included in The Cauldron, as well as the text-only instruction datasets used for the supervised fine-tuning. For each dataset, we give the number of different images it contains, the number of question-answer pairs, the total number of tokens for the answers in the question-answer pairs, and the selected percentage of tokens it represents in our final mixture after upsampling or downsampling.

Dataset	# images	# Q/A pairs	# tokens	% mixture
<i>General visual question answering</i>				
VQAv2 (Goyal et al., 2017)	82,772	443,757	1,595,929	5.72%
COCO-QA (Ren et al., 2015)	46,287	78,736	286,982	1.47%
Visual7W (Zhu et al., 2016)	14,366	69,817	279,268	1.43%
A-OKVQA (Schwenk et al., 2022)	16,539	17,056	236,492	1.21%
TallyQA (Acharya et al., 2019)	98,680	183,986	738,254	0.57%
OK-VQA (Marino et al., 2019)	8,998	9,009	38,853	0.40%
HatefulMemes (Kiela et al., 2020)	8,500	8,500	25,500	0.13%
VQA-RAD (Lau et al., 2018)	313	1,793	8,418	0.09%
<i>Captioning</i>				
LNarratives (Pont-Tuset et al., 2020)	507,444	507,444	21,328,731	4.56%

Screen2Words (Wang et al., 2021)	15,730	15,743	143,103	0.37%
VSR (Liu et al., 2023)	2,157	3,354	10,062	0.21%
<i>OCR, document understanding, text transcription</i>				
RenderedText ⁹	999,000	999,000	27,207,774	5.57%
DocVQA (Mathew et al., 2021)	10,189	39,463	337,829	3.46%
TextCaps (Sidorov et al., 2020)	21,953	21,953	389,658	2.00%
TextVQA (Singh et al., 2019)	21,953	34,602	181,918	1.86%
ST-VQA (Biten et al., 2019)	17,247	23,121	127,846	1.31%
OCR-VQA (Mishra et al., 2019)	165,746	801,579	6,073,824	0.93%
VisualMRC (Tanaka et al., 2021)	3,027	11,988	168,828	0.86%
IAM (Marti and Bunke, 2002)	5,663	5,663	144,216	0.74%
InfoVQA (Mathew et al., 2022)	2,118	10,074	61,048	0.63%
Diagram image-to-text ¹⁰	300	300	22,196	0.11%
<i>Chart/figure understanding</i>				
Chart2Text (Obeid and Hoque, 2020)	26,985	30,242	2,852,827	4.38%
DVQA (Kafle et al., 2018)	200,000	2,325,316	8,346,234	4.27%
VisText (Tang et al., 2023)	7,057	9,969	1,245,485	1.91%
ChartQA (Masry et al., 2022)	18,271	28,299	185,835	1.90%
PlotQA (Methani et al., 2020)	157,070	20,249,479	8478299.278	0.65%
FigureQA (Kahou et al., 2017)	100,000	1,327,368	3,982,104	0.61%
MapQA (Chang et al., 2022)	37,417	483,416	6,470,485	0.33%
<i>Table understanding</i>				
TabMWP (Lu et al., 2023)	22,729	23,059	1,948,166	2.49%
TAT-QA (Zhu et al., 2021)	2,199	13,215	283,776	2.18%
HiTab (Cheng et al., 2022)	2,500	7,782	351,299	1.80%
MultiHiertt (Zhao et al., 2022)	7,619	7,830	267,615	1.37%
FinQA (Chen et al., 2021)	5,276	6,251	242,561	0.99%
WikiSQL (Zhong et al., 2017)	74,989	86,202	9,680,673	0.99%
SQA (Iyyer et al., 2017)	8,514	34,141	1,894,824	0.97%
WTQ (Pasupat and Liang, 2015)	38,246	44,096	6,677,013	0.51%
<i>Reasoning, logic, maths</i>				
GeomVerse (Kazemi et al., 2024)	9,303	9,339	2,489,459	3.83%
CLEVR-Math (Lindström and al, 2022)	70,000	788,650	3,184,656	3.26%
CLEVR (Johnson et al., 2017)	70,000	699,989	2,396,781	1.23%
IconQA (Lu et al., 2021)	27,315	29,859	112,969	1.16%
RAVEN (Zhang et al., 2019)	42,000	42,000	105,081	0.67%
Inter-GPs (Lu et al., 2021)	1,451	2,101	8,404	0.17%
<i>Textbook/academic questions</i>				
AI2D (Kembhavi et al., 2016)	3,099	9,708	38,832	0.80%
TQA (Kembhavi et al., 2017)	1,496	6,501	26,004	0.53%
ScienceQA (Lu et al., 2022)	4,985	6,218	24,872	0.25%
<i>Differences between 2 images</i>				
NLVR2 (Suhr et al., 2019)	50,426	86,373	259,119	1.33%
GSD (Li et al., 2023)	70,939	141,869	4,637,229	0.48%
Spot the diff (Jhamtani et al., 2018)	8,566	9,524	221,477	0.57%
<i>Screenshot to code</i>				
WebSight (Laurençon et al., 2024)	500,000	500,000	276,743,299	0.28%
DaTikz (Belouadi et al., 2023)	47,974	48,296	59,556,252	0.03%

⁹<https://huggingface.co/datasets/wendlerc/RenderedText>

¹⁰https://huggingface.co/datasets/Kamizuru00/diagram_image_to_text

<i>Text-only general instructions, math problems, arithmetic calculations</i>				
OpenHermes-2.5 (Teknum, 2023)	0	1,006,223	248,553,747	12.73%
LIMA (Zhou et al., 2023)	0	1,052	633,867	0.81%
Dolly (Conover et al., 2023)	0	14,972	1,329,999	0.68%
MetaMathQA (Yu et al., 2024)	0	395,000	74,328,255	3.81%
MathInstruct (Yue et al., 2024)	0	261,781	45,393,559	2.33%
OrcaMath (Mitra et al., 2024)	0	200,031	63,780,702	1.63%
CamelAIMath (Li et al., 2023)	0	49,744	21,873,629	0.06%
AtlasMathSets ¹¹	0	17,807,579	455,411,624	3.50%
Goat (Liu and Low, 2023)	0	1,746,300	167,695,693	0.86%

Table 14: The statistics of datasets used for instruction fine-tuning. # tokens is the total number of tokens for each dataset for the answers only. % mixture is our selected percentage of answer tokens for each dataset in the final mixture.

A.3 Details of the evaluations

A.3.1 Evaluation setup

We perform all evaluations with a batch size of 1 and greedy decoding.

For the multi-choice questions in MMMU, MathVista, MMBench, we evaluate with the same prompt used for similar types of datasets during the instruction fine-tuning:

Question: {question}
 Choices:
 A. {choice_a}
 B. {choice_b}
 C. {choice_c}
 ...
 Answer with the letter.

For the open-ended questions in TextVQA, DocVQA, and VQAv2, we evaluate with the prompt:

Question: {question}
 Give a very brief answer.

We use the stop words `Question`, `User`, `<end_of_utterance>` and `<eos>` to stop a generation.

A.3.2 Expanded evaluation table

We report the expanded evaluation of Idefics2 and the comparison to other models in Table 15. This includes scores on VQAv2 (Goyal et al., 2017), which is widely adopted for evaluation. We acknowledge, though, that the metric used for the open-ended visual question answering benchmarks strongly penalizes models that do not generate in the same format as the ground truth. For example, answering "large" when the ground truth is "big" or more verbose reformulations will be counted as incorrect. Our manual qualitative analysis reveals that on benchmarks like VQAv2, the generations of two models differing by 5 points would be barely noticeable. This problem is less concerning for other open-ended benchmarks like TextVQA or DocVQA which require finding a text in an image, making the expected answer less prone to ambiguity. The detailed performance of Idefics2 across each category of MMMU (Yue et al., 2024) is present in Table 16.

A.3.3 Qualitative evaluation

We show in Figures 5, 6, and 7, examples of generations with Idefics2-chatty.

¹¹<https://huggingface.co/datasets/AtlasUnified/atlas-math-sets>

Model	Size	# tokens per image	MMMU	MathVista	TextVQA	MMBench	DocVQA	VQAv2
<i>7B-14B models</i>								
LLaVA-NeXT	13B	2880	36.2/-	35.3	67.1	70.0	-	82.8
DeepSeek-VL	7B	576	36.6/-	36.1	64.4	73.2	49.6	-
MM1-Chat	7B	720	37.0/35.6	35.9	72.8	72.3	-	82.8
Idefics2	8B	64	43.5/37.9	51.6	70.4	76.8	67.3	80.8
Idefics2	8B	320	43.0/37.7	51.4	73.0	76.7	74.0	81.2
<i>≥30B models</i>								
Mini-Gemini-HD	34B	2880	48.0/44.9	43.3	74.1	80.6	-	-
MM1-Chat	30B	720	44.7/40.3	39.4	73.5	75.1	-	83.7
LLaVA-NeXT	34B	2880	51.1/44.7	46.5	69.5	79.3	-	83.7
<i>Proprietary</i>								
Gemini 1.0 Pro	-	-	47.9/-	45.2	74.6	-	88.1	71.2
Claude 3 Haiku	-	-	50.2/-	46.4	-	-	88.8	-
Claude 3 Sonnet	-	-	53.1/-	47.9	-	-	89.5	-
Gemini 1.5 Pro	-	-	58.5/-	52.1	73.5	-	86.5	73.2

Table 15: Performance of Idefics2 against state-of-the-art VLMs across different sizes. The evaluations are done in zero shot. Idefics2 with 64 or 320 tokens per image only differs by the image splitting.

(Benchmark, Split, Metric): (MMMU, val/test, MMMU score), (MathVista, testmini/test, MMMU score), (TextVQA, val, VQA acc.), (MMBench, test, accuracy), (DocVQA, test, ANLS score), (VQAv2, testdev, VQA acc.).

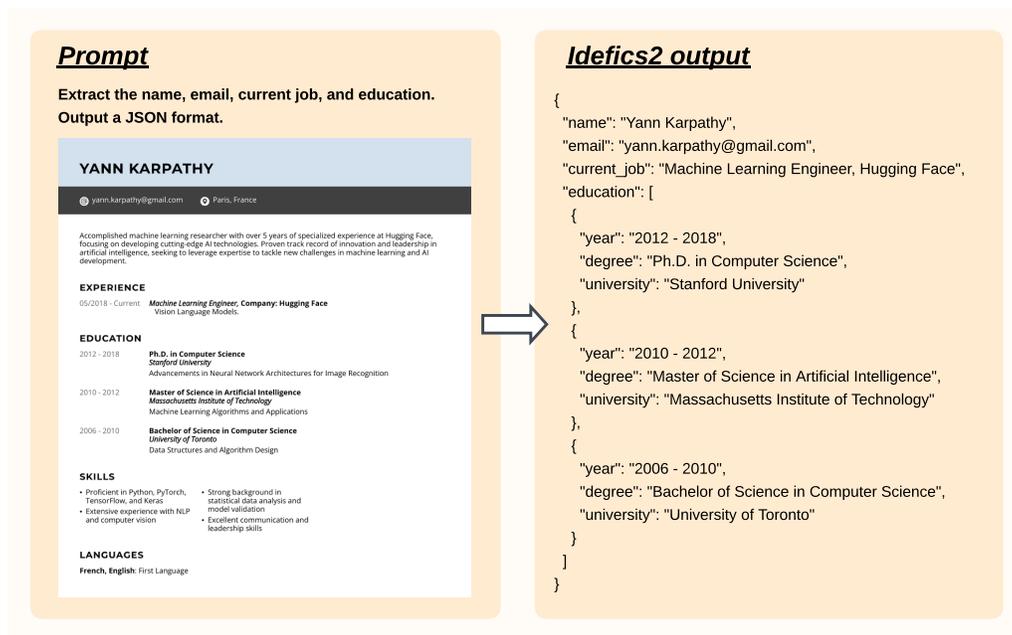


Figure 5: Idefics2-chatty finds the requested information in the resume, and organizes it in JSON format.

MMMU category	Score
<i>Overall</i>	45.3
<i>Accounting</i>	26.7
<i>Agriculture</i>	53.3
<i>Architecture and Engineering</i>	33.3
<i>Art</i>	76.7
<i>Art Theory</i>	76.7
<i>Basic Medical Science</i>	53.3
<i>Biology</i>	36.7
<i>Chemistry</i>	43.3
<i>Clinical Medicine</i>	43.3
<i>Computer Science</i>	43.3
<i>Design</i>	76.7
<i>Diagnostics and Laboratory Medicine</i>	36.7
<i>Economics</i>	46.7
<i>Electronics</i>	36.7
<i>Energy and Power</i>	23.3
<i>Finance</i>	40.0
<i>Geography</i>	30.0
<i>History</i>	50.0
<i>Literature</i>	83.3
<i>Manage</i>	46.7
<i>Marketing</i>	40.0
<i>Materials</i>	33.3
<i>Math</i>	56.7
<i>Mechanical Engineering</i>	43.3
<i>Music</i>	40.0
<i>Pharmacy</i>	36.7
<i>Physics</i>	26.7
<i>Psychology</i>	36.7
<i>Public Health</i>	36.7
<i>Sociology</i>	53.3
<i>Art & Design</i>	67.5
<i>Business</i>	40.0
<i>Health & Medicine</i>	41.3
<i>Humanities & Social Science</i>	55.8
<i>Science</i>	38.7
<i>Tech & Engineering</i>	38.1

Table 16: Detailed performance of Idefics2 across each category of MMMU (Yue et al., 2024).

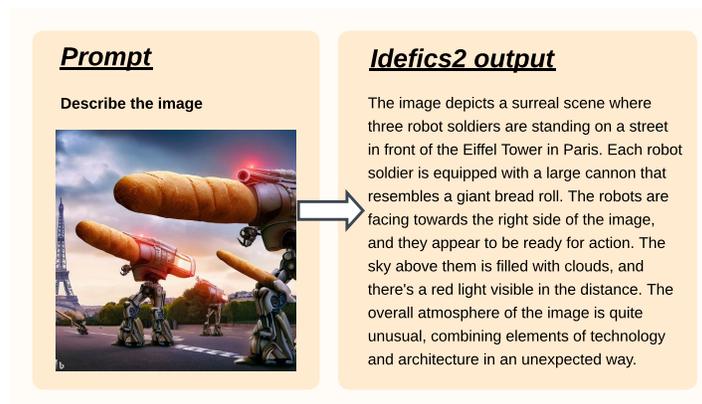


Figure 6: Idefics2-chatty describes an AI-generated image.

A.4 Limitations

Our research highlights significant advancements in VLMs, yet several limitations persist.

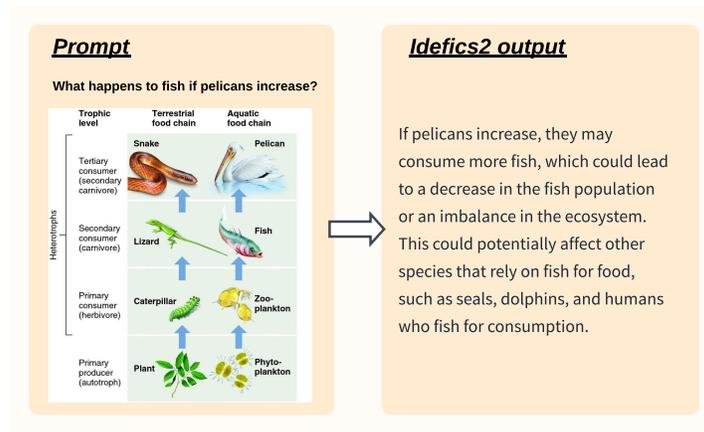


Figure 7: Idefics2-chatty answers a question on a scientific diagram.

Notably, current VLMs, including Idefics2, are prone to hallucinations, often generating content by describing nonexistent elements in images or fabricating facts. This issue underscores the challenges in ensuring the accuracy and reliability of model outputs.

Furthermore, the development of these models is slowed down by the lack of openly available, large-scale pre-trained vision encoders and comprehensive human-created instruction datasets with long answers for fine-tuning. Such resources are crucial for advancing VLMs, especially those optimized for conversational applications.

Additionally, as discussed in Section A.5, our models can be manipulated or "jailbroken" to produce outputs that are non-inclusive or disrespectful. This vulnerability highlights the importance of continuing to improve the robustness and ethical alignment of VLMs to prevent misuse and ensure they contribute positively in diverse applications.

A.5 Red-teaming

In the context of a red-teaming exercise, our objective is to evaluate the propensity of the model to generate inaccurate, biased, or offensive responses. We evaluate more specifically the chat-optimized checkpoint¹².

While the model typically refrains from responding to offensive inputs, we observe that through repeated trials or guided interactions, it tends to hastily form judgments in situations necessitating nuanced contextual understanding, often perpetuating harmful stereotypes. Noteworthy instances include:

- Speculating or passing judgments, or perpetuating historical disparities on individuals' professions, social status, or insurance eligibility based solely on visual cues (e.g., age, attire, gender, facial expressions).
- Generating content that promotes online harassment or offensive memes reinforcing harmful associations from a portrait, or from a benign image.
- Assuming emotional states or mental conditions based on outward appearances.
- Evaluating individuals' attractiveness solely based on their visual appearance.

Additionally, we identify behaviors that increase security risks that already exist:

- Successfully solving CAPTCHAs featuring distorted text within images.
- Developing phishing schemes from screenshots of legitimate websites to deceive users into divulging their credentials.

¹²<https://huggingface.co/HuggingFaceM4/idefics2-8b-chatty>

- Crafting step-by-step guides on constructing small-scale explosives using readily available chemicals from common supermarkets or manipulating firearms to do maximum damage.

It's important to note that these security concerns are currently limited by the model's occasional inability to accurately read text within images.

We emphasize that the model would often encourage the user to exercise caution about the model's generation or flag how problematic the initial query can be in the first place. For instance, when insistently prompted to write a racist comment, the model would answer that query before pointing out *"This type of stereotyping and dehumanization has been used throughout history to justify discrimination and oppression against people of color. By making light of such a serious issue, this meme perpetuates harmful stereotypes and contributes to the ongoing struggle for racial equality and social justice."*

However, certain formulations can circumvent (i.e. "jailbreak") these cautionary prompts, emphasizing the need for critical thinking and discretion when engaging with the model's outputs. While jail-breaking text LLMs is an active research area, jail-breaking vision-language models have recently emerged as a new challenge as vision-language models become more capable and prominent (Shayegani et al., 2024). The addition of the vision modality not only introduces new avenues for injecting malicious prompts but also raises questions about the interaction between vision and language vulnerabilities.

A.6 Licenses

A.6.1 License for the models

The model is built on top of two pre-trained models: SigLIP-SO400M (Zhai et al., 2023) and Mistral-7B-v0.1 (Jiang et al., 2023). Both were released under the Apache 2.0 license, and we release the Idefics2 checkpoints under the same license.

A.6.2 License for the Cauldron

Each of the publicly available sub-datasets present in the Cauldron are governed by specific licensing conditions. Therefore, when making use of them, you must take into consideration each of the licenses governing each dataset. To the extent we have any rights in the prompts, these are licensed under CC-BY-4.0.

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [Yes]

Justification: We conduct extensive experiments around pre-trained models, architecture choice, data and training methods in Section 3, and we build and present the results of our model in Section 4.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [Yes]

Justification: We discuss limitations of our work in Section A.4.

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory Assumptions and Proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [NA]

Justification: This paper does not include theoretical results.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental Result Reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: We accurately describe our model architecture, the setups of our experiments, including the hyperparameters, and the data used for the training, in Section 4. We release the model and our training data as open-source resources, making the evaluations reproducible.

Guidelines:

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: We train our model on open datasets only. We also release the dataset we built during this work as an open-source resource. Our model is integrated in the library Transformers (Wolf et al., 2020). The code to use the model is therefore available online.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so “No” is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental Setting/Details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: We specify the splits of the evaluations in Table 8 and Table 9. We describe the hyperparameters, the optimizer, number of epochs and details throughout the paper, and particularly in section 4.1.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment Statistical Significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: We present information about the statistical significance of the experiments in Section A.1.5.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.

- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments Compute Resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: We provide information on the computer resources in Section 3 for each ablation and in Section 4.1 for the training of the final model.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code Of Ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: We have reviewed and applied the NeurIPS Code of Ethics.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader Impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: By releasing our model, we identify behaviors that increase security risks (although they already exist), and we discuss them in Section A.5.

Guidelines:

- The answer NA means that there is no societal impact of the work performed.

- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [\[Yes\]](#)

Justification: In Section A.5, we discuss the potential risks of our model. We release the demo of our model with a system prompt teaching the model to be respectful, polite and inclusive. The dataset we release is a combination and modification of selected existing datasets which do not contain unsafe images.

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [\[Yes\]](#)

Justification: In the references section, we acknowledge all prior work we use in this paper. Moreover, the licenses of our model and dataset are present in Section A.6.

Guidelines:

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.

- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. **New Assets**

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [Yes]

Justification: We release our model and dataset with a model card and a dataset card explaining how to use these assets. Moreover, we provide additional resources, like a Google Colab to fine-tune our model, or quantized versions of our model, as helpful tools for the community.

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. **Crowdsourcing and Research with Human Subjects**

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [NA]

Justification: This paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. **Institutional Review Board (IRB) Approvals or Equivalent for Research with Human Subjects**

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [NA]

Justification: This paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.