
CAMILA: Context-Aware Masking for Image Editing with Language Alignment

Hyunseung Kim^{1,2*} Chiho Choi¹ Srikanth Malla¹ Sai Prahladh Padmanabhan¹
Saurabh Bagchi² Joon Hee Choi¹

¹Samsung Semiconductor, USA ²Purdue University

{kim4061, sbagchi}@purdue.edu

{chiho1.choi, srikanth.m, sai.prahladh, jh4.choi}@samsung.com

Abstract

Text-guided image editing has been allowing users to transform and synthesize images through natural language instructions, offering considerable flexibility. However, most existing image editing models naively attempt to follow all user instructions, even if those instructions are inherently infeasible or contradictory, often resulting in nonsensical output. To address these challenges, we propose a context-aware method for image editing named as CAMILA (Context-Aware Masking for Image Editing with Language Alignment). CAMILA is designed to validate the contextual coherence between instructions and the image, ensuring that only relevant edits are applied to the designated regions while ignoring non-executable instructions. For comprehensive evaluation of this new method, we constructed datasets for both single- and multi-instruction image editing, incorporating the presence of infeasible requests. Our method achieves better performance and higher semantic alignment than state-of-the-art models, demonstrating its effectiveness in handling complex instruction challenges while preserving image integrity.

1 Introduction

In recent years, the growing demand for visual content has made image editing essential across various fields. With advancements in technology, text-guided image editing has emerged as a powerful tool, enabling users to manipulate images using natural language instructions [4, 16, 10, 42, 11, 12]. This innovation has streamlined the editing process, enabling users to perform sophisticated edits. Among these advancements, diffusion-based models have particularly excelled in image generation [13, 38, 39, 30, 48, 45, 3] and editing tasks [18, 8, 12, 4, 42, 48]. However, models relying on simple text encoders such as CLIP [35] struggle to achieve user-intended fine-grained edits. These difficulties become more apparent when the editing prompt involves multi-step instructions with intricate details.

To address this limitation, recent research has introduced two notable improvements in model design. First, the CLIP-like text encoder has been replaced by Multimodal Large Language Models (MLLMs) [16, 10]. These models effectively parse user instructions and interpret textual prompts, improving the capabilities of natural language understanding. Second, regions requiring editing within the image are identified and modified using various methods, such as cross-attention maps and segmentation models, to align each edit prompt with its corresponding regions [11, 25]. Although the region-based image editing model [11] shows more effective results on multi-instruction tasks than other state-of-the-art methods, its attention maps often fail to consistently align with intended editing regions. This misalignment is especially pronounced when modifications involve spatial relationships or regions not directly associated with primary instruction keywords.

*Work done during an internship at Samsung Semiconductor, USA.

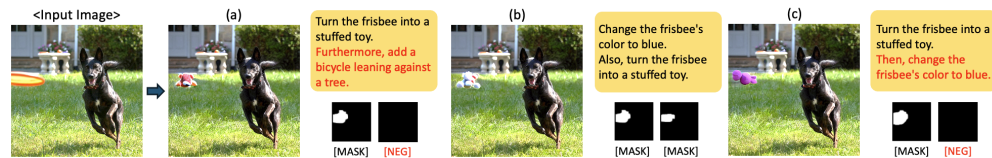


Figure 1: Three scenarios demonstrate how our method handles context-aware multi-instruction editing across various combinations of feasible and infeasible prompts. By leveraging [MASK] and [NEG] specialized tokens, it accurately identifies executable instructions.

These limitations become evident in multi-instruction scenarios containing challenging instructions that cannot be directly applied to the current image. Such instructions may request alterations to non-existent objects, logically inconsistent modifications, or edits that are incompatible with the image’s content. Parsing and interpreting such inputs makes editing systems impractical, introducing suboptimal edits or even unrealistic, incoherent images. Additionally, relying on pretrained Large Language Models [32] to parse or reorganize these instructions introduces further complexity in the editing pipeline and increases the potential for errors at intermediate steps. Any misinterpretation or bias in LLM output may propagate downstream, leading to incorrect region selection or over-editing.

Despite the growing research interest in comprehensive image editing, most existing methods overlook instruction executability, often leading to over-edited results. Our proposed approach addresses these concerns by explicitly assessing the executability of the instruction throughout the editing process. Building on pioneering research in this domain, we leverage the MLLM to jointly interpret both text instructions and images, then we extend its capabilities to enable image editing with context awareness. Here, *context* refers to the model’s ability to interpret the relevance of various instructions within a given image, allowing it to focus on applicable regions while ignoring irrelevant areas. A key feature of CAMILA is the use of specialized tokens and broadcast mechanism. Our model assigns [MASK] tokens to editable regions and [NEG] tokens to suppress irrelevant edits. The following broadcasting module then consistently aligns token assignments with user prompts. Overall, our context-aware pipeline helps to validate the coherence of instructions, resulting in improved performance across all image editing scenarios, including non-executable prompts.

To properly evaluate our approach, we extend the conventional single- and multi-instruction image editing tasks by introducing the possibility of non-executable prompts. This results in new evaluation scenarios: *Context-Aware Image Editing* that evaluate how the model handles the number of instructions and the presence of infeasible requests within the same sequence. We compare our method against several state-of-the-art baselines, observing substantial improvements in editing accuracy, particularly L1 and L2 distances, as well as enhanced performance on CLIP and DINO scores, with a human preference-based evaluation also indicating strong performance.

Our main contributions to this work are as follows:

- We introduce a context-aware image editing model that precisely identifies prompt executability and corresponding editing regions, allowing user-aligned and consistent modifications.
- We propose a new task setting: *Context-Aware Image Editing*. New datasets are created to evaluate model behavior and context-awareness in challenging scenarios.
- Our model demonstrates significant improvements over existing methods in varying evaluation scenarios, achieving lower pixel-level errors and higher semantic alignment, while also showing qualitative superiority in effectively handling complex instructions.

Note that we formally define ‘non-executable instruction’ as any request that cannot be executed given the visual constraints or inherent semantics of the image. Our source code is available at <https://github.com/hk-repo/CAMILA>.

2 Related Works

Multimodal Large Language Models. Multimodal Large Language Models (MLLMs) [24, 27, 9, 41, 51, 26] integrate multiple modalities, such as images and text. Recent MLLMs have advanced to handle complex tasks such as referring visual grounding [50, 23, 7, 43], which aims to distinguish specific objects based on context. Additionally, MLLMs have been applied to image editing task [16,

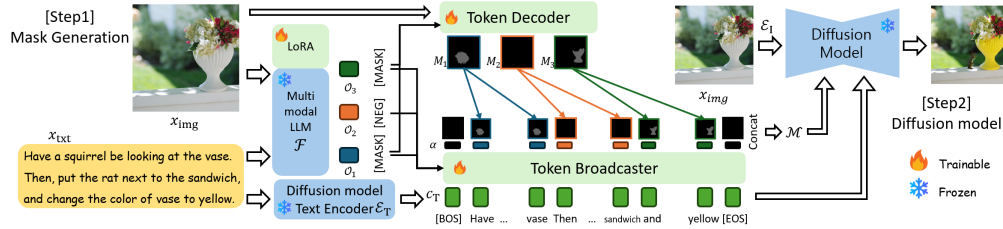


Figure 2: The architecture of CAMILA begins by jointly processing the image x_{img} and text instructions x_{txt} using an MLLM. Output tokens are classified as either [MASK] or [NEG], indicating regions to modify or leave unchanged. These tokens are aligned with the text embeddings using the Token Broadcaster, and the final binary mask is generated by the Token Decoder. The mask is then applied in a diffusion model to produce the edited image.

10]. For instance, SmartEdit [16] improves instruction comprehension with bidirectional interactions between image and text, while MGIE [10] jointly trains an MLLM and diffusion model to guide editing tasks with visual-aware instructions. However, these models often lack context-awareness and fail to distinguish between relevant and irrelevant prompts. We thus break new ground by being the first to incorporate a context-aware MLLM specially for image editing. Unlike prior research, we do not limit our scope to single instruction tasks, enabling our model to handle both multi and context-aware instructions.

Image Editing by Diffusion Model. Diffusion models have become prominent in image editing [37, 1, 30, 29, 18, 8, 12, 42, 48, 49]. While text-guided image editing enable basic modifications, instruction-based image editing offers more nuanced control by interpreting complex, user-directed commands via natural language. InstructPix2Pix [4] introduced a dataset combining GPT-3-generated texts [5] and Prompt2Prompt-based images [12], which powers natural language-guided editing. MGIE [10] utilizes an MLLM with visual-aware instructions for editing, and FoI [11] uses cross-attention maps for multi-instruction scenarios. However, these methods struggle with ambiguous or incorrect instructions, as they lack mechanisms to interpret prompt feasibility. This limitation often leads to unintended modifications when the model encounters unclear instructions.

3 Preliminary

We briefly introduce InstructPix2Pix (IP2P) [4], a standard framework for instruction-guided image editing and its cross-attention mechanism. This overview serves as the background for our work.

3.1 InstructPix2Pix

IP2P [4] is built upon Stable Diffusion [38] to modify images based on textual instructions. In this framework, conditioning on both input image and text instructions is necessary for guiding diffusion network to produce editing results aligned with user instruction. The input image x_{img} is first encoded into a latent vector z by the encoder $\mathcal{E}_I$. At each time step t , the noisy latent vector z_t is progressively denoised by the score network. Then, the denoised latent vector z is decoded into the output image.

To achieve conditional generation, diffusion models often employ classifier-free guidance [14], which eliminates the need for an external classifier. In their score network, two conditioning factors are introduced for use during inference: the image conditioning c_I and the text instruction conditioning c_T . c_I and c_T are the encoded outputs from the image encoder $\mathcal{E}_I$ and the text encoder $\mathcal{E}_T$, respectively. The final score estimation $\tilde{e}_\theta(z_t, c_I, c_T)$ is computed as follows:

$$\begin{aligned} \tilde{e}_\theta(z_t, c_I, c_T) = & e_\theta(z_t, \emptyset, \emptyset) + s_I \cdot (e_\theta(z_t, c_I, \emptyset) - e_\theta(z_t, \emptyset, \emptyset)) \\ & + s_T \cdot (e_\theta(z_t, c_I, c_T) - e_\theta(z_t, c_I, \emptyset)). \end{aligned} \quad (1)$$

In this equation, $e_\theta(z_t, \emptyset, \emptyset)$ represents the base score prediction without any conditioning applied. The second term modulates the score with image conditioning c_I , where s_I modulates how much the model preserves the characteristics of the input image. Similarly, the last term incorporates text conditioning c_T , with s_T controls the degree of adherence to the edit instruction provided.

3.2 Cross Attention in Stable Diffusion

IP2P employs cross-attention network modulation within the denoising U-Net architecture of the Stable Diffusion network. A key component is the cross-attention layer, which generates attention maps $\mathcal{A} \in \mathbb{R}^{r \times r \times m}$, where r is the spatial size and m is the number of text tokens. Several studies [2, 6, 11] have shown that cross-attention maps with $r = 16$ capture the most significant semantic information, compared to maps at other spatial resolutions. Thus, by modulating the computation of these cross-attention layers, it is possible to alter the image, as adjustments in the attention maps guide the model's focus on specific aspects of the text and image content [8, 44].

4 Methods

We build our framework upon a pretrained MLLM [27] and diffusion model [38], but our key contribution lies in explicitly assessing the executability of instructions and leveraging specialized tokens to guide editing process in diffusion model. A key feature of our approach is its ability to validate the contextual coherence between instructions and the image, ensuring that only relevant edits are applied to designated regions while ignoring non-executable instructions. This context-aware mechanism distinguishes our method from existing MLLM-based approaches [10, 16], establishing executability filtering and context-awareness as new modeling objectives for MLLM-based image editing.

4.1 Architecture

The architecture of CAMILA is shown in Figure 2. Given an image x_{img} and text instructions x_{txt} , both inputs are jointly processed by the MLLM $\mathcal{F}$. The model is designed to encode and combine the visual and textual inputs, enabling it to capture the relationships between the textual instructions and corresponding regions in the image. Specifically, the image is processed through a vision encoder, while the text instructions are tokenized and processed by a language encoder. These representations are then combined into a unified sequence within the MLLM architecture, which interprets the joint context of the image and instructions. The output sequence $\mathcal{O}$ is generated from the image input x_{img} and text input x_{txt} . Each output token $\mathcal{O}_i$ in $\mathcal{O} = \{\mathcal{O}_1, \mathcal{O}_2, \dots, \mathcal{O}_n\}$, where n denotes the number of generated tokens, is classified as either a [MASK] or [NEG] token. The [MASK] tokens correspond to regions of the image that are to be modified based on the text instructions, while the [NEG] tokens indicate areas of the image that should remain unaffected.

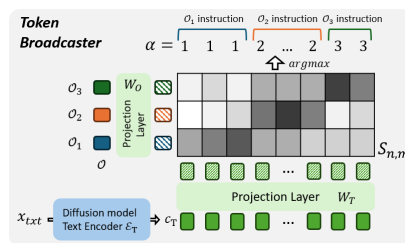


Figure 3: Architecture of the Token Broadcaster. It calculates similarity between MLLM output tokens and encoded text features, assigning each output token to the text embedding that best matches its corresponding semantic region.

By combining the visual and textual inputs, the MLLM is able to determine the relevance of each instruction to specific regions in the image, ensuring that only applicable edits are applied. This joint processing aligns each generated output token, either [MASK] or [NEG], with specific instructions. The [MASK] tokens are decoded, resulting in masks that accurately highlight the regions in the image that require modification according to the instructions. This targeted approach improves the precision of the editing process by ensuring that modifications are applied solely to relevant areas. The following content will elaborate on how [MASK] and [NEG] tokens are aligned with instructions by Token Broadcaster and how [MASK] tokens are decoded into the actual editing mask by Token Decoder.

4.2 Token Broadcaster and Token Decoder

Token Broadcaster. The output sequence $\mathcal{O}$ generated by the MLLM is processed by the Token Broadcaster module to ensure that the [MASK] and [NEG] tokens align accurately with the corresponding text embeddings. As illustrated in Figure 3, the text instructions x_{txt} are embedded through the text encoder $\mathcal{E}_T$ of the diffusion model, resulting in a set of text embeddings c_T . Using the diffusion model's text encoder $\mathcal{E}_T$ allows the model to ensure that the generated editing masks will align precisely with c_T , facilitating integration into the diffusion model.

The MLLM output tokens $\mathcal{O}$ and the text embeddings c_T reside in different latent spaces, so we need to align them into a single space. Many studies [20, 46] use cosine similarity-based alignment to measure and organize relationships or similarities between different modalities. We project them into a shared space for alignment by applying trainable transformations W_O and W_T to each, directly within the similarity matrix:

$$S_{i,j} = \frac{(\mathcal{O}_i W_O) \cdot (c_{Tj} W_T)}{\|(\mathcal{O}_i W_O)\| \| (c_{Tj} W_T) \|}, \quad (2)$$

where each element $S_{i,j}$ represents the cosine similarity score between the i -th transformed output token ($\mathcal{O}_i W_O$) and the j -th transformed text embedding ($c_{Tj} W_T$), indicating their compatibility in the shared latent space.

To convert similarity scores into alignment probabilities, a softmax is applied along each column of S . For each text embedding j , we then determine the index α_j that maximizes this probability:

$$\alpha_j = \arg \max_i \left(\frac{\exp(S_{i,j})}{\sum_k \exp(S_{k,j})} \right), \forall j \in \{1, 2, \dots, m\}, \quad (3)$$

where m denotes the length of text embeddings. This alignment process ensures that each text embedding maps to the output token best reflecting its semantic region within the image.

Token Decoder. The Token Decoder processes tokens differently based on their type: only tokens labeled as [MASK] are converted into editing masks, while [NEG] tokens are directly replaced with black masks, indicating regions where no modification is applied. Designed as a two-layer Transformer decoder, the Token Decoder generates a set of binary masks $M_1, M_2, \dots, M_n$, each specifying regions of the image to be edited according to the text instructions.

In the first decoder layer, we employ a cross-attention mechanism between image and text embeddings. This allows the model to extract contextually relevant features from the image that are aligned with the text instructions. By attending to both modalities, the decoder effectively maps the semantic content of the text to corresponding regions in the image. The second decoder layer further refines this information by incorporating the [MASK] tokens into the key and value projections of the attention mechanism. This enables the model to focus more precisely on the regions identified by each [MASK] token. After the second decoder layer, these intermediate masks are passed through sigmoid thresholding to produce the final 0-1 binary masks, denoted as M_i . Through this process, Token Decoder is able to generate the final binary mask M_i , with each mask serving as an editing mask for the corresponding MLLM output tokens $\mathcal{O}_i$, defining the specific areas of the image to be modified.

4.3 Diffusion Model

For each text embedding j , the alignment index α_j determines the specific binary mask M_{α_j} to be used. The individual masks are concatenated to form a unified binary mask $\mathcal{M}$, which is then used in the diffusion model to guide the editing process:

$$\mathcal{M} = \text{concat}(M_{\alpha_1}, M_{\alpha_2}, \dots, M_{\alpha_m}). \quad (4)$$

This binary mask $\mathcal{M}$ ensures that each region is modified according to alignment indices from the Token Broadcaster, enabling precise, context-aware edits that reflect the intended modifications.

We modulate the cross-attention layers of the diffusion model, focusing specifically on the 16-sized cross-attention map, which captures the most semantically relevant features, as explained in Section 3.2. The U-Net's cross-attention map $\mathcal{A}$ is modulated using the following equation:

$$\mathcal{A}' = \text{softmax} \left(\frac{\mathcal{X} \odot \mathcal{M} + \mathcal{Y} \odot (1 - \mathcal{M})}{\sqrt{d}} \right), \quad (5)$$

where d is the latent projection dimension, $\mathcal{X} = Q_{I,T} K_{I,T}^T$, and $\mathcal{Y} = Q_{I,\emptyset} K_{I,\emptyset}^T$. In this formulation, $Q_{I,T}$ and $K_{I,T}$ represent the query and key projections in $e_\theta(z_t, c_I, c_T)$, respectively, while $Q_{I,\emptyset}$ and $K_{I,\emptyset}$ are the query and key projections in $e_\theta(z_t, c_I, \emptyset)$.

This modulation approach leverages $\mathcal{A}$ to align each text embedding precisely with the regions specified by the concatenated binary mask $\mathcal{M}$, enhancing editing accuracy by concentrating on the relevant areas as dictated by the instructions. Then, the binary mask $\mathcal{M}$ selectively applies the text-conditioned attention map $\mathcal{X}$ to editable regions and $\mathcal{Y}$ to unaltered areas, ensuring that only the specified areas are modified. By modulating the attention layer as in Equation (5), we generate the final output image following the score estimation formulated in Equation (1).

4.4 Training Details

Training Loss Function. The training of our MLLM-based approach is optimized with four primary loss components, each designed to target a specific aspect of model performance for accurate token classification, alignment, and mask generation. The total loss $\mathcal{L}_{\text{main}}$ is formulated as follows:

$$\mathcal{L}_{\text{main}} = \lambda_1 \mathcal{L}_{\text{CE}}^{\text{token}} + \lambda_2 \mathcal{L}_{\text{CE}}^{\text{broadcast}} + \lambda_3 \mathcal{L}_{\text{dice}} + \lambda_4 \mathcal{L}_{\text{BCE}}, \quad (6)$$

where $\lambda_1, \lambda_2, \lambda_3, \lambda_4$ are hyperparameters that balance the influence of each loss component.

The first element, token classification loss $\mathcal{L}_{\text{CE}}^{\text{token}}$, applies cross-entropy (CE) loss to the MLLM output tokens. The second element, broadcasting alignment loss $\mathcal{L}_{\text{CE}}^{\text{broadcast}}$, also utilizes CE loss to align MLLM output tokens with their respective text embeddings, ensuring precise correspondence between instructions and image regions. For mask quality, the mask dice loss $\mathcal{L}_{\text{dice}}$ measures overlap between predicted and ground truth masks, encouraging accurate spatial targeting. Lastly, the binary cross-entropy loss $\mathcal{L}_{\text{BCE}}$ enforces accuracy at the pixel level in the generated mask.

Trainable Parameters. To efficiently fine-tune the pre-trained MLLM while preserving its learned knowledge, we adopt the Low-Rank Adaptation technique [15]. In our training, we freeze the vision backbone and text encoder of the MLLM, while the remaining parts of the model are fine-tuned. Additionally, the Token Broadcaster and Token Decoder are also trained, ensuring that the model aligns the output tokens with the text instructions and generates accurate masks for the diffusion model. Training is more efficient since only the MLLM and lightweight modules are updated, unlike other methods that jointly fine-tune both MLLM and diffusion model. All other training details are provided in Section A.

4.5 Surrogate Module Training for Enhanced Masking

To further improve the quality of the binary mask $\mathcal{M}$ provided to the diffusion model, we conduct additional training beyond the initial MLLM training. Through empirical analysis, we found that certain outputs misalign with the description of the goal image. To better align the generated image with the intended modifications, we consider it useful to focus on improving CLIP-T score, which measures the similarity between the global description and the generated image. By optimizing the model for a higher CLIP-T score, we aim to generate higher quality binary masks, which lead to improved quality in the final output image.

However, due to the inherent complexity and the large number of steps involved in the forward pass of the diffusion model, directly backpropagating the loss from the final output image through the diffusion model to the MLLM is infeasible. To address this limitation, we develop a lightweight surrogate module that approximates the CLIP-T score based on the input image x_{img} , the edit instruction x_{txt} , and the binary masks $\mathcal{M}$. Designed as a single-layer transformer, the surrogate module offers a streamlined alternative to the complex, multi-step diffusion model. It is trained using a mean squared error (MSE) loss between the actual CLIP-T score and the predicted CLIP-T score. During this training phase, all other parts of the model are kept frozen, and only the surrogate module is updated. The overall loss function for training the surrogate module is formulated as:

$$\mathcal{L}_{\text{surrogate}} = \mathbb{E} \left[(\text{CLIP-T}_{\text{output}} - \text{CLIP-T}_{\text{surrogate}})^2 \right], \quad (7)$$

where $\text{CLIP-T}_{\text{output}}$ and $\text{CLIP-T}_{\text{surrogate}}$ denote the actual CLIP-T score of the target output and the predicted score, respectively. This approach ensures that the surrogate module learns to accurately estimate the CLIP-T score without requiring multi-step backpropagation of the diffusion model.

Refining Mask Generation via Surrogate Module. Once the surrogate module is fully trained, we use estimated values to fine-tune the MLLM, Token Broadcaster, and Token Decoder. In this stage, the surrogate module is kept frozen, and the focus is on improving mask generation to maximize the predicted CLIP-T score. The objective is to modify the MLLM's outputs to generate binary masks with a higher CLIP-T score when processed by the diffusion model.

During training, the loss function is augmented to include both $\mathcal{L}_{\text{main}}$ as well as the MSE loss between the predicted CLIP-T score and the oracle CLIP-T score. The updated loss $\mathcal{L}_{\text{updated}}$ is defined as:

$$\mathcal{L}_{\text{updated}} = \mathcal{L}_{\text{main}} + \lambda_5 \mathcal{L}_{\text{MSE}}, \quad (8)$$

where $\mathcal{L}_{\text{MSE}}$ is the MSE loss between the predicted and oracle CLIP-T score, and λ_5 is a hyperparameter controlling the weight of the CLIP-T score loss.

Table 1: **Quantitative comparison across multi-instruction and context-aware instruction tasks.** Our model demonstrates overall superior performance, especially excelling in the context-aware instruction task. This highlights our method’s superb capability to handle context-aware instructions with high precision, applying edits that closely align with the intended modifications without over-editing. **Bold** and underlining indicates the best and the second-best performance for each metric.

Method	Multi Instruction					Context-Aware Instruction				
	L1↓	L2↓	CLIP-I↑	DINO↑	CLIP-T↑	L1↓	L2↓	CLIP-I↑	DINO↑	CLIP-T↑
IP2P [4]	0.1402	0.0526	0.8327	0.7122	<u>0.2977</u>	0.1460	0.0514	0.7975	0.6429	0.2715
MGIE [10]	0.1639	0.0777	0.8205	0.6723	0.2787	0.1592	0.0750	0.8090	0.6519	0.2637
SmartEdit [16]	0.1295	0.0573	0.8630	0.7516	0.2971	0.1111	0.0495	0.8739	0.7726	0.2824
FoI [11]	<u>0.1054</u>	<u>0.0385</u>	<u>0.8811</u>	<u>0.8096</u>	0.2941	<u>0.0891</u>	<u>0.0284</u>	<u>0.8895</u>	<u>0.8190</u>	<u>0.2888</u>
CAMILA (ours)	0.0945	0.0366	0.8980	0.8392	0.2984	0.0661	0.0222	0.9296	0.8932	0.3006

5 Evaluation

5.1 Task Categorization

For a comprehensive assessment, we evaluate our method on both single-instruction tasks aligned with standard benchmarks, and multi-instruction image editing tasks that require multiple edit turns in a single sequence. In a single-instruction scenario, a single directive is tested either in a single-turn or multi-turn setting, whereas multi-instruction tasks involve multiple directives that must be applied simultaneously. We further divide multi-instruction tasks into two types: *Multi-instruction Image Editing*, which includes only applicable instructions, and *Context-Aware Instruction Image Editing*, which includes a mix of applicable and non-applicable instructions.

5.2 Evaluation Settings

Datasets: For evaluating single instruction tasks, we use the MagicBrush [47] dataset, which covers both single-turn and multi-turn scenarios as detailed in Section 6, along with the EMU [40] dataset. However, the literature lacks dedicated benchmark datasets for multi-instruction or context-aware instruction editing. To address this gap, we introduce two new tasks and curate corresponding datasets: *Multi-instruction Image Editing* and *Context-Aware Instruction Image Editing* as detailed in Section 5.3. In Multi-instruction Image Editing, we concatenate applicable instructions from MagicBrush’s multi-turn dataset into a single instruction sequence. In the Context-Aware Instruction Image Editing task, we introduce non-applicable instructions generated with ChatGPT-4V(ision) [32] alongside images. More details on data creation are detailed in Section C.

Metrics: To evaluate our proposed method, we employ a diverse set of metrics, including L1/L2, CLIP-I, DINO, CLIP-T, CLIP-dir, and PickScore [22]. Detailed descriptions of these metrics are provided in Section B.

Baselines: We compare CAMILA with five different state-of-the-art image editing methods: IP2P [4], EMILIE [17], MGIE [10], SmartEdit (SE) [16], and FoI [11].

5.3 Main Results

Quantitative Result. As illustrated in Table 1, CAMILA demonstrates state-of-the-art results across both multi-instruction and context-aware instruction tasks, particularly excelling in metrics such as CLIP-I, CLIP-T, and DINO similarity, and overall distance metrics (L1 and L2). This indicates that our model aligns closely with human perception in maintaining fidelity to edited images.

The existing methods exhibit notable limitations. MGIE, which relies on a summarization approach to compress instructions, proves to be vulnerable to non-applicable instructions, leading to potential inaccuracies in execution. While SmartEdit shows improved understanding due to the integration of MLLMs, it suffers from a lack of robustness by feeding all instructions into the diffusion model simultaneously, which can lead to oversights in handling complex editing requests. Additionally, FoI struggles with imprecise attention maps, which reduces its performance below CAMILA though it is the most competitive baseline. In stark contrast, our approach effectively manages multi-instruction editing tasks, demonstrating superior capability in processing context-aware instructions.



Figure 4: **Qualitative comparisons:** FoI needs to extract keywords from each instruction using pretrained GPT model before running the model. Furthermore, due to inaccuracies in the attention map of diffusion model, FoI often fails to make precise modifications. In the case of context-aware instructions, CAMILA accurately identifies applicable instructions by generating [MASK] and [NEG] tokens from MLLM. We present the decoded mask results for each instruction of the [MASK] token.

This proficiency enables our model to execute edits with high precision, aligning closely with the intended modifications while minimizing the risk of over-editing. Overall, our results underscore the advantages of our method in navigating the complexities inherent to multi-instruction tasks.

In addition to distance-based metrics and similarity-based metrics, we further evaluate human perceptual alignment using the PickScore metric across two editing tasks: Multi-instruction and Context-Aware image editing. CAMILA outperforms the strongest baseline, FoI, by 18.1% and 24.0% in each setting, respectively. The advantage is more evident in the Context-Aware setting, demonstrating our model's ability to effectively filter non-applicable instructions. More detailed results are presented in Section E.1.

Qualitative Result. As shown in Figure 4, we present qualitative results and observe the following: All models, except for FoI, frequently execute only a single instruction when multiple instructions are provided. In (a), while FoI successfully performs the first instruction, it fails to generate an accurate attention map for the keyword 'river', resulting in the incomplete application of the second instruction. Similarly, in (b), the lack of a fine-grained attention map results in the hat being placed incorrectly. The remaining models predominantly execute only one instruction and demonstrate a tendency toward over-editing; for instance, IP2P and MGIE alter the background color in (a), and SmartEdit generates an additional unicorn.

In (c) and (d), most models exhibit erroneous edits in response to non-applicable instructions. In (c), despite the absence of a chair or table in the input image, the models add incorrect floral elements or a table. Similarly, in (d), although the input image does not contain a pancake, it erroneously appears due to the removal instruction, illustrating an inability to correctly handle the instruction. Especially compared to FoI, our model demonstrates greater precision in mask extraction for areas requiring modification, enabling more refined edits. Furthermore, CAMILA supports both localized object edits and global transformations. The [MASK] tokens dynamically adjust their spatial coverage based on each instruction, enabling edits that range from small regions to full-scene editings. Through the use of [MASK] and [NEG] tokens, our proposed model facilitates robust, context-aware image editing. Further qualitative results are provided in Section E.4.

Table 2: **Quantitative comparison on EMU dataset.** Achieving the highest CLIP-dir score in the Context-Aware task shows that our model effectively distinguishes non-executable instructions.

Task Method	Single-inst		Context-Aware	
	CLIP-T $\uparrow$	CLIP-dir $\uparrow$	CLIP-T $\uparrow$	CLIP-dir $\uparrow$
IP2P	0.2616	0.075	0.2446	0.064
MGIE	0.2680	0.082	0.2543	0.066
SE	<u>0.2680</u>	0.094	0.2448	<u>0.067</u>
FoI	0.2673	0.068	<u>0.2651</u>	0.054
ours	0.2687	<u>0.092</u>	0.2679	0.092

Table 3: **Comparison of results before and after additional training with the surrogate module.** We apply the surrogate module to improve the CLIP-T score, which also enhances L1/L2 losses, as well as CLIP-I and DINO scores.

Task		Config	L1 $\downarrow$	L2 $\downarrow$	CLIP-I $\uparrow$	DINO $\uparrow$	CLIP-T $\uparrow$
Single Inst.	Single	before	0.0602	0.0194	0.9367	0.9067	0.3020
		after	0.0596	0.0191	0.9375	0.9069	0.3022
	Multi	before	0.0931	0.0339	0.8969	0.8357	0.3011
		after	0.0782	0.0268	0.9127	0.8659	0.3019
Multi Inst.	Multi	before	0.0957	0.0372	0.8961	0.8329	0.2975
		after	0.0945	0.0366	0.8980	0.8392	0.2984
	Context-Aware	before	0.0673	0.0228	0.9284	0.8910	0.3002
		after	0.0661	0.0222	0.9296	0.8932	0.3006

6 Ablation Study

Robustness of CAMILA. In our framework, distinguishing applicable from non-applicable instructions is critical to prevent unintended edits. Each input may contain multiple instructions, which are classified by the MLLM into [MASK] and [NEG] tokens. On the Context-Aware Image Editing dataset, our model achieves a token classification accuracy of 90.21%, highlighting the robustness of CAMILA in filtering non-applicable instructions. Furthermore, we evaluate the alignment of generated masks with ground-truth edited regions using standard segmentation metrics. For applicable instructions, classified as [MASK] token, our model achieves an IoU of 0.3819 and a Dice score of 0.4986. As described in Equation (6), our model is trained with multiple loss objectives, not solely for segmentation accuracy. The generated masks are designed as high-level guidance, reflecting our focus on instruction fidelity and plausibility rather than strict spatial matching.

Evaluation on Instruction-Following Accuracy. We evaluate our method on the EMU dataset for both single-instruction and context-aware instruction tasks. Since the EMU dataset does not provide ground-truth target images, we utilize CLIP-T and CLIP-dir as evaluation metric. CLIP-dir measures how accurately the generated image aligns with the intended semantic direction of the instructions. As shown in Table 2, CAMILA achieves the highest CLIP-dir score in the context-aware instruction task, demonstrating its effectiveness in handling non-executable instructions.

Table 4: **Quantitative comparison on single instruction tasks.** CAMILA excels in single instruction tasks by generating precise masks that accurately target modification areas.

Method	Single-turn Instruction					Multi-turn Instruction				
	L1 $\downarrow$	L2 $\downarrow$	CLIP-I $\uparrow$	DINO $\uparrow$	CLIP-T $\uparrow$	L1 $\downarrow$	L2 $\downarrow$	CLIP-I $\uparrow$	DINO $\uparrow$	CLIP-T $\uparrow$
IP2P [4]	0.1129	0.0373	0.8540	0.7423	0.2918	0.1538	0.0575	0.8103	0.6511	0.2866
EMILIE [17]	0.1129	0.0373	0.8540	0.7423	0.2918	0.1268	0.0509	0.8557	0.7591	0.2916
MGIE [10]	0.0931	0.0383	0.8853	0.8088	0.2935	0.1312	0.0574	0.8571	0.7507	0.3013
SmartEdit [16]	0.0895	0.0353	0.9030	0.8308	0.3024	0.1333	0.0575	0.8567	0.7421	0.3021
FoI [11]	<u>0.0699</u>	<u>0.0206</u>	<u>0.9207</u>	<u>0.8779</u>	0.2980	<u>0.1084</u>	<u>0.0379</u>	<u>0.8681</u>	0.7838	0.2935
CAMILA (ours)	0.0596	0.0191	0.9375	0.9069	<u>0.3022</u>	0.0782	0.0268	0.9127	0.8659	<u>0.3019</u>

Single-Instruction Task Performance. CAMILA, optimized for multi-instruction tasks, also performs strongly on single-instruction tasks, as shown in Table 4. CAMILA achieves strong performance across most evaluation metrics. In contrast, SmartEdit shows a tendency toward over-editing. This reflects CAMILA’s balanced approach, minimizing over-editing while maintaining high fidelity. As shown in Figure 5, most models exhibit over-editing issues. Although FoI is designed to minimize over-editing, it encounters specific issues as follows: inaccurate attention maps in (a) prevent precise modifications to the ‘angry birds’ object, while in (b), additional frosting is incorrectly applied to cupcakes. These cases show that CAMILA achieves accurate edits without over-editing.

Impact of Surrogate Module Training. We compare the results on the multi-instruction tasks and single-instruction tasks before and after additional surrogate module training. As shown in Table 3, we demonstrate that mask generation through this surrogate module improves model performance. Interestingly, the improvement is not just for CLIP-T but also for the other metrics.



Figure 5: **Qualitative comparisons for single instruction task.** CAMILA demonstrates successful editing even in the single instruction task.

Table 5: **Large-scale baseline comparison on context-aware instruction task.** CAMILA outperforms larger diffusion-based models by generating contextually aligned and precise masks, highlighting that its context-aware design enhances editing quality without relying on increased model capacity.

Method	L1↓	L2↓	CLIP-I↑	DINO↑	CLIP-T↑
Step1X-Edit	0.0830	0.0329	0.8096	0.8892	0.2984
CAMILA	0.0661	0.0222	0.9296	0.8932	0.3006

Comparison with Large-Scale Baseline We additionally compare CAMILA with recent large-scale model such as Step1X-Edit [28], which use larger diffusion backbone [34] than Stable Diffusion [38]. As shown in Table 5, CAMILA achieves better performance on the context-aware image editing dataset despite its smaller diffusion model size. This implies that the context-aware design of CAMILA effectively enhances editing fidelity without relying on large model capacity.

Additional ablation studies on the variation of the Token Decoder and the inference time comparison are provided in Section D.1 and Section D.2, respectively.

7 Conclusion

In this paper, we addressed the limitations of current text-guided image editing models, particularly their difficulty in handling fine-grained edits, multi-instruction edits, and distinguishing between executable and non-executable instructions. Leveraging MLLMs, we generated specialized tokens ([MASK] and [NEG]) and designed token broadcaster to ensure the validity of the contextual coherence between instructions and the image, so that only relevant edits can be applied to the designated regions while ignoring non-executable instructions. For comprehensive evaluation, we created new datasets that can evaluate Context-Aware Image Editing task, where our approach achieves superior results across both qualitative and quantitative evaluations compared to state-of-the-art solutions.

References

- [1] Rameen Abdal, Yipeng Qin, and Peter Wonka. Image2stylegan: How to embed images into the stylegan latent space? In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 4432–4441, 2019.
- [2] Aishwarya Agarwal, Srikrishna Karanam, KJ Joseph, Apoorv Saxena, Koustava Goswami, and Balaji Vasan Srinivasan. A-star: Test-time attention segregation and retention for text-to-image synthesis. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2283–2293, 2023.
- [3] Yogesh Balaji, Seungjun Nah, Xun Huang, Arash Vahdat, Jiaming Song, Qinsheng Zhang, Karsten Kreis, Miika Aittala, Timo Aila, Samuli Laine, et al. ediff-i: Text-to-image diffusion models with an ensemble of expert denoisers. *arXiv preprint arXiv:2211.01324*, 2022.
- [4] Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18392–18402, 2023.
- [5] Tom B Brown. Language models are few-shot learners. *arXiv preprint arXiv:2005.14165*, 2020.
- [6] Hila Chefer, Yuval Alaluf, Yael Vinker, Lior Wolf, and Daniel Cohen-Or. Attend-and-excite: Attention-based semantic guidance for text-to-image diffusion models. *ACM Transactions on Graphics (TOG)*, 42(4):1–10, 2023.
- [7] Yong Xien Chng, Henry Zheng, Yizeng Han, Xuchong Qiu, and Gao Huang. Mask grounding for referring image segmentation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26573–26583, 2024.

- [8] Guillaume Couairon, Jakob Verbeek, Holger Schwenk, and Matthieu Cord. Diffedit: Diffusion-based semantic image editing with mask guidance. *arXiv preprint arXiv:2210.11427*, 2022.
- [9] Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. Instructblip: Towards general-purpose vision-language models with instruction tuning, 2023.
- [10] Tsu-Jui Fu, Wenze Hu, Xianzhi Du, William Yang Wang, Yinfei Yang, and Zhe Gan. Guiding instruction-based image editing via multimodal large language models. In *The Twelfth International Conference on Learning Representations*, 2024.
- [11] Qin Guo and Tianwei Lin. Focus on your instruction: Fine-grained and multi-instruction image editing by attention modulation. *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6986–6996, 2024.
- [12] Amir Hertz, Ron Mokady, Jay Tenenbaum, Kfir Aberman, Yael Pritch, and Daniel Cohen-Or. Prompt-to-prompt image editing with cross attention control. *arXiv preprint arXiv:2208.01626*, 2022.
- [13] Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *CoRR*, abs/2006.11239, 2020.
- [14] Jonathan Ho and Tim Salimans. Classifier-free diffusion guidance. *arXiv preprint arXiv:2207.12598*, 2022.
- [15] Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.
- [16] Yuzhou Huang, Liangbin Xie, Xintao Wang, Ziyang Yuan, Xiaodong Cun, Yixiao Ge, Jiantao Zhou, Chao Dong, Rui Huang, Ruimao Zhang, et al. Smartedit: Exploring complex instruction-based image editing with multimodal large language models. *arXiv preprint arXiv:2312.06739*, 2023.
- [17] KJ Joseph, Prateeksha Udhayan, Tripti Shukla, Aishwarya Agarwal, Srikrishna Karanam, Koustava Goswami, and Balaji Vasanth Srinivasan. Iterative multi-granular image editing using diffusion models. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 8107–8116, 2024.
- [18] Bahjat Kawar, Shiran Zada, Oran Lang, Omer Tov, Huiwen Chang, Tali Dekel, Inbar Mosseri, and Michal Irani. Imagic: Text-based real image editing with diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6007–6017, 2023.
- [19] Lei Ke, Mingqiao Ye, Martin Danelljan, Yu-Wing Tai, Chi-Keung Tang, Fisher Yu, et al. Segment anything in high quality. *Advances in Neural Information Processing Systems*, 36, 2024.
- [20] Byoungjip Kim, Sungik Choi, Dasol Hwang, Moontae Lee, and Honglak Lee. Transferring pre-trained multimodal representations with cross-modal similarity matching. *Advances in Neural Information Processing Systems*, 35:30826–30839, 2022.
- [21] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 4015–4026, 2023.
- [22] Yuval Kirstain, Adam Polyak, Uriel Singer, Shahbuland Matiana, Joe Penna, and Omer Levy. Pick-a-pic: An open dataset of user preferences for text-to-image generation. *Advances in Neural Information Processing Systems*, 36:36652–36663, 2023.
- [23] Xin Lai, Zhuotao Tian, Yukang Chen, Yanwei Li, Yuhui Yuan, Shu Liu, and Jiaya Jia. Lisa: Reasoning segmentation via large language model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9579–9589, 2024.

- [24] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, pages 19730–19742. PMLR, 2023.
- [25] Shanglin Li, Bohan Zeng, Yutang Feng, Sicheng Gao, Xiuhui Liu, Jiaming Liu, Lin Li, Xu Tang, Yao Hu, Jianzhuang Liu, et al. Zone: Zero-shot instruction-guided local editing. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6254–6263, 2024.
- [26] Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 26296–26306, 2024.
- [27] Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36, 2024.
- [28] Shiyu Liu, Yucheng Han, Peng Xing, Fukun Yin, Rui Wang, Wei Cheng, Jiaqi Liao, Yingming Wang, Honghao Fu, Chunrui Han, et al. Step1x-edit: A practical framework for general image editing. *arXiv preprint arXiv:2504.17761*, 2025.
- [29] Chenlin Meng, Yutong He, Yang Song, Jiaming Song, Jiajun Wu, Jun-Yan Zhu, and Stefano Ermon. Sdedit: Guided image synthesis and editing with stochastic differential equations. *arXiv preprint arXiv:2108.01073*, 2021.
- [30] Alex Nichol, Prafulla Dhariwal, Aditya Ramesh, Pranav Shyam, Pamela Mishkin, Bob McGrew, Ilya Sutskever, and Mark Chen. Glide: Towards photorealistic image generation and editing with text-guided diffusion models. *arXiv preprint arXiv:2112.10741*, 2021.
- [31] OpenAI. Gpt-4 technical report, 2023.
- [32] OpenAI. Gpt-4v(ision) system card, 2023.
- [33] Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, et al. Dinov2: Learning robust visual features without supervision. *arXiv preprint arXiv:2304.07193*, 2023.
- [34] William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 4195–4205, 2023.
- [35] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PMLR, 2021.
- [36] Hanoona Rasheed, Muhammad Maaz, Sahal Shaji, Abdelrahman Shaker, Salman Khan, Hisham Cholakkal, Rao M Anwer, Eric Xing, Ming-Hsuan Yang, and Fahad S Khan. Glamm: Pixel grounding large multimodal model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13009–13018, 2024.
- [37] Elad Richardson, Yuval Alaluf, Or Patashnik, Yotam Nitzan, Yaniv Azar, Stav Shapiro, and Daniel Cohen-Or. Encoding in style: a stylegan encoder for image-to-image translation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2287–2296, 2021.
- [38] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022.
- [39] Robin Rombach, Andreas Blattmann, and Björn Ommer. Text-guided synthesis of artistic images with retrieval-augmented diffusion models. *arXiv preprint arXiv:2207.13038*, 2022.
- [40] Shelly Sheynin, Adam Polyak, Uriel Singer, Yuval Kirstain, Amit Zohar, Oron Ashual, Devi Parikh, and Yaniv Taigman. Emu edit: Precise image editing via recognition and generation tasks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8871–8879, 2024.

- [41] Gemini Team, Rohan Anil, Sebastian Borgeaud, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, Katie Millican, et al. Gemini: a family of highly capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- [42] Narek Tumanyan, Michal Geyer, Shai Bagon, and Tali Dekel. Plug-and-play diffusion features for text-driven image-to-image translation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1921–1930, 2023.
- [43] Zhuofan Xia, Dongchen Han, Yizeng Han, Xuran Pan, Shiji Song, and Gao Huang. Gsva: Generalized segmentation via multimodal large language models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3858–3869, 2024.
- [44] Shaoan Xie, Zhifei Zhang, Zhe Lin, Tobias Hinz, and Kun Zhang. Smartbrush: Text and shape guided object inpainting with diffusion model. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 22428–22437, 2023.
- [45] Zeyue Xue, Guanglu Song, Qiushan Guo, Boxiao Liu, Zhuofan Zong, Yu Liu, and Ping Luo. Raphael: Text-to-image generation via large mixture of diffusion paths. *Advances in Neural Information Processing Systems*, 36, 2024.
- [46] Xin Yuan, Zhe Lin, Jason Kuen, Jianming Zhang, Yilin Wang, Michael Maire, Ajinkya Kale, and Baldo Faieta. Multimodal contrastive training for visual representation learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6995–7004, 2021.
- [47] Kai Zhang, Lingbo Mo, Wenhui Chen, Huan Sun, and Yu Su. Magicbrush: A manually annotated dataset for instruction-guided image editing. *Advances in Neural Information Processing Systems*, 36, 2024.
- [48] Lvmin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 3836–3847, 2023.
- [49] Shu Zhang, Xinyi Yang, Yihao Feng, Can Qin, Chia-Chih Chen, Ning Yu, Zeyuan Chen, Huan Wang, Silvio Savarese, Stefano Ermon, et al. Hive: Harnessing human feedback for instructional visual editing. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9026–9036, 2024.
- [50] Yang Zhao, Zhijie Lin, Daquan Zhou, Zilong Huang, Jiashi Feng, and Bingyi Kang. Bubogpt: Enabling visual grounding in multi-modal llms. *arXiv preprint arXiv:2307.08581*, 2023.
- [51] Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592*, 2023.

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [\[Yes\]](#)

Justification: Yes. The abstract outlines the high-level scope. Also, the introduction section clearly states the main contributions, accurately reflecting the paper's content and focus.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [\[Yes\]](#)

Justification: The limitations of our method, especially in failure scenarios, are further discussed in Section E.3. We further analyze the computational efficiency of our model in Section D.2

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [NA]

Justification: The paper does not present theoretical assumptions or provide formal proofs.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: We provide all the training details to reproduce the main experimental results in various sections including Section 4, Section 5.2, and Section A.

Guidelines:

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: We describe how we generated the new dataset in Section C.1. The code and dataset will be made publicly available after the paper is accepted for publication.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so “No” is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: We provide all the training details to reproduce the main experimental results in various sections including Section 4, Section 5.2, and Section A.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [No]

Justification: We do not report error bars as our evaluation relies on deterministic metrics that yield consistent values across runs. Since the outputs are fixed given the same inputs, statistical variance is not applicable in this setting.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.

- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: The inference time for image generation is reported in Section D.2.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: Our work conforms with the NeurIPS Code of Ethics.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: We address this in Section F for further details.

Guidelines:

- The answer NA means that there is no societal impact of the work performed.
- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.

- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [No]

Justification: Although we fine-tune a pretrained LLM, our method does not introduce additional misuse risks beyond those associated with the base model. No safeguards were added beyond those provided by the original pretrained model.

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: We address this in Section G for further details.

Guidelines:

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.

- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. **New assets**

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [NA]

Justification: We do not release any new assets in this paper.

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. **Crowdsourcing and research with human subjects**

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [NA]

Justification: Our work does not involve human subjects, and therefore does not require the details mentioned in this point.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. **Institutional review board (IRB) approvals or equivalent for research with human subjects**

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [NA]

Justification: Our work does not involve human subjects and does not require an IRB approval or equivalent.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.

- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. **Declaration of LLM usage**

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigorousness, or originality of the research, declaration is not required.

Answer: [NA]

Justification: The core method of CAMILA was developed without the involvement of LLMs.

Guidelines:

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (<https://neurips.cc/Conferences/2025/LLM>) for what should or should not be described.