
A Near-optimal, Scalable and Parallelizable Framework for Stochastic Bandits Robust to Adversarial Corruptions and Beyond

Zicheng Hu Cheng Chen*

MoE Engineering Research Center of Hardware/Software Co-design Technology and Application
East China Normal University
51275902019@stu.ecnu.edu.cn chchen@sei.ecnu.edu.cn

Abstract

We investigate various stochastic bandit problems in the presence of adversarial corruptions. A seminal work for this problem is the BARBAR [1] algorithm, which achieves both robustness and efficiency. However, it suffers from a regret of $O(KC)$, which does not match the lower bound of $\Omega(C)$, where K denotes the number of arms and C denotes the corruption level. In this paper, we first improve the BARBAR algorithm by proposing a novel framework called BARBAT, which eliminates the factor of K to achieve an optimal regret bound up to a logarithmic factor. We also extend BARBAT to various settings, including multi-agent bandits, graph bandits, combinatorial semi-bandits and batched bandits. Compared with the Follow-the-Regularized-Leader framework, our methods are more amenable to parallelization, making them suitable for multi-agent and batched bandit settings, and they incur lower computational costs, particularly in semi-bandit problems. Numerical experiments verify the efficiency of the proposed methods.

1 Introduction

The multi-armed bandit (MAB) problem is one of the most fundamental online learning tasks, and it has a long and rich history [2, 3]. Recently, as security concerns have grown, many studies focus on the so-called adversarially corrupted regime where an adversary is allowed to manipulate reward observations in a stochastic environment. Existing approaches can be broadly categorized into two classes: the Follow-the-Regularized-Leader (FTRL) family of algorithms [4, 5, 6, 7] and elimination-based algorithms [8, 1, 9, 10]. FTRL-based methods perform optimally in both stochastic and adversarial settings and also achieve optimal regret in the adversarially corrupted setting. However, these methods need to solve an optimization problem in each round, which may incur high computational costs in many scenarios such as semi-bandits. Also, the FTRL framework is challenging to extend to parallel settings such as batched bandits and multi-agent bandits. On the other hand, elimination-based methods such as BARBAR [1] are computationally efficient and easy to parallelize. However, the BARBAR algorithm suffers from a suboptimal regret of $O(KC)$, and it remains an open question how to achieve optimal regret by elimination-based methods.

In this paper, we improve upon the BARBAR [1] method and propose a novel framework called BARBAT (**B**ad Arms get **R**ecourse, **B**est Arm gets **T**rust) for stochastic bandits with adversarial corruptions. Unlike BARBAR, which employs dynamic epoch lengths, BARBAT adopts static epoch lengths by increasing the probability of selecting the estimated best arm. In addition, BARBAT utilizes epoch-varying failure probabilities δ_m instead of a global failure probability δ used in BARBAR, allowing us to achieve near-optimal regret bounds. We further demonstrate that our

*The corresponding author

BARBAT framework is scalable and parallelizable by extending it to various scenarios, including cooperative multi-agent multi-armed bandits (CMA2B) [11, 9, 12], graph bandits [13, 14], semi-bandits [15, 16, 17] and batched bandits [18, 19, 20]. The regret bounds of our methods along with comparisons to recent works are summarized in Table 1.

We summarize the contributions of this work as follows:

- **BARBAT framework** We propose the BARBAT framework for stochastic bandits with adversarial corruptions that achieves a near-optimal regret bound. This result resolves the open problem raised in [1]. Moreover, BARBAT does not require prior knowledge of the time horizon T .
- **Extensions of BARBAT** We extend our BARBAT framework to various corrupted bandit settings including multi-agent bandits, batched bandits, strongly observable graph bandits and d -set semi-bandits. We show that all resulting algorithms achieve near-optimal regret. To the best of our knowledge, our work is the first to study a robust algorithm for batched bandits. We also provide a lower bound for batched bandits with adversarial corruptions.
- **Comparison with FTRL** Compared to FTRL-based methods, our framework has advantages in three ways. First, our methods are more efficient. The FTRL framework requires solving a constrained convex optimization problem in each round. Such problems generally do not have a closed-form solution (except for FTRL with Shannon-entropy regularization) and can therefore be computationally costly, particularly in semi-bandit scenarios. Second, our BARBAT framework is parallelizable, making it suitable for batched and multi-agent settings, whereas extending FTRL to these scenarios is quite challenging. Lastly, as shown in the last column of Table 1, our methods do not require the assumption of a unique optimal action, which is required by FTRL-based methods in environments other than MAB.

Related work In recent years, the study of stochastic bandits with adversarial corruptions has garnered significant attention. Existing approaches can be broadly classified into two main categories: elimination-based algorithms [8, 1, 9, 10] and FTRL-based algorithms [4, 5, 6, 7]. Elimination-based methods, with the Active Arm Elimination (AAE) algorithm [21] being a prominent example, progressively discard suboptimal arms based on empirical reward estimates. By removing poorly performing arms, these algorithms focus their sampling efforts on a shrinking set of promising candidates. [8] introduced a multi-layer extension of the AAE algorithm, achieving a regret bound of $\tilde{O}(KC \sum_{\Delta_k > 0} 1/\Delta_k)$. Building on this, [1] proposed the BARBAR algorithm and reduced the regret to $\tilde{O}(KC + \sum_{\Delta_k > 0} 1/\Delta_k)$. On the other hand, FTRL-based methods [22, 23, 24, 25, 4, 5, 6, 7] can achieve optimal regret bounds in the stochastic, adversarial and adversarially corrupted settings. However, these methods are more computationally expensive than elimination-based methods since they need to solve an optimization problem in each round.

Stochastic bandits with adversarial corruptions can be extended to graph bandits, semi-bandits, and batched bandits, each of which benefits from specialized techniques to handle challenges such as exponential action spaces, partial observability, or limited adaptivity [26, 13, 14, 15, 16, 17, 18, 19, 20]. Finally, multi-agent extensions [9, 11, 27, 12] enable agents to pool information and expedite the learning process but often encounter larger regret bounds under adversarial corruptions or rely on group-level performance guarantees rather than individual regrets.

2 Preliminaries

We consider stochastic multi-armed bandits with adversarial corruptions. In this setting, the agent interacts with the environment over T rounds by selecting an arm from a set of K arms, denoted by $[K]$. In each round t , the environment generates an i.i.d. random reward vector $\{r_{t,k}\}_{k \in [K]}$ from an unknown fixed distribution. An adversary, having access to the reward vector, subsequently attacks these rewards to produce the corrupted reward vector $\{\tilde{r}_{t,k}\}_{k \in [K]}$. The agent then selects an arm I_t according to its strategy and observes the corresponding corrupted reward $\tilde{r}_{t,I_t}$. Let μ_k denote the mean reward of arm $k \in [K]$, and let $k^* \in \arg \max_{k \in [K]} \mu_k$ be an optimal arm. The corruption level is defined as $C = \sum_{t=1}^T \max_{k \in [K]} |\tilde{r}_{t,k} - r_{t,k}|$. The suboptimality gap for arm k is defined as $\Delta_k = \mu_k - \mu_{k^*}$, and we denote $\Delta = \min_{\Delta_k > 0} \Delta_k$ as the smallest positive suboptimality gap.

Setting	Algorithm	Regret	Prop. 1	Prop. 2
Multi-arm bandits	BARBAR [1]	$KC + \sum_{\Delta_k > 0} \frac{\log^2(T)}{\Delta_k}$	✓	✓
	$\frac{1}{2}$ -Tsallis-FTRL [4]	$C + \sum_{\Delta_k > 0} \frac{\log(T)}{\Delta_k}$	✗	✗
	$\frac{1}{2}$ -Tsallis-FTRL [6]	$C + \sum_{\Delta_k > 0} \frac{\log(T)}{\Delta_k}$	✗	✓
	Shannon-FTRL [6, 13]	$C + \sum_{\Delta_k > 0} \frac{\log^2(T)}{\Delta_k}$	✓	✓
	Algorithm 1	$C + \sum_{\Delta_k > 0} \frac{\log^2(T)}{\Delta_k}$	✓	✓
	Lower bound [1]	$C + \sum_{\Delta_k > 0} \frac{\log(T)}{\Delta_k}$	–	–
Multi-agent multi-arm bandits	CBARAC [9]	$C + \frac{K \log^2(T)}{\Delta}$	✓	✓
	DRAA [12]	$\frac{C}{V} + \frac{K \log^2(T)}{V \Delta}$	✓	✓
	Algorithm 2	$\frac{C}{V} + \sum_{\Delta_k > 0} \frac{\log^2(T)}{V \Delta_k}$	✓	✓
	Lower bound [‡]	$\frac{C}{V} + \sum_{\Delta_k > 0} \frac{\log(T)}{V \Delta_k}$	–	–
Batched bandits	Algorithm 3	$CT^{\frac{1}{L+3}} + T^{\frac{4}{L+3}} \left(\sum_{\Delta_k > 0} \frac{L \log(T)}{\Delta_k} + \frac{K \log(T)}{L \Delta} \right)$	✓	✓
	Lower bound (Ours)	$T^{1/L} (K + C^{1-1/L})$	–	–
Strongly observable graph bandits [†]	Elise [10]	$\alpha C + \sum_{k \in \mathcal{D}^*} \frac{\log^2(T)}{\Delta_k}$	✓	✓
	Shannon-FTRL [13]	$C + \frac{\alpha \log^3(T)}{\Delta}$	✓	✗
	$(1 - \frac{1}{\log(K)})$ -Tsallis-FTRL[14]	$C + \frac{\min\{\tilde{\alpha}, \alpha \log(K)\} \log(T)}{\Delta}$	✗	✗
	Algorithm 4	$C + \sum_{k \in \mathcal{I}^*} \frac{\log^2(T)}{\Delta_k}$	✓	✓
	Lower bound [‡]	$C + \sum_{k \in \mathcal{I}^*} \frac{\log(T)}{\Delta_k}$	–	–
d -set semi-bandits	HYBRID [15]	$dC + \sum_{\Delta_k > 0} \frac{\log(T)}{\Delta_k}$	✗	✗
	LBINF [16]	$dC + \sum_{\Delta_k > 0} \frac{\log(T)}{\Delta_k}$	✗	✗
	LBINF_LS, LBINF_GD [17]	$dC + \sum_{\Delta_k > 0} \frac{\log(T)}{\Delta_k}$	✗	✗
	Algorithm 5	$dC + \sum_{\Delta_k > 0} \frac{\log^2(T)}{\Delta_k}$	✓	✓
	Lower bound [‡]	$dC + \sum_{\Delta_k > 0} \frac{\log(T)}{\Delta_k}$	–	–

Table 1: “Prop. 1” denotes that the algorithm can efficiently compute the sampling probabilities of the arms, while “Prop. 2” denotes that the assumption of a unique optimal arm is not required. For graph bandits, α denotes the *independence number* of graph G and $\mathcal{I}^*$ denotes the set of at most $O(\alpha \ln(\frac{K}{\alpha} + 1))$ arms with the smallest gaps. For batched bandits, L denotes the number of batches. “†”: Elise is restricted to undirected graphs, while the remaining studies address directed graphs. “‡”: These lower bounds can be directly achieved by combining the corruption lower bound from [1] with the lower bound for the stochastic setting.

Our goal is to minimize the pseudo-regret:

$$R(T) = \max_{k \in [K]} \mathbb{E} \left[\sum_{t=1}^T r_{t,k} \right] - \mathbb{E} \left[\sum_{t=1}^T r_{t,I_t} \right] = \sum_{t=1}^T \mu_{k^*} - \sum_{t=1}^T \mu_{I_t} = \sum_{t=1}^T \Delta_{I_t},$$

which is a standard definition in stochastic bandits. Notice that FTRL-based methods [26, 13, 14, 15, 16, 17, 18, 19, 20] typically adopt a different form of pseudo-regret, denoted as $\tilde{R}(T) = \max_k \mathbb{E} \left[\sum_{t=1}^T (\tilde{r}_{t,I_t} - \tilde{r}_{t,k}) \right]$, which is more appropriate for adversarial settings. However, we argue

that comparing against the true means, rather than the corrupted rewards, is more natural. Theorem 3 in [9] presents the conversion between the two definitions of pseudo-regret in the adversarially corrupted setting as $R(T) = \Theta(\tilde{R}(T) + O(C))$.

CMA2B In cooperative multi-agent multi-armed bandits, V agents collaborate to play the bandit game. We denote the set of agents by $[V]$. All agents are allowed to pull any arm from $[K]$. When multiple agents pull the same arm, each receives an independent reward drawn from that arm's distribution. The adversary is allowed to attack all agents with a total corruption budget C . We only consider the centralized setting where each agent can broadcast messages to all other agents without any delays. For simplicity, we define the total communication cost for each agent v as:

$$\text{Cost}_v(T) \triangleq \sum_{v \in [V]} \sum_{t=1}^T \mathbb{I}\{\text{agent } v \text{ broadcasts a message to other agents in round } t\}.$$

We aim to minimize the individual pseudo-regret for each agent v over a horizon of T rounds:

$$R_v(T) = \max_{k \in [K]} \mathbb{E} \left[\sum_{t=1}^T r_{v,t}(k) \right] - \mathbb{E} \left[\sum_{t=1}^T r_{v,t}(I_{v,t}) \right] = \sum_{t=1}^T (\mu_{k^*} - \mu_{I_{v,t}}) = \sum_{t=1}^T \Delta_{I_{v,t}}.$$

Batched bandits In this case, we suppose the agent can only observe the corrupted rewards from a batch after it has concluded. The time horizon T is divided into L batches, represented by a grid $\mathcal{T} = \{t_1, t_2, \dots, t_L\}$, where $1 \leq t_1 < t_2 < \dots < t_L = T$. As in most previous works [19], the number of batches L of interest is at most $\log(T)$. Additionally, the grid can be one of two types:

- **Static Grid:** The grid is fixed and predetermined before any arm sampling occurs.
- **Adaptive Grid:** The value of t_j is determined dynamically after observing the rewards up to time t_{j-1} , which may incorporate external randomness.

Previous works [18, 19, 28, 20, 29] mainly focus on stochastic batched bandits. To the best of our knowledge, no existing work studies stochastic batched bandits under adversarial corruptions.

Strongly observable graph bandits In this setting, when the agent pulls arm k , it may observe the rewards of other arms. This reward-feedback structure is represented by a directed graph $G = ([K], E)$, where pulling arm k_i reveals the rewards of each arm k_j such that $(k_i, k_j) \in E$. Each arm either has a self-loop or receives incoming edges from all other arms [30]. Let α denote the independence number of G , i.e., the maximum size of an independent set. A vertex set D is called an out-domination set of G if every vertex in G has an incoming edge from some vertex in D .

d -set semi-bandits The d -set semi-bandits problem is a special case of semi-bandits. Given $d \in [K-1]$, in each round t the agent selects a combinatorial action $\mathbf{x}_t$ (containing d distinct arms) from the set $\mathcal{X} = \{\mathbf{x} \in \{0, 1\}^K \mid \sum_{k=1}^K \mathbf{x}(k) = d\}$, where $\mathbf{x}(k) = 1$ indicates that arm k is selected. Then the agent can observe the corrupted rewards for each arm in the action (i.e., for each arm k such that $\mathbf{x}_t(k) = 1$). Let μ_k denote the mean reward of arm $k \in [K]$. Without loss of generality, we assume $\mu_1 \geq \mu_2 \geq \dots \geq \mu_K$ and denote $\Delta_k = \mu_d - \mu_k$ for all $k > d$. We aim to minimize the pseudo-regret over a horizon of T rounds:

$$R(T) = \max_{\mathbf{x} \in \mathcal{X}} \mathbb{E} \left[\sum_{t=1}^T \sum_{k: \mathbf{x}_t(k)=1} r_{t,k} \right] - \mathbb{E} \left[\sum_{t=1}^T \sum_{k: \mathbf{x}_t(k)=1} r_{t,k} \right] = \sum_{t=1}^T \left(\sum_{k=1}^d \mu_k - \sum_{k: \mathbf{x}_t(k)=1} \mu_k \right).$$

3 Stochastic Multi-Armed Bandits Robust to Adversarial Corruptions

Main idea Notice that in the BARBAR [1] algorithm, the arm k is approximately drawn $n_k^m = O(1/(\Delta_k^{m-1})^2)$ times in expectation during epoch m , where Δ_k^{m-1} is the estimated gap computed in the previous epoch. Thus, each epoch has a length of approximately $N_m \approx O(\sum_k 1/(\Delta_k^{m-1})^2)$. Consequently, the adversary can significantly extend the length of an epoch by utilizing all of the corruption budget in the previous epoch, thereby implicitly increasing the number of pulls for

Algorithm 1 BARBAT: Bad Arms get Recourse, Best Arm gets Trust

1: **Initialization:** Set the initial round $T_0 \leftarrow 0$, $\Delta_k^0 \leftarrow 1$, and $r_k^0 \leftarrow 0$ for all $k \in [K]$.
2: **for** epochs $m = 1, 2, \dots$ **do**
3: Set $\zeta_m \leftarrow (m+4)2^{2(m+4)} \ln(K)$ and $\delta_m \leftarrow 1/(K\zeta_m)$.
4: Set $\lambda_m \leftarrow 2^8 \ln(4K/\delta_m)$ and $\beta_m \leftarrow \delta_m/K$.
5: Set $n_k^m \leftarrow \lambda_m (\Delta_k^{m-1})^{-2}$ for all $k \in [K]$.
6: Set $N_m \leftarrow \lceil K\lambda_m 2^{2(m-1)} \rceil$ and $T_m \leftarrow T_{m-1} + N_m$.
7: Set $k_m \leftarrow \arg \max_{k \in [K]} r_k^{m-1}$ and compute $\tilde{n}_k^m$ according to (1).
8: **for** $t = T_{m-1} + 1$ to T_m **do**
9: Choose arm $I_t \sim p_m$ where $p_m(k) = \tilde{n}_k^m / N_m$.
10: Observe the corrupted reward $\tilde{r}_{t, I_t}$ and update the total reward $S_{I_t}^m \leftarrow S_{I_t}^m + \tilde{r}_{t, I_t}$.
11: **end for**
12: Set $r_k^m \leftarrow \min\{S_k^m / \tilde{n}_k^m, 1\}$ and $r_*^m \leftarrow \max_{k \in [K]} \left\{ r_k^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \right\}$.
13: Set $\Delta_k^m \leftarrow \max\{2^{-m}, r_*^m - r_k^m\}$.
14: **end for**

suboptimal arms. To address this challenge, our BARBAT algorithm chooses a data-independent epoch length $N_m \approx O(K2^{2(m-1)})$, which cannot be affected by the adversary. We still allocate $n_k^m = O(1/(\Delta_k^{m-1})^2)$ pulls to each arm k , but assign all remaining pulls to the estimated optimal arm k_m , resulting in pulling arm k_m for about $N_m - \sum_{k \neq k_m} n_k^m$ rounds. On the other hand, pulling the estimated optimal arm k_m too many times may lead to additional regret, as arm k_m could be suboptimal. To mitigate this additional regret, we adopt epoch-varying failure probabilities $\delta_m \approx O(1/(mK2^{2m}))$ for epoch m rather than using a global failure probability δ . The choice of δ_m also eliminates the need to know the time horizon T .

Algorithm We introduce our BARBAT framework for stochastic bandits with adversarial corruptions in Algorithm 1. In each epoch m , BARBAT sets the failure probability as $\delta_m = 1/(K\zeta_m)$, where ζ_m is chosen to make $\delta_m \leq 1/N_m$. The algorithm sets the epoch length to be $N_m = \lceil K\lambda_m 2^{2(m-1)} \rceil \geq \sum_{k \in [K]} n_k^m$. We denote k_m as the arm with the maximum empirical reward in the previous epoch; in case of ties, the arm with the smallest index is chosen. Then the number of pulls for each arm is set to

$$\tilde{n}_k^m = \begin{cases} n_k^m, & k \neq k_m, \\ N_m - \sum_{k \neq k_m} n_k^m, & k = k_m. \end{cases} \quad (1)$$

During epoch m , the agent pulls arm I_t with probability $p_m(I_t) = \tilde{n}_{I_t}^m / N_m$, observes the corrupted reward $\tilde{r}_{t, I_t}$, and accumulates the total reward $S_{I_t}^m$. At the end of each epoch m , BARBAT updates the estimated reward $r_k^m = \min\{S_k^m / \tilde{n}_k^m, 1\}$ and computes the estimated suboptimality gap Δ_k^m .

An example showing how BARBAT avoids paying an $O(KC)$ term Gupta et al. [1] provide an example where BARBAR suffers regret $\Omega(KC)$, in which all corruptions happen in an epoch c with corruption level $C = N_c = \lambda(2^{2(c-1)} + O(K))$. Then the algorithm will lose all information from the previous epochs so that the length of the next epoch becomes $N_{c+1} = K\lambda 2^{2c} = O(KC)$ and each arm will be pulled uniformly. In this scenario, BARBAR will pull each arm approximately $O(C)$ times and generate $O((K-1)C)$ regret. On the other hand, our BARBAT algorithm fixes the length of the m -th epoch to be $N_m = K\lambda_m 2^{2(m-1)}$. If the adversary intends to corrupt an entire epoch c , the required corruption level is $C = N_c = K\lambda 2^{2(c-1)}$, which is K times larger than needed to attack BARBAR. Thus our BARBAT algorithm will only suffer $O(C)$ regret from adversarial corruptions.

Regret Bound BARBAT achieves the following regret bound, with proofs deferred to Appendix B.1.

Theorem 1. *The expected regret of BARBAT satisfies*

$$R(T) = O\left(C + \sum_{\Delta_k > 0} \frac{\log(T) \log(KT)}{\Delta_k} + \frac{K \log(1/\Delta) \log(K/\Delta)}{\Delta}\right).$$

Algorithm 2 MA-BARBAT

```

1: Initialization: Set the initial round  $T_0 \leftarrow 0$ ,  $\Delta_k^0 \leftarrow 1$ , and  $r_k^0 \leftarrow 0$  for all  $k \in [K]$ .
2: for epoch  $m = 1, 2, \dots$  do
3:   Set  $\zeta_m \leftarrow (m+4)2^{2(m+4)} \ln(VK)$  and  $\delta_m \leftarrow 1/(VK\zeta_m)$ .
4:   Set  $\lambda_m \leftarrow 2^8 \ln(4K/\delta_m)/V$  and  $\beta_m \leftarrow \delta_m/(VK)$ .
5:   Set  $n_k^m \leftarrow \lambda_m (\Delta_k^{m-1})^{-2}$  for all  $k \in [K]$ .
6:   Set  $N_m \leftarrow \lceil K\lambda_m 2^{2(m-1)} \rceil$  and  $T_m \leftarrow T_{m-1} + N_m$ .
7:   Set  $k_m \leftarrow \arg \max_{k \in [K]} r_k^{m-1}$  and compute  $\tilde{n}_k^m$  according to (1).
8:   for  $t = T_{m-1} + 1$  to  $T_m$  do
9:     Each agent chooses arm  $I_t \sim p_m$ , where  $p_m(k) = \tilde{n}_k^m/N_m$ .
10:    Each agent observes the corrupted reward  $\tilde{r}_{t,I_t}$  and compute  $S_{I_t}^m \leftarrow S_{I_t}^m + \tilde{r}_{t,I_t}$ .
11:  end for
12:  Each agent  $v$  broadcasts the messages  $\{S_{v,k}^m\}_{k \in [K]}$  to other agents.
13:  Set  $r_k^m \leftarrow \min\{\sum_{v \in [V]} S_{v,k}^m/(V\tilde{n}_k^m), 1\}$  and  $r_*^m \leftarrow \max_{k \in [K]} \left\{r_k^m - \sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_k^m}}\right\}$ .
14:  Set  $\Delta_k^m \leftarrow \max\{2^{-m}, r_*^m - r_k^m\}$ .
15: end for

```

Remark 1. The regret bound of BARBAT contains an extra term $K \log^2(1/\Delta)/\Delta$. Notice that this term is independent of T , making it generally much smaller than the major term $\sum_{\Delta_k > 0} \frac{\log^2(T)}{\Delta_k}$.

Remark 2. Notice that a concurrent work [12] also employs static epoch lengths and removes the factor K from the regret bound. However, they adopt a global δ across all epochs, resulting in a regret of $O(C + K \log^2(T)/\Delta)$, which is worse than our regret of $O\left(C + \sum_{\Delta_k > 0} \frac{\log^2(T)}{\Delta_k}\right)$.

4 Extensions

In this section, we extend BARBAT to various corrupted bandit settings and introduce the necessary modifications to accommodate the specific configurations of these environments.

4.1 Cooperative Multi-Agent Multi-Armed Bandits

We extend BARBAT to the multi-agent setting and propose the MA-BARBAT (Multi-Agent BARBAT) algorithm in Algorithm 2. In each epoch m , all agents pull arms according to the same probability distribution and broadcast their total rewards $\{S_{v,k}^m\}_{k=1}^K$ at the end of the epoch. Each agent then updates the estimated suboptimality gaps Δ_k^m using the received messages and its own observations. We present the regret bound and communication cost of our MA-BARBAT algorithm in the following theorem, with the proof given in Appendix B.2.

Theorem 2. The MA-BARBAT algorithm requires only a communication cost of $V \log(VT)$ over T rounds. The individual regret of each agent v satisfies:

$$R_v(T) = O\left(\frac{C}{V} + \sum_{\Delta_k > 0} \frac{\log(VT) \log(KVT)}{V\Delta_k} + \frac{K \log(1/\Delta) \log(KV/\Delta)}{V\Delta}\right).$$

Remark 3. The regret bound demonstrates that collaboration reduces each agent's individual regret by a factor of V . As summarized in Table 1, our bound is tighter than those of previous works on CMA2B with adversarial corruptions.

Remark 4. Notice that some recent works [11] on CMA2B achieve a communication cost of only $o(\log(T))$. However, these methods rely on the assumption of a unique best arm. In the presence of multiple best arms, it remains unclear whether a communication cost of $o(\log(T))$ is sufficient.

4.2 Batched Bandits

We extend BARBAT to the batched bandit setting and propose the BB-BARBAT (Batched Bandits-BARBAT) algorithm in Algorithm 3. The BB-BARBAT algorithm sets the epoch lengths N_m to

Algorithm 3 BB-BARBAT

1: **Initialization:** Set the initial round $T_0 \leftarrow 0$, $\Delta_k^0 \leftarrow 1$, and $r_k^0 \leftarrow 0$ for all $k \in [K]$.
2: **for** epochs $m = 1, 2, \dots$ **do**
3: Set $a \leftarrow T^{\frac{1}{2(L+1)}}$, $\zeta_m \leftarrow (m+4)a^{2(m+4)} \ln(aK)$ and $\delta_m \leftarrow 1/(K\zeta_m)$.
4: Set $\lambda_m \leftarrow a^8 \ln(4K/\delta_m)$ and $\beta_m \leftarrow \delta_m/K$.
5: Set $n_k^m \leftarrow \lambda_m(\Delta_k^{m-1})^{-2}$ for all $k \in [K]$.
6: Set $N_m \leftarrow \lceil K\lambda_m a^{2(m-1)} \rceil$ and $T_m \leftarrow T_{m-1} + N_m$.
7: Set $k_m \leftarrow \arg \max_{k \in [K]} r_k^{m-1}$ and compute $\tilde{n}_k^m$ according to (1).
8: **for** $t = T_{m-1} + 1$ to T_m **do**
9: Choose arm $I_t \sim p_m$ where $p_m(k) = \tilde{n}_k^m / N_m$.
10: **end for**
11: Observe the all corrupted rewards $\tilde{r}_{I_t}$ in this batch and compute $S_{I_t}^m \leftarrow S_{I_t}^m + \tilde{r}_{I_t}$.
12: Set $r_k^m \leftarrow \min\{S_k^m / \tilde{n}_k^m, 1\}$ and $r_*^m \leftarrow \max_{k \in [K]} \left\{ r_k^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \right\}$.
13: Set $\Delta_k^m \leftarrow \max\{a^{-m}, r_*^m - r_k^m\}$.
14: **end for**

be approximately $O(T^{\frac{m}{L+1}})$ ensuring that the number of epochs matches the number of batches. In this way, each epoch serves as a batch, making the BB-BARBAT algorithm almost identical to the BARBAT algorithm. We present the regret upper bound of BB-BARBAT and the lower bound for corrupted batched bandits in Theorems 3 and 4, respectively. The proofs are deferred to Appendix B.3.

Theorem 3. *For corrupted batched bandits with a static grid, the regret of BB-BARBAT satisfies*

$$R(T) = O\left(CT^{\frac{1}{L+3}} + T^{\frac{4}{L+3}}\left(\sum_{\Delta_k > 0} \frac{L \log(KT)}{\Delta_k} + \frac{K \log(T) \log(1/\Delta) \log(K/\Delta)}{L\Delta}\right)\right).$$

Theorem 4. *For any algorithm, there exists an instance of batched bandits with a static grid such that*

$$R(T) \geq \Omega\left(T^{\frac{1}{L}}\left(K + C^{1-\frac{1}{L}}\right)\right).$$

Remark 5. *There is still a gap between our upper bound and the lower bound. We believe that our lower bound is nearly tight. Achieving optimal regret upper bounds for corrupted batched bandits remains an interesting open question.*

4.3 Strongly Observable Graph Bandits

We extend BARBAT to strongly observable graph bandits and propose the SOG-BARBAT (Strongly-Observable Graph bandits-BARBAT) algorithm, presented in Algorithm 4. Our method adopts Z^m and H^m to denote the expected pulls and expected observations in epoch m , respectively. G^m denotes the graph used in the m -th epoch. SOG-BARBAT adopts the proposed Algorithm 6 (in Appendix A) to compute the out-domination set D^m of G^m , whose size is at most $\alpha(1 + 2 \ln(K/\alpha))$. Moreover, if G^m is acyclic, we can guarantee that $|D^m| \leq \alpha$. Then SOG-BARBAT computes $\bar{H}^m$, which is the minimal number of additional pulls per out-dominating arm that ensures some vertex meets its observation requirement. After that, SOG-BARBAT updates Z^m and H^m , and removes all nodes that have now been sufficiently observed from G^m . Repeating these steps ensures that by the end of epoch m , all arms have been observed sufficiently. The regret bound for SOG-BARBAT is presented as follows, with the proof given in Appendix B.4.

Theorem 5. *For any strongly observable directed graph $G = ([K], E)$ with independence number α , the expected regret of SOG-BARBAT satisfies*

$$\mathbb{E}[R(T)] = O\left(C + \sum_{k \in \mathcal{I}^*} \frac{\log(T) \log(KT)}{\Delta_k} + \frac{K \log(1/\Delta) \log(K/\Delta)}{\Delta}\right),$$

where $\mathcal{I}^*$ is the set of at most $\lceil \alpha(1 + 2 \ln(K/\alpha)) \rceil$ arms with the smallest gaps. Especially, for directed acyclic graphs and undirected graphs, $\mathcal{I}^*$ is the set of at most α arms with the smallest gaps.

Remark 6. *The regret upper bound of SOG-BARBAT depends on $|\mathcal{I}^*| = O(\alpha \ln(K/\alpha + 1))$, which matches the lower bound established by [31]. When G is an acyclic graph or an undirected graph, we have $|\mathcal{I}^*| \leq \alpha$, indicating that SOG-BARBAT performs better under this condition.*

Algorithm 4 SOG-BARBAT: Strongly Observable Graph-BARBAT

```
1: Input: A Strongly Observable Directed Graph  $G$ .
2: Initialization: Set the initial round  $T_0 \leftarrow 0$ ,  $\Delta_k^0 \leftarrow 1$ , and  $r_k^0 \leftarrow 0$  for all  $k \in [K]$ .
3: for epochs  $m = 1, 2, \dots$  do
4:   Set  $\zeta_m \leftarrow (m+4)2^{2(m+4)} \ln(K)$  and  $\delta_m \leftarrow 1/(K\zeta_m)$ .
5:   Set  $\lambda_m \leftarrow 2^8 \ln(4K/\delta_m)$  and  $\beta_m \leftarrow \delta_m/K$ .
6:   Set  $n_k^m \leftarrow \lambda_m (\Delta_k^{m-1})^{-2}$  for all  $k \in [K]$ .
7:   Set  $N_m \leftarrow \lceil K\lambda_m 2^{2(m-1)} \rceil$  and  $T_m \leftarrow T_{m-1} + N_m$ .
8:   Set  $k_m \leftarrow \arg \max_{k \in [K]} r_k^{m-1}$ .
9:   Set  $Z_k^m \leftarrow 0$  and  $H_k^m \leftarrow 0$  for all arms  $k \in [K]$ ,  $G^m \leftarrow G$ .
10:  while  $H_k^m \geq n_k^m$  holds for all arms  $k \in [K]$  do
11:    Compute an out-domination set  $D^m$  of  $G^m$  by Algorithm 6.
12:    Compute  $\bar{H}^m \leftarrow \min_{k \in [K]} (n_k^m - H_k^m)$ .
13:    for each arm  $k_i \in D^m$  do
14:      Update  $Z_{k_i}^m \leftarrow Z_{k_i}^m + \bar{H}^m$  and  $H_{k_i}^m \leftarrow H_{k_i}^m + \bar{H}^m$ 
15:      Update  $H_{k_j}^m \leftarrow H_{k_j}^m + \bar{H}^m$  for all arms  $(k_i, k_j) \in E$  with  $k_j \neq k_i$ 
16:    end for
17:    Remove all arms which satisfy  $H_k^m \geq n_k^m$  from  $G^m$ .
18:  end while
19:  Set  $\tilde{n}_k^m = \begin{cases} Z_k^m & k \neq k_m \\ N_m - \sum_{k \neq k_m} Z_k^m & k = k_m \end{cases}$ , and  $\hat{n}_{k_j}^m \leftarrow \sum_{(k_i, k_j) \in E} \tilde{n}_{k_i}^m$ .
20:  for  $t = T_{m-1} + 1$  to  $T_m$  do
21:    Choose arm  $I_t \sim p_m$  where  $p_m(k) = \tilde{n}_k^m / N_m$ .
22:    Observe the corrupted reward  $\tilde{r}_{t, I_t}$  and update the total reward  $S_{I_t}^m \leftarrow S_{I_t}^m + \tilde{r}_{t, I_t}$ .
23:  end for
24:  Set  $r_k^m \leftarrow \min\{S_k^m / \hat{n}_k^m, 1\}$  and  $r_*^m \leftarrow \max_{k \in [K]} \left\{ r_k^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} \right\}$ 
25:  Set  $\Delta_k^m \leftarrow \max\{2^{-m}, r_*^m - r_k^m\}$ .
26: end for
```

Remark 7. Compared to FTRL-based methods [13, 14], whose regret bounds depend on the smallest suboptimality gap $1/\Delta$, our bound reveals the relationship between the regret and the suboptimality gap of all arms. In addition, these works require prior knowledge of the independence number α , which is NP-hard to compute, whereas SOG-BARBAT does not need such prior knowledge.

Remark 8. Compared with [10], which adapts BARBAT to graph bandits with undirected graphs, our SOG-BARBAT method improves the corruption-dependent term from $O(\alpha C)$ to $O(C)$. Also, our method can be applied to bandits with directed graphs.

4.4 d -set Semi-bandits

We extend BARBAT to the d -set semi-bandit setting and propose the DS-BARBAT (**d-Set BARBAT**) algorithm in Algorithm 5. In this setting, the optimal action is a subset of d distinct arms. Thus, DS-BARBAT estimates the best action $\mathcal{K}_m$ as set of d distinct arms with the highest empirical rewards in the previous epoch. When estimating the suboptimality gap, DS-BARBAT considers the arm with the d -th largest empirical reward, since the set of the first d arms is the optimal action. The regret bound for DS-BARBAT is presented as follows, with the proof provided in Appendix B.5:

Theorem 6. The regret of DS-BARBAT satisfies

$$R(T) = O \left(dC + \sum_{k=d+1}^K \frac{\log(T) \log(KT)}{\Delta_k} + \frac{dK \log(1/\Delta) \log(K/\Delta)}{\Delta} \right).$$

Remark 9. Notice that our DS-BARBAT algorithm can efficiently compute the sampling probability p_m , while FTRL-based methods [25, 15, 16, 17] need to solve a complicated convex optimization problem in each round, which is rather expensive. The time comparison in Table 3 in Appendix C.3 demonstrates that our DS-BARBAT algorithm is significantly faster than these FTRL-based methods.

Algorithm 5 DS-BARBAT: d-Set-BARBAT

- 1: **Initialization:** Set the initial round $T_0 \leftarrow 0$, $\Delta_k^0 \leftarrow 1$, and $r_k^0 \leftarrow 0$ for all $k \in [K]$.
 - 2: **for** epochs $m = 1, 2, \dots$ **do**
 - 3: Set $\zeta_m \leftarrow (m+4)2^{2(m+4)} \ln(K)$, and $\delta_m \leftarrow 1/(K\zeta_m)$
 - 4: Set $\lambda_m \leftarrow 2^8 \ln(4K/\delta_m)$ and $\beta_m \leftarrow \delta_m/K$.
 - 5: Set $n_k^m \leftarrow \lambda_m (\Delta_k^{m-1})^{-2}$ for all arms $k \in [K]$.
 - 6: Set $N_m \leftarrow \lceil K\lambda_m 2^{2(m-1)}/d \rceil$ and $T_m \leftarrow T_{m-1} + N_m$.
 - 7: Set the arm subsets $\mathcal{K}_m \leftarrow \arg \max_{k \in [K]} r_k^{m-1}$ with $|\mathcal{K}_m| = d$.
 - 8: Set $\tilde{n}_k^m = \begin{cases} n_k^m & k \notin \mathcal{K}_m \\ N_m - \sum_{k \notin \mathcal{K}_m} n_k^m / d & k \in \mathcal{K}_m \end{cases}$.
 - 9: **for** $t = T_{m-1} + 1$ to T_m **do**
 - 10: Choose action $\mathbf{x}_t \sim p_m$ where $p_m(k) = \tilde{n}_k^m / N_m$.
 - 11: For each arm k with $\mathbf{x}_t(k) = 1$, observe $\tilde{r}_{t,k}$ and update the total reward $S_k^m \leftarrow S_k^m + \tilde{r}_{t,k}$.
 - 12: **end for**
 - 13: Set $r_k^m \leftarrow \min\{S_k^m / \tilde{n}_k^m, 1\}$.
 - 14: Set $r_*^m \leftarrow \top_d \left(\left\{ r_k^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \right\}_{k \in [K]} \right)$, where $\top_d(\mathcal{A})$ returns the d -th largest value in $\mathcal{A}$.
 - 15: Set $\Delta_k^m \leftarrow \max\{2^{-m}, r_*^m - r_k^m\}$.
 - 16: **end for**
-

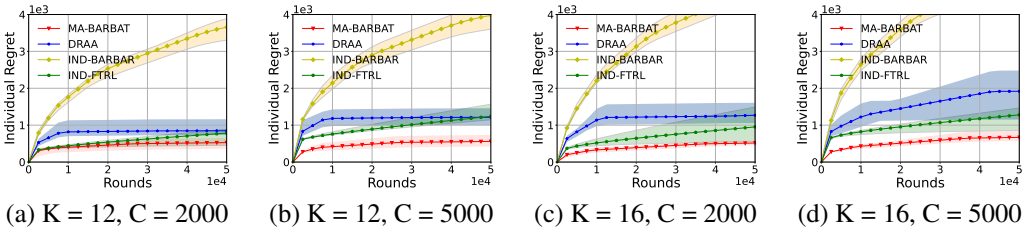


Figure 1: Comparison between MA-BARBAT, DRAA, IND-BARBAR and IND-FTRL in cooperative multi-agent multi-armed bandits.

5 Experiments

In this section, we present numerical results to demonstrate the robustness and effectiveness of our framework. All experiments are implemented in Python 3.11 and conducted on a Windows laptop equipped with 16 GB of memory and an Intel i7-13700H processor. For all experiments, we run 50 independent trials, report the average results and use shaded regions to represent standard deviations. The detailed experimental settings and time comparisons are deferred to Appendix C.

5.1 Cooperative Multi-agent Multi-Armed Bandits

We compare our framework with DRAA [12], IND-BARBAR [1], and IND-FTRL [4] in a multi-agent setting with $V = 10$. Here, IND-BARBAR and IND-FTRL serve as non-cooperative baselines, where each agent runs the algorithm locally without any communication. We do not compare with [32] since the baseline DRAA is an improved version of their method. We present the experimental results in Figure 1, which shows that our BARBAT framework outperforms all baseline methods, reflecting the advantage of collaboration and verifying our theoretical analysis. In addition, when C is increased, the increase in individual regret of our framework is the smallest, which shows that the robustness of our framework is stronger than that of all baseline methods.

5.2 Strongly Observable Graph Bandits

We compare our SOG-BARBAT algorithm with Shannon-FTRL [13] and Tsallis-FTRL [14] using two directed graphs as illustrated in Figure 4 in Appendix C.2. We do not include the Elise [10] algorithm in the experiment since it only works for undirected graphs. The experimental results

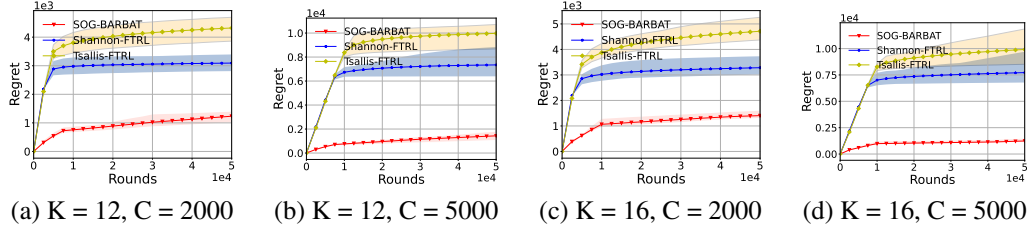


Figure 2: Comparison between SOG-BARBAT, Shannon-FTRL, and Tsallis-FTRL in strongly observable graph bandits.

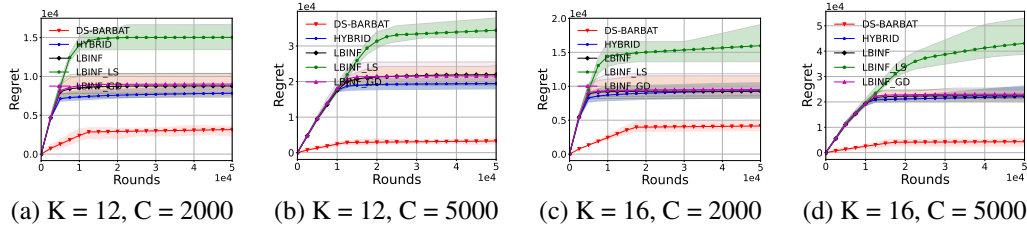


Figure 3: Comparison between DS-BARBAT, HYBRID, LBINF, LBINF_LS and LBINF_GD in d -set semi-bandits.

are presented in Figure 2, showing that our SOG-BARBAT algorithm significantly outperforms all baseline methods and verifying the robustness of our method.

5.3 d -Set Semi-bandits

In d -set semi-bandits, we set $d = 3$ for $K = 12$, and $d = 4$ for $K = 16$. We compare our framework with HYBRID [15], LBINF [16], LBINF_LS [17] and LBINF_GD [17]. As shown in Figure 3, our DS-BARBAT algorithm significantly outperforms all baseline methods.

6 Conclusion

Building on the BARBAR algorithm [1], we propose the BARBAT framework by elaborately designing the epoch lengths N_m and the parameters δ_m . We further extend BARBAT to various corrupted bandit settings, including multi-agent bandits, batched bandits, strongly observable graph bandits and d -set semi-bandits. Our theoretical analysis shows that these algorithms achieve near-optimal regret bounds for adversarially corrupted environments. Compared with FTRL-based approaches, BARBAT and its extensions are more computationally efficient and do not rely on the assumption of a unique optimal action. Moreover, since FTRL-based methods are difficult to parallelize, they are unsuitable for multi-agent and batched settings. These advantages make the BARBAT framework an attractive alternative to FTRL-based algorithms across a wide range of corrupted bandit problems. One future direction is to improve the $\log^2(T)$ dependence in our regret bound to $\log(T)$. Investigating extensions in other bandit settings such as linear bandits is also an interesting future direction.

Acknowledgement

This work was supported by Natural Science Foundation of China (No. 62306116), and in part by the Key Program of National Natural Science Foundation of China (No. 62432007).

References

- [1] Anupam Gupta, Tomer Koren, and Kunal Talwar. Better algorithms for stochastic bandits with adversarial corruptions. In *Conference on Learning Theory*, volume 99, pages 1562–1578. PMLR, 2019.

- [2] Tze Leung Lai and Herbert Robbins. Asymptotically efficient adaptive allocation rules. *Advances in Applied Mathematics*, 6(1):4–22, 1985.
- [3] Peter Auer, Nicolo Cesa-Bianchi, and Paul Fischer. Finite-time analysis of the multiarmed bandit problem. *Machine learning*, 47:235–256, 2002.
- [4] Julian Zimmert and Yevgeny Seldin. Tsallis-inf: An optimal algorithm for stochastic and adversarial bandits. *Journal of Machine Learning Research*, 22(28):1–49, 2021.
- [5] Shinji Ito. Parameter-free multi-armed bandit algorithms with hybrid data-dependent regret bounds. In *Conference on Learning Theory*, volume 134, pages 2552–2583. PMLR, 2021.
- [6] Tiancheng Jin, Junyan Liu, and Haipeng Luo. Improved best-of-both-worlds guarantees for multi-armed bandits: Ftrl with general regularizers and multiple optimal arms. In *Advances in Neural Information Processing Systems*, volume 36, pages 30918–30978, 2023.
- [7] Taira Tsuchiya, Shinji Ito, and Junya Honda. Stability-penalty-adaptive follow-the-regularized-leader: Sparsity, game-dependency, and best-of-both-worlds. In *Advances in Neural Information Processing Systems*, volume 36, pages 47406–47437, 2023.
- [8] Thodoris Lykouris, Vahab Mirrokni, and Renato Paes Leme. Stochastic bandits robust to adversarial corruptions. In *Proceedings of the 50th Annual ACM SIGACT Symposium on Theory of Computing*, pages 114–122, 2018.
- [9] Junyan Liu, Shuai Li, and Dapeng Li. Cooperative stochastic multi-agent multi-armed bandits robust to adversarial corruptions. *arXiv preprint arXiv:2106.04207*, 2021.
- [10] Shiyin Lu, Guanghui Wang, and Lijun Zhang. Stochastic graphical bandits with adversarial corruptions. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 8749–8757, 2021.
- [11] Xuchuang Wang, Lin Yang, Yu-zhen Janice Chen, Xutong Liu, Mohammad Hajiesmaili, Don Towsley, and John CS Lui. Achieving near-optimal individual regret & low communications in multi-agent bandits. In *The Eleventh International Conference on Learning Representations*, 2023.
- [12] Fatemeh Ghaffari, Xuchuang Wang, Jinhang Zuo, and Mohammad Hajiesmaili. Multi-agent stochastic bandits robust to adversarial corruptions. In *Proceedings of the 7th Annual Learning for Dynamics & Control Conference*, volume 283, pages 12–25, 2025.
- [13] Shinji Ito, Taira Tsuchiya, and Junya Honda. Nearly optimal best-of-both-worlds algorithms for online learning with feedback graphs. In *Advances in Neural Information Processing Systems*, volume 35, pages 28631–28643, 2022.
- [14] Chris Dann, Chen-Yu Wei, and Julian Zimmert. A blackbox approach to best of both worlds in bandits and beyond. In *Conference on Learning Theory*, volume 195, pages 5503–5570. PMLR, 2023.
- [15] Julian Zimmert, Haipeng Luo, and Chen-Yu Wei. Beating stochastic and adversarial semi-bandits optimally and simultaneously. In *International Conference on Machine Learning*, volume 97, pages 7683–7692. PMLR, 2019.
- [16] Shinji Ito. Hybrid regret bounds for combinatorial semi-bandits and adversarial linear bandits. In *Advances in Neural Information Processing Systems*, volume 34, pages 2654–2667, 2021.
- [17] Taira Tsuchiya, Shinji Ito, and Junya Honda. Further adaptive best-of-both-worlds algorithm for combinatorial semi-bandits. In *International Conference on Artificial Intelligence and Statistics*, volume 206, pages 8117–8144. PMLR, 2023.
- [18] Vianney Perchet, Philippe Rigollet, Sylvain Chassang, and Erik Snowberg. Batched bandit problems. In *Conference on Learning Theory*, volume 40, pages 1456–1456. PMLR, 2015.
- [19] Zijun Gao, Yanjun Han, Zhimei Ren, and Zhengqing Zhou. Batched multi-armed bandits problem. In *Advances in Neural Information Processing Systems*, volume 32, pages 503–513, 2019.

- [20] Hossein Esfandiari, Amin Karbasi, Abbas Mehrabian, and Vahab Mirrokni. Regret bounds for batched bandits. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 7340–7348, 2021.
- [21] Eyal Even-Dar, Shie Mannor, Yishay Mansour, and Sridhar Mahadevan. Action elimination and stopping conditions for the multi-armed bandit and reinforcement learning problems. *Journal of Machine Learning Research*, 7(39):1079–1105, 2006.
- [22] Sébastien Bubeck and Aleksandrs Slivkins. The best of both worlds: Stochastic and adversarial bandits. In *Conference on Learning Theory*, volume 23, pages 42.1–42.23. PMLR, 2012.
- [23] Yevgeny Seldin and Aleksandrs Slivkins. One practical algorithm for both stochastic and adversarial bandits. In *International Conference on Machine Learning*, volume 32, pages 1287–1295. PMLR, 2014.
- [24] Peter Auer and Chao-Kai Chiang. An algorithm with nearly optimal pseudo-regret for both stochastic and adversarial bandits. In *Conference on Learning Theory*, volume 49, pages 116–120. PMLR, 2016.
- [25] Chen-Yu Wei and Haipeng Luo. More adaptive algorithms for adversarial bandits. In *Conference on Learning Theory*, volume 75, pages 1263–1291. PMLR, 2018.
- [26] Chloé Rouyer, Dirk van der Hoeven, Nicolò Cesa-Bianchi, and Yevgeny Seldin. A near-optimal best-of-both-worlds algorithm for online learning with feedback graphs. In *Advances in Neural Information Processing Systems*, volume 35, pages 35035–35048, 2022.
- [27] Ronshee Chawla, Daniel Vial, Sanjay Shakkottai, and R Srikant. Collaborative multi-agent heterogeneous multi-armed bandits. In *International Conference on Machine Learning*, volume 202, pages 4189–4217. PMLR, 2023.
- [28] Kelly Zhang, Lucas Janson, and Susan Murphy. Inference for batched bandits. In *Advances in Neural Information Processing Systems*, volume 33, pages 9818–9829, 2020.
- [29] Tianyuan Jin, Pan Xu, Xiaokui Xiao, and Quanquan Gu. Double explore-then-commit: Asymptotic optimality and beyond. In *Conference on Learning Theory*, volume 134, pages 2584–2633. PMLR, 2021.
- [30] Noga Alon, Nicolo Cesa-Bianchi, Claudio Gentile, Shie Mannor, Yishay Mansour, and Ohad Shamir. Nonstochastic multi-armed bandits with graph-structured feedback. *SIAM Journal on Computing*, 46(6):1785–1826, 2017.
- [31] Houshuang Chen, Yuchen He, and Chihao Zhang. On interpolating experts and multi-armed bandits. In *International Conference on Machine Learning*, volume 235, pages 6776–6802. PMLR, 2024.
- [32] Haoyang Liu, Keqin Liu, and Qing Zhao. Learning in a changing world: Restless multiarmed bandit with unknown dynamics. *IEEE Transactions on Information Theory*, 59(3):1902–1916, 2012.
- [33] Devdatt P Dubhashi and Alessandro Panconesi. *Concentration of measure for the analysis of randomized algorithms*. Cambridge University Press, 2009.
- [34] Alina Beygelzimer, John Langford, Lihong Li, Lev Reyzin, and Robert Schapire. Contextual bandit algorithms with supervised learning guarantees. In *International Conference on Artificial Intelligence and Statistics*, volume 15, pages 19–26. PMLR, 2011.
- [35] Noga Alon and Joel H Spencer. *The probabilistic method*. John Wiley & Sons, 2016.
- [36] Paul Erdős and Alfréd Rényi. On the evolution of random graphs. *Publication of the Mathematical Institute of the Hungarian Academy of Sciences*, 5:17–61, 1960.

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [\[Yes\]](#)

Justification: see section 1.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [\[Yes\]](#)

Justification: see Section 6.

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [\[Yes\]](#)

Justification: see Appendix.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: see the pseudo code of algorithms, Section 5 and Appendix.

Guidelines:

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: see supplementary material.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so “No” is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyper-parameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: see the pseudo code of algorithms, Section 5 and Appendix.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: see Section 5.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.

- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: see Section 5.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: I confirm the paper in every respect, with the NeurIPS Code of Ethics.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [NA]

Justification: this work is a theoretical research

Guidelines:

- The answer NA means that there is no societal impact of the work performed.
- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to

generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.

- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [NA]

Justification: the paper poses no such risks.

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [NA]

Justification: the paper does not use existing assets.

Guidelines:

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [NA]

Justification: the paper does not release new assets.

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [NA]

Justification: the paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [NA]

Justification: the paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. Declaration of LLM usage

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigorousness, or originality of the research, declaration is not required.

Answer: [NA]

Justification: the core method development in this research does not involve LLMs as any important, original, or non-standard components.

Guidelines:

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (<https://neurips.cc/Conferences/2025/LLM>) for what should or should not be described.

Contents

A	OODS algorithm for strongly observable graph bandits	21
B	Proof Details	22
B.1	Proof of Theorem 1	22
B.1.1	Notations	22
B.1.2	Lemmas for Proving Theorem 1	22
B.1.3	Proof for Theorem 1	26
B.2	Proof of Theorem 2	28
B.2.1	Notations	28
B.2.2	Lemmas for Proving Theorem 2	28
B.2.3	Proof for Theorem 2	32
B.3	Proof of Theorem 3	34
B.3.1	Notations	34
B.3.2	Lemmas for Proving Theorem 3	34
B.3.3	Proof for Theorem 3	37
B.3.4	Proof for Theorem 4	39
B.4	Proof of Theorem 5	39
B.4.1	Lemmas for Proving Theorem 5	39
B.4.2	Proof for Theorem 5	43
B.5	Proof of Theorem 6	46
B.5.1	Notations	46
B.5.2	Lemmas for Proving Theorem 6	46
B.5.3	Proof for Theorem 6	47
C	Experimental Details	50
C.1	Cooperative Multi-Agent Multi-Armed Bandits	50
C.2	Strongly Observable Graph Bandits	50
C.3	d -Set Semi-bandits	50

A OODS algorithm for strongly observable graph bandits

In this section, we present the OODS algorithm for strongly observable graph bandits. For any graph $G = (V, E)$, the time complexity of the algorithm is $O(|V|^2|E|)$.

Algorithm 6 OODS: Obtain an out-domination Set

```
1: Input: a graph  $G$ .
2: Output: an out-domination set  $D$ .
3: while the graph  $G$  is not empty do
4:   if the graph  $G$  is an acyclic graph then
5:     Find all no-root vertices and add them to the set  $D$ .
6:   Remove all no-root vertices and their out-degree neighbors from the graph  $G$ .
7:   else
8:     Select the vertex with the largest out-degree in the graph  $G$  and add it to the set  $D$ .
9:     Remove the vertex and its out-degree neighbors from the graph  $G$ .
10:  end if
11: end while
```

A “no-root vertex” is defined as a vertex with no incoming edges other than its self-loop. To ensure that the rewards for no-root vertices are observed, OODS pulls these vertices directly. However, in some graphs, there may be no such vertices. In such cases, OODS applies a greedy strategy: it selects the vertex with the highest out-degree and adds it to D . The procedure proceeds as follows: if a cycle is detected in G , the greedy strategy is employed; otherwise, all no-root vertices are added to D . The vertices in D and their out-degree neighbors are then removed from the graph G , and the process repeats until G is empty, ensuring that D forms an out-domination set covering G .

At a high level, the OODS algorithm finds an out-domination set D^m such that pulling the arms $k \in D^m$ allows us to observe the rewards of all arms. The loop iteratively removes arms once they meet the observation requirement. After each removal, the independence number of the remaining graph may decrease, so the required dominating set becomes smaller—thereby reducing the number of pulls allocated to suboptimal arms.

B Proof Details

B.1 Proof of Theorem 1

B.1.1 Notations

We define C_k^m as the sum of corruptions to arm k in epoch m , and let $C_m \triangleq \max_{k \in [K]} C_k^m$.

B.1.2 Lemmas for Proving Theorem 1

Lemma 1. *For the BARBAT algorithm time horizon T , the number of epochs M is at most $\log_2(T)$. In the m -th epoch, the selected arm k_m must satisfy $\Delta_{k_m}^{m-1} = 2^{-(m-1)}$.*

Proof. The length of epoch m is given by $N_m = \lceil K \lambda_m 2^{2(m-1)} \rceil \geq 2^{2(m-1)}$. From the lower bound of N_m , we can complete the first statement. Since $\Delta_k^{m-1} \leftarrow \max\{2^{-(m-1)}, r_*^m - r_k^m\}$, there exists at least one arm that satisfies $\Delta_k^{m-1} = 2^{-(m-1)}$ and all arms satisfy $\Delta_k^{m-1} \leq 2^{-(m-1)}$. Since $r_{k_m}^{m-1} > r_*^{m-1}$, the equality $\Delta_{k_m}^{m-1} = 2^{-(m-1)}$ must hold. $\square$

Lemma 2. *For any epoch m , the length N_m satisfies $N_m \geq \sum_{k \in [K]} n_k^m$.*

Proof. Since $\Delta_k^m = \max\{2^{-m}, r_*^m - r_k^m\} \geq 2^{-m}$, we can get $n_k^m = \lambda_m (\Delta_k^{m-1})^{-2} \leq \lambda_m 2^{2(m-1)}$. Therefore, we have $\sum_{k \in [K]} n_k^m \leq K \lambda_m 2^{2(m-1)} \leq N_m$. $\square$

Lemma 3. *For epoch s and m with $1 \leq s \leq m$, the following inequality holds:*

$$\frac{\lambda_m}{\lambda_s} \leq \left(\frac{7}{6}\right)^{m-s}.$$

Proof. We first show that the function $f(x) = \frac{(x+1.7)\ln(4)+\ln(x)}{(7/6)^x}$ is strictly decreasing for $x \geq 5$. Notice that the derivative function

$$f'(x) = \frac{(\ln(4) + 1/x) - ((x+1.7)\ln(4) + \ln(x)) \ln(7/6)}{(7/6)^x}$$

is monotonically decreasing and $f'(5) < 0$, thus we have $f'(x) < 0$ for $x \geq 5$, which indicates that $f(x)$ is strictly decreasing. Since $K \geq 2$, we can get

$$\begin{aligned} \frac{\lambda_m}{\lambda_s} &= \frac{\ln(4K^2 \ln(K)(m+4)2^{2(m+4)})}{\ln(4K^2 \ln(K)(s+4)2^{2(s+4)})} \\ &= \frac{\ln(4K^2 \ln(K)) + \ln(m+4) + (m+4)\ln(4)}{\ln(4K^2 \ln(K)) + \ln(s+4) + (s+4)\ln(4)} \\ &< \frac{1.7 \cdot \ln(4) + \ln(m+4) + (m+4)\ln(4)}{1.7 \cdot \ln(4) + \ln(s+4) + (s+4)\ln(4)} \\ &= \frac{f(m+4)}{f(s+4)} \left(\frac{7}{6}\right)^{m-s} < \left(\frac{7}{6}\right)^{m-s} \end{aligned}$$

where we use the monotonicity of $f(x)$ and the fact that $K \geq 2$. $\square$

Lemma 4. *For any epoch m , the following inequality holds:*

$$\sum_{s=1}^m \lambda_s \leq 2^8(m^2 + m(10 + 3\ln(K))).$$

Proof. Given the function $f(x) = 2x(1 - \ln(2)) - \ln(x+4) + 7 - 8\ln(2)$. Notice that the derivative function as $f'(x) = 2 - 2\ln(2) - \frac{1}{x+4} > 0$ for all $x \geq 1$, which means that $f(x)$ is strictly increasing

for $x \geq 1$. Since $f(x) \geq f(1) \geq 0$, we can get the inequality as $2x + 7 \geq 2(x + 4) \ln(2) + \ln(x + 4)$ for all $x \geq 1$, then have

$$\begin{aligned} \sum_{s=1}^m \lambda_s &= \sum_{s=1}^m 2^8 (\ln(4K^2 \ln(K)(s+4)2^{2(s+4)})) \\ &= \sum_{s=1}^m 2^8 (2(s+4) \ln(2) + \ln(s+4) + \ln(4K^2 \ln(K))) \\ &\leq \sum_{s=1}^m 2^8 (2s + 7 + \ln(4K^3)) \\ &= 2^8 (m^2 + 8m + m \ln(4K^3)) \\ &\leq 2^8 (m^2 + m(10 + 3 \ln(K))). \end{aligned}$$

□

Lemma 5. For any fixed k, m and β_m , Algorithm 1 satisfies

$$\Pr \left[|r_k^m - \mu_k| \geq \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} + \frac{2C_m}{N_m} \right] \leq \beta_m.$$

Proof. The proof of Lemma 5 mainly follows the proof of Lemma 4 in [1]. We only consider the randomness in epoch m and condition on all random variables before epoch m . In epoch m , the agent pulls arm k with probability $p_m(k) = \tilde{n}_k^m / N_m$.

For ease of analysis, we set an indicator variable Y_k^t , which determines whether the agent updates the corrupted reward $\tilde{r}_{I_t}^t$ into the total reward $S_{I_t}^m$ at step t . We define the corruption at step t on arm k as $C_k^t := \tilde{r}_k^t - r_k^t$. Let $E_m := [T_{m-1} + 1, \dots, T_m]$ represent the N_m time-steps for epoch m . Since $r_k^m = \min \{S_k^m / \tilde{n}_k^m, 1\}$, we can obtain

$$r_k^m \leq \frac{S_k^m}{\tilde{n}_k^m} = \frac{1}{\tilde{n}_k^m} \sum_{t \in E_m} Y_k^t (r_k^t + C_k^t).$$

We can divide the sum into two components:

$$A_k^m = \sum_{t \in E_m} Y_k^t r_k^t, \quad B_k^m = \sum_{t \in E_m} Y_k^t C_k^t.$$

For the previous component A_k^m , notice that r_k^t is independently drawn from a $[0, 1]$ -valued distribution with mean μ_k , and Y_k^t is independently drawn from a Bernoulli distribution with mean $q_k^m := \tilde{n}_k^m / N_m$. Therefore, we have

$$\mathbb{E}[A_k^m] = N_m q_k^m \mathbb{E}[r_k^t] = \tilde{n}_k^m \mu_k \leq \tilde{n}_k^m.$$

By applying the Chernoff-Hoeffding inequality (Theorem 1.1 in [33]), we can get

$$\Pr \left[\left| \frac{A_k^m}{\tilde{n}_k^m} - \mu_k \right| \geq \sqrt{\frac{3 \ln(4/\beta_m)}{\tilde{n}_k^m}} \right] \leq \frac{\beta_m}{2}. \quad (2)$$

For analyzing the latter component B_k^m , we define a martingale difference sequence $X_1, \dots, X_T$, where $X_t = (Y_k^t - q_k^m) C_k^t$ for all t , with respect to the historical information $\{\mathcal{F}\}_{t=1}^T$. Since the corruption C_k^t is deterministic when conditioned on $\mathcal{F}_{t-1}$ and since $\mathbb{E}[Y_k^t | \mathcal{F}_{t-1}] = q_k^m$, we can get

$$\mathbb{E}[X_t | \mathcal{F}_{t-1}] = \mathbb{E}[Y_k^t - q_k^m | \mathcal{F}_{t-1}] C_k^t = 0.$$

Additionally, we have $|X_t| \leq 1$ for all t , and the predictable quadratic variation of this martingale can be bounded as follows:

$$\sum_{t \in E_m} \mathbb{E}[(X_t)^2 | \mathcal{F}_{t-1}] \leq \sum_{t \in E_m} |C_k^t| \text{Var}(Y_k^t) \leq q_k^m \sum_{t \in E_m} |C_k^t|.$$

By Freedman concentration inequality (Theorem 1 in [34]), with probability at least $1 - \beta_m/4$ we have

$$B_k^m \leq q_k^m \sum_{t \in E_m} C_k^t + \sum_{t \in E_m} \mathbb{E}[(X_t)^2 | \mathcal{F}_{t-1}] + \ln(4/\beta_m) \leq 2q_k^m \sum_{t \in E_m} |C_k^t| + \ln(4/\beta_m).$$

Since $q_k^m = \tilde{n}_k^m / N_m$, $\sum_{t \in E_m} |C_k^t| \leq C_m$ and $n_k^m \geq \lambda_m \geq 16 \ln(4/\beta_m)$, with probability at least $1 - \beta_m/4$ the following inequality holds:

$$\frac{B_k^m}{\tilde{n}_k^m} \leq \sqrt{\frac{\ln(4/\beta_m)}{16\tilde{n}_k^m}} + \frac{2C_m}{N_m}.$$

Similarly, with probability at least $1 - \beta_m/4$ the following inequality holds:

$$-\frac{B_k^m}{\tilde{n}_k^m} \leq \sqrt{\frac{\ln(4/\beta_m)}{16\tilde{n}_k^m}} + \frac{2C_m}{N_m}.$$

Thus we have

$$\Pr \left[\left| \frac{B_k^m}{\tilde{n}_k^m} \right| \geq \sqrt{\frac{\ln(4/\beta_m)}{16\tilde{n}_k^m}} + \frac{2C_m}{N_m} \right] \leq \frac{\beta_m}{2}. \quad (3)$$

Combine Eq. (2) and Eq. (3), we complete the proof. $\square$

We define an event $\mathcal{E}_m$ for epoch m as follows:

$$\mathcal{E}_m \triangleq \left\{ \forall k : |r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} + \frac{2C_m}{N_m} \right\}.$$

Then we can establish a lower bound on the probability of the event $\mathcal{E}_m$ occurring by the following lemma.

Lemma 6. *For any epoch m , event $\mathcal{E}_m$ holds with probability at least $1 - \delta_m$. We also have $1/\delta_m \geq N_m$.*

Proof. By Lemma 5, we can get

$$\Pr \left[|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} + \frac{2C_m}{N_m} \right] \leq \beta_m = \frac{\delta_m}{K}.$$

A union bound over the K arms indicates that the success probability of event $\mathcal{E}_m$ is at least $1 - \delta_m$.

Since $m \geq 1$ and $K \geq 2$, then we can get

$$\begin{aligned} N_m &= K 2^{2(m-1)} \lambda_m \\ &= K 2^{2(m+3)} \ln((m+4) 2^{2(m+5)} K^2 \ln(K)) \\ &\leq K 2^{2(m+3)} (\ln(m+4) + 2(m+5) \ln(2) + \ln(K^3)) \\ &\leq K 2^{2(m+3)} ((m+4) \ln(K) + 2(m+5) \ln(K) + 3 \ln(K)) \\ &\leq K 2^{2(m+3)} (4m + 16) \ln(K) \\ &= K 2^{2(m+4)} ((m+4) \ln(K)) = 1/\delta_m. \end{aligned}$$

$\square$

Now we can define the offset level D_m for each epoch m :

$$D_m = \begin{cases} 2C_m & \text{when } \mathcal{E}_m \text{ occurs} \\ N_m & \text{when } \mathcal{E}_m \text{ does not occur} \end{cases}.$$

Since we always have $|r_k^m - \mu_k| \leq 1$, thus the following inequality always holds, regardless of whether event $\mathcal{E}_m$ happens:

$$|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} + \frac{D_m}{N_m}.$$

By the definition of D_m , we have

$$\Pr[D_m = 2C_m] \geq 1 - \delta_m \quad \text{and} \quad \Pr[D_m = N_m] \leq \delta_m.$$

Next, we will bound the estimated gap Δ_k^m . To start, we define the discounted offset rate as

$$\rho_m := \sum_{s=1}^m \frac{D_s}{8^{m-s} N_s}.$$

Then we have the following lemma.

Lemma 7. *For all epochs m and arms k , we can have*

$$\frac{4\Delta_k}{7} - \frac{3}{2}2^{-m} - 6\rho_m \leq \Delta_k^m \leq \frac{8\Delta_k}{7} + 2^{-(m-1)} + 2\rho_m.$$

Proof. Since $|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} + \frac{D_m}{N_m}$, we have

$$-\frac{D_m}{N_m} - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \leq r_k^m - \mu_k \leq \frac{D_m}{N_m} + \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}}.$$

Additionally, since

$$\begin{aligned} r_*^m &\leq \max_k \left\{ \mu_k + \frac{D_m}{N_m} + \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \right\} \leq \mu_{k^*} + \frac{D_m}{N_m}, \\ r_*^m &= \max_k \left\{ r_k^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \right\} \geq r_{k^*}^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_{k^*}^m}} \geq \mu_{k^*} - 2\sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_{k^*}^m}} - \frac{D_m}{N_m}, \end{aligned}$$

we can get

$$-\frac{D_m}{N_m} - 2\sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_{k^*}^m}} \leq r_*^m - \mu_{k^*} \leq \frac{D_m}{N_m}.$$

According to Algorithm 1 and Lemma 2, we have $\tilde{n}_k^m \geq n_k^m$ for all arms k . Then we have the following inequality for all $k \in [K]$:

$$\sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \leq \sqrt{\frac{4 \ln(4/\beta_m)}{n_k^m}} = \frac{\Delta_k^{m-1}}{8}.$$

We now establish the upper bound for Δ_k^m by induction on m .

For the base case $m = 1$, the statement is trivial as $\Delta_k^1 = 1$ for all $k \in [K]$.

Assuming the statement is true for the case of $m - 1$, we have

$$\begin{aligned} \Delta_k^m &= r_*^m - r_k^m = (r_*^m - \mu_{k^*}) + (\mu_{k^*} - \mu_k) + (\mu_k - r_k^m) \\ &\leq \frac{D_m}{N_m} + \Delta_k + \frac{D_m}{N_m} + \frac{1}{8}\Delta_k^{m-1} \\ &\leq \frac{2D_m}{N_m} + \Delta_k + \frac{1}{8} \left(\frac{8\Delta_k}{7} + 2^{-(m-2)} + 2\rho_{m-1} \right) \\ &\leq \frac{8\Delta_k}{7} + 2^{-(m-1)} + 2\rho_m, \end{aligned}$$

Where the second inequality follows from the induction hypothesis.

Next, we provide the lower bound of Δ_k^m . We can get

$$\begin{aligned}\Delta_k^m &= r_*^m - r_k^m = (r_*^m - \mu_{k^*}) + (\mu_{k^*} - \mu_k) + (\mu_k - r_k^m) \\ &\geq -\frac{D_m}{N_m} - \frac{1}{4}\Delta_{k^*}^{m-1} + \Delta_k - \frac{D_m}{N_m} - \frac{1}{8}\Delta_k^{m-1} \\ &\geq -\frac{2D_m}{N_m} + \Delta_k - \frac{3}{8}\left(\frac{8\Delta_k}{7} + 2^{-(m-2)} + 2\rho_{m-1}\right) \\ &\geq \frac{4}{7}\Delta_k - \frac{3}{2}2^{-m} - 6\rho_m.\end{aligned}$$

where the third inequality comes from the upper bound of Δ_k^{m-1} . □

B.1.3 Proof for Theorem 1

We first define the regret R_k^m generated by arm k in epoch m as

$$R_k^m \triangleq \Delta_k \tilde{n}_k^m = \begin{cases} \Delta_k n_k^m & k \neq k_m \\ \Delta_k \tilde{n}_k^m & k = k_m \end{cases}.$$

Then we analyze the regret in following three cases:

Case 1: $0 < \Delta_k \leq 64\rho_{m-1}$.

If $k \neq k_m$, then we have

$$R_k^m = \Delta_k n_k^m \leq 64\rho_{m-1} n_k^m.$$

If $k = k_m$, then we have

$$R_k^m = \Delta_k \tilde{n}_{k_m}^m \leq 64\rho_{m-1} N_m.$$

Case 2: $\Delta_k \leq 8 \cdot 2^{-m}$ and $\rho_{m-1} \leq \frac{\Delta_k}{64}$.

If $k \neq k_m$, then we have

$$R_k^m = n_k^m \Delta_k = \lambda_m (\Delta_k^{m-1})^{-2} \Delta_k \leq \lambda_m 2^{2(m-1)} \Delta_k \leq \frac{16\lambda_m}{\Delta_k}.$$

If $k = k_m$, since $\Delta_{k_m}^{m-1} = 2^{-(m-1)}$, we can get:

$$R_k^m = \tilde{n}_{k_m}^m \Delta_{k_m} \leq N_m \Delta_{k_m} = \lceil K\lambda_m 2^{2(m-1)} \rceil \Delta_{k_m} \leq \frac{16K\lambda_m}{\Delta_{k_m}} + \Delta_{k_m} \leq \frac{16K\lambda_m}{\Delta} + 1.$$

Case 3: $\Delta_k > 8 \cdot 2^{-m}$ and $\rho_{m-1} \leq \frac{\Delta_k}{64}$.

By Lemma 7 we have

$$\Delta_k^{m-1} \geq \frac{4}{7}\Delta_k - \frac{3}{2}2^{-m} - \frac{6}{64}\Delta_k \geq \Delta_k \left(\frac{4}{7} - \frac{3}{16} - \frac{6}{64} \right) \geq 0.29\Delta_k.$$

In this case, it is impossible that $k = k_m$ because $\Delta_{k_m}^{m-1} = 2^{-(m-1)} < 0.29 \cdot 8 \cdot 2^{-m} < 0.29\Delta_k$. So we can obtain

$$R_k^m = n_k^m \Delta_k = \lambda_m (\Delta_k^{m-1})^{-2} \Delta_k \leq \frac{\lambda_m}{0.29^2 \Delta_k} \leq \frac{16\lambda_m}{\Delta_k}.$$

We define $\mathcal{A}^m \triangleq \{k \in [K] \mid 0 < \Delta_k \leq 64\rho_{m-1}\}$ for epoch m . By combining all three cases, we can upper bound the regret as

$$\begin{aligned}
R(T) &= \sum_{m=1}^M \left(\sum_{k \in \mathcal{A}^m} R_k^m + \sum_{k \notin \mathcal{A}^m} R_k^m \right) \\
&\leq \sum_{m=1}^M \left(64\rho_{m-1}N_m + \sum_{k \in \mathcal{A}^m, k \neq k_m} 64\rho_{m-1}n_k^m + \sum_{k \notin \mathcal{A}^m, \Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\
&\quad \left. + \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \mathbb{I}(0 < \Delta_{k_m} \leq 8 \cdot 2^{-m}) \right) \\
&\leq \sum_{m=1}^M \left(64\rho_{m-1}N_m + \sum_{\Delta_k > 0} 64\rho_{m-1}n_k^m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\
&\quad \left. + \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \mathbb{I}(m \leq \log_2(8/\Delta)) \right) \\
&\leq \sum_{m=1}^M \left(128\rho_{m-1}N_m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right) + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16K\lambda_m}{\Delta} + 1 \right)
\end{aligned} \tag{4}$$

where the last inequality uses the fact that $\sum_{\Delta_k > 0} n_k^m \leq N_m$. Notice that we can bound the expectation of the offset level as

$$\mathbb{E}[D_m] = 2(1 - \delta_m)C_m + \delta_m N_m \leq 2C_m + 1$$

and we can bound $\sum_{m=1}^M \rho_{m-1}N_m$ as

$$\begin{aligned}
\sum_{m=1}^M \rho_{m-1}N_m &\leq \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \frac{D_s}{8^{m-1-s}N_s} \right) N_m \\
&\leq 4 \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \frac{(4^{m-1-s} + 1)\lambda_m}{8^{m-1-s}\lambda_s} D_s \right) \\
&= 4 \sum_{m=1}^M \left(\sum_{s=1}^{m-1} ((7/12)^{m-1-s} + (7/48)^{m-1-s}) D_s \right) \\
&= 4 \sum_{s=1}^{M-1} D_s \sum_{m=s+1}^M ((7/12)^{m-1-s} + (7/48)^{m-1-s}) \\
&\leq 4 \left(\sum_{m=1}^{M-1} D_m \right) \sum_{j=0}^{\infty} ((7/12)^j + (7/48)^j) \leq 11 \sum_{m=1}^{M-1} D_m.
\end{aligned} \tag{5}$$

Combining Eq. (4) and Eq. (5), by Lemma 4, we can get

$$\begin{aligned}
R(T) &\leq \sum_{m=1}^{M-1} 1440\mathbb{E}[D_m] + \sum_{m=1}^M \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \\
&\leq \sum_{m=1}^{M-1} 1440\mathbb{E}[D_m] + \sum_{\Delta_k > 0} \frac{2^{12}(\log^2(T) + 3\log(T)\log(30K))}{\Delta_k} \\
&\quad + \frac{2^{12}K(\log^2(8/\Delta) + 3\log(8/\Delta)\log(30K))}{\Delta} + \log(8/\Delta) \\
&\leq \sum_{m=1}^{M-1} 2880C_m + 1440 + \sum_{\Delta_k > 0} \frac{2^{14}\log(T)\log(30KT)}{\Delta_k} \\
&\quad + \frac{2^{14}K\log(8/\Delta)\log(240K/\Delta)}{\Delta} + \log(8/\Delta) \\
&= O\left(C + \sum_{\Delta_k > 0} \frac{\log(T)\log(KT)}{\Delta_k} + \frac{K\log(1/\Delta)\log(K/\Delta)}{\Delta}\right).
\end{aligned}$$

B.2 Proof of Theorem 2

B.2.1 Notations

We define C_k^m as the sum of corruptions to arm k in epoch m for all agents $v \in [V]$, and let $C_m \triangleq \max_{k \in [K]} C_k^m$.

B.2.2 Lemmas for Proving Theorem 2

Lemma 8. For BARBAT with time horizon T , the number of epochs M is at most $\log(VT)$. In the m -th epoch, the selected arm k_m must satisfy $\Delta_{k_m}^{m-1} = 2^{-(m-1)}$ for all agents $v \in [V]$.

Proof. The length of epoch m is given by $N_m = \lceil K\lambda_m 2^{2(m-1)} \rceil \geq 2^{2(m-1)}/V$. From the lower bound of N_m , we can complete the first statement. Since $\Delta_k^{m-1} \leftarrow \max\{2^{-(m-1)}, r_*^m - r_k^m\}$, there exists at least one arm that satisfies $\Delta_k^{m-1} = 2^{-(m-1)}$ and all arms satisfy $\Delta_k^{m-1} \leq 2^{-(m-1)}$. Since $r_{k_m}^{m-1} > r_*^{m-1}$, the equality $\Delta_{k_m}^{m-1} = 2^{-(m-1)}$ must hold. $\square$

Since the length N_m still satisfies $N_m = \lceil K\lambda_m 2^{2(m-1)} \rceil \geq \sum_{k \in [K]} n_k^m$, Lemma 2 still holds for this setting.

Lemma 9. For epoch s and m with $1 \leq s \leq m$, the following inequality holds:

$$\frac{\lambda_m}{\lambda_s} \leq \left(\frac{7}{6}\right)^{m-s}.$$

Proof. We first show that the function $f(x) = \frac{(x+1.7)\ln(4)+\ln(x)}{(7/6)^x}$ is strictly decreasing for $x \geq 5$. Notice that the derivative function

$$f'(x) = \frac{(\ln(4) + 1/x) - ((x+1.7)\ln(4) + \ln(x))\ln(7/6)}{(7/6)^x}$$

is monotonically decreasing and $f'(5) < 0$, thus we have $f'(x) < 0$ for $x \geq 5$, which indicates that $f(x)$ is strictly decreasing. Since $K \geq 2$ and $V \geq 1$, we can get

$$\begin{aligned}
\frac{\lambda_m}{\lambda_s} &= \frac{\ln(4VK^2\ln(VK)(m+4)2^{2(m+4)})}{\ln(4VK^2\ln(VK)(s+4)2^{2(s+4)})} \\
&= \frac{\ln(4VK^2\ln(VK)) + \ln(m+4) + (m+4)\ln(4)}{\ln(4VK^2\ln(VK)) + \ln(s+4) + (s+4)\ln(4)}
\end{aligned}$$

$$\begin{aligned}
&< \frac{1.7 \cdot \ln(4) + \ln(m+4) + (m+4) \ln(4)}{1.7 \cdot \ln(4) + \ln(s+4) + (s+4) \ln(4)} \\
&= \frac{f(m+4)}{f(s+4)} \left(\frac{7}{6}\right)^{m-s} < \left(\frac{7}{6}\right)^{m-s}
\end{aligned}$$

where we use the monotonicity of $f(x)$ and the fact that $K \geq 2$ and $V \geq 1$. $\square$

Lemma 10. For any epoch m , the following inequality holds:

$$\sum_{s=1}^m \lambda_s \leq 2^8(m^2 + m(10 + \ln(VK))).$$

Proof. Given the function $f(x) = 2x(1 - \ln(2)) - \ln(x+4) + 7 - 8 \ln(2)$. Notice that the derivative function as $f'(x) = 2 - 2 \ln(2) - \frac{1}{x+4} > 0$ for all $x \geq 1$, which means that $f(x)$ is strictly increasing for $x \geq 1$. Since $f(x) \geq f(1) \geq 0$, we can get the inequality as $2x + 7 \geq 2(x+4) \ln(2) + \ln(x+4)$ for all $x \geq 1$, then have

$$\begin{aligned}
\sum_{s=1}^m \lambda_s &= \sum_{s=1}^m 2^8(\ln(4VK^2 \ln(VK))(s+4)2^{2(s+4)}) \\
&= \sum_{s=1}^m 2^8(2(s+4) \ln(2) + \ln(s+4) + \ln(4VK^2 \ln(VK))) \\
&\leq \sum_{s=1}^m 2^8(2s + 7 + \ln(4V^2K^3)) \\
&= 2^8(m^2 + 8m + m \ln(4V^2K^3)) \\
&\leq 2^8(m^2 + m(10 + 3 \ln(VK))).
\end{aligned}$$

$\square$

Lemma 11. For any fixed k, m and any $\beta_m \geq 4e^{-V\lambda_m/16}$, Algorithm 2 satisfies

$$\Pr \left[|r_k^m - \mu_k| \geq \sqrt{\frac{4 \ln(4/\beta_m)}{V \tilde{n}_k^m}} + \frac{2C_m}{VN_m} \right] \leq \beta_m.$$

Proof. Since in each epoch m , all agents have the same probability $p_m(k)$ of pulling each arm k . Using the method as Lemma 5, we set an indicator variable $Y_{v,k}^t$, which determines whether the agent v updates the corrupted reward $\tilde{r}_{v,I_t}$ into the total reward S_{v,I_t}^m at step t . We define the corruption at step t on arm k for agent v as $C_{v,k}^t := \tilde{r}_{v,k}^t - r_{v,k}^t$. Let $E_m := [T_{m-1} + 1, \dots, T_m]$ represent the N_m time-steps for epoch m . Since $r_k^m = \min\{\sum_{v \in [V]} S_{v,k}^m / (V \tilde{n}_k^m), 1\}$, we can obtain

$$r_k^m \leq \sum_{v \in [V]} \frac{S_{v,k}^m}{V \tilde{n}_k^m} = \frac{1}{V \tilde{n}_k^m} \sum_{t \in E_m} \sum_{v \in [V]} Y_{v,k}^t (r_{v,k}^t + C_{v,k}^t).$$

We can divide the sum to two components:

$$A_k^m = \sum_{t \in E_m} \sum_{v \in [V]} Y_{v,k}^t r_{v,k}^t, \quad B_k^m = \sum_{t \in E_m} \sum_{v \in [V]} Y_{v,k}^t C_{v,k}^t.$$

For the previous component A_k^m , notice that r_k^t is dependently drawn from an unknown distribution with mean μ_k , and $Y_{v,k}^t$ is dependently drawn from a Bernoulli distribution with mean $q_k^m := \tilde{n}_k^m / N_m$. Therefore, we have

$$\mathbb{E}[A_k^m] = VN_m q_k^m \mathbb{E}[r_k^t] = V \tilde{n}_k^m \mu_k \leq V \tilde{n}_k^m.$$

By applying the Chernoff-Hoeffding inequality (Theorem 1.1 in [33]), we can get

$$\Pr \left[\left| \frac{A_k^m}{V \tilde{n}_k^m} - \mu_k \right| \geq \sqrt{\frac{3 \ln(4/\beta_m)}{V \tilde{n}_k^m}} \right] \leq \frac{\beta_m}{2}. \quad (6)$$

For the latter component B_k^m , we need to define a martingale difference sequence $X_i^1, \dots, X_i^T$, where $X_i^t = (Y_{v,k}^t - q_k^m)C_{v,k}^t$ for all t , with respect to the historical information $\{\mathcal{F}\}_{t=1}^T$. Since the corruption $C_{v,k}^t$ becomes a deterministic value when conditioned on $\mathcal{F}_{t-1}$ and $\mathbb{E}[Y_{v,k}^t | \mathcal{F}_{t-1}] = q_k^m$, we can get

$$\mathbb{E}[X_i^t | \mathcal{F}_{t-1}] = \mathbb{E}[Y_{v,k}^t - q_k^m | \mathcal{F}_{t-1}] C_{v,k}^t = 0.$$

Additionally, we have $|X_i^t| \leq 1$ for all t and all $v \in [V]$, and the predictable quadratic variation of this martingale can be bounded as follows:

$$\text{Var} = \sum_{t \in E_m} \sum_{v \in [V]} \mathbb{E}[(X_i^t)^2 | \mathcal{F}_{t-1}] \leq \sum_{t \in E_m} \sum_{v \in [V]} |C_{v,k}^t| \text{Var}(Y_{v,k}^t) \leq q_k^m \sum_{t \in E_m} \sum_{v \in [V]} |C_{v,k}^t|.$$

By applying the concentration inequality for martingales (Theorem 1 in [34]), with probability at least $1 - \frac{\beta_m}{4}$, we have

$$B_k^m \leq q_k^m \sum_{t \in E_m} \sum_{v \in [V]} C_{v,k}^t + \text{Var} + \ln(4/\beta_m) \leq 2q_k^m \sum_{t \in E_m} \sum_{v \in [V]} |C_{v,k}^t| + \ln(4/\beta_m).$$

Since $q_k^m = \tilde{n}_k^m / N_m$, $\sum_{t \in E_m} \sum_{v \in [V]} |C_{v,k}^t| \leq C_m$ and $n_k^m \geq \lambda_m \geq 16 \ln(4/\beta_m) / V$, with probability at least $1 - \frac{\beta_m}{4}$, we can get the following inequality:

$$\frac{B_k^m}{V \tilde{n}_k^m} \leq \sqrt{\frac{\ln(4/\beta_m)}{16V \tilde{n}_k^m}} + \frac{2C_m}{V \tilde{n}_k^m}.$$

Similarly, $-\frac{B_k^m}{V \tilde{n}_k^m}$ also meets this bound with probability $1 - \beta/4$. Therefore, we have

$$\Pr \left[\left| \frac{B_k^m}{V \tilde{n}_k^m} \right| \geq \sqrt{\frac{\ln(4/\beta_m)}{16V \tilde{n}_k^m}} + \frac{2C_m}{V N_m} \right] \leq \frac{\beta_m}{2}. \quad (7)$$

Combine Eq. 6 and Eq. 7, we complete the proof. $\square$

We also define an event $\mathcal{E}_m$ for epoch m as follows:

$$\mathcal{E}_m \triangleq \left\{ \forall k : |r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{V \tilde{n}_k^m}} + \frac{2C_m}{V N_m} \right\}.$$

Lemma 12. *For any epoch m , event $\mathcal{E}_m$ holds with probability at least $1 - \delta_m$. And after rigorous calculation, we have $1/\delta_m \geq V N_m$.*

Proof. By Lemma 11, we can get

$$\Pr \left[|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{V \tilde{n}_k^m}} + \frac{2C_m}{V N_m} \right] \leq 2\beta_m = \frac{\delta_m}{VK}.$$

A union bound over the V agents and the K arms conclude the proof.

Since $m \geq 1$, $V \geq 1$ and $K \geq 2$, then we can get

$$\begin{aligned} V N_m &= K V 2^{2(m-1)} \lambda_m \\ &= K 2^{2(m+3)} \ln((m+4) 2^{2(m+5)} V K^2 \ln(K)) \\ &\leq K 2^{2(m+3)} (\ln(m+4) + 2(m+5) \ln(2) + \ln(V K^3)) \\ &\leq K 2^{2(m+4)} ((m+4) \ln(V K)) \\ &\leq 1/\delta_m. \end{aligned}$$

$\square$

As mentioned before, for each epoch m , to unify the varying bounds depending on the occurrence of event $\mathcal{E}_m$, we also define the offset level

$$D_m = \begin{cases} 2C_m & \text{when } \mathcal{E}_m \text{ occurs} \\ VN_m & \text{when } \mathcal{E}_m \text{ does not occur} \end{cases}.$$

This way we can always guarantee the following inequality:

$$|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_k^m}} + \frac{D_m}{VN_m}.$$

By the definition of D_m , we have

$$\Pr[D_m = 2C_m] \geq 1 - \delta_m \quad \text{and} \quad \Pr[D_m = N_m] \leq \delta_m.$$

Next, we will bound the estimated gap Δ_k^m . To start, we define the discounted offset rate as

$$\rho_m := \sum_{s=1}^m \frac{D_s}{8^{m-s}VN_s}.$$

Then we have the following lemma.

Lemma 13. *For all epochs m and arms k , we can have*

$$\frac{4}{7}\Delta_k - \frac{3}{4}2^{-m} - 6\rho_m \leq \Delta_k^m \leq \frac{8\Delta_k}{7} + 2^{-(m-1)} + 2\rho_m.$$

Proof. Since $|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_k^m}} + \frac{D_m}{VN_m}$, we have

$$-\frac{D_m}{VN_m} - \sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_k^m}} \leq r_k^m - \mu_k \leq \frac{D_m}{VN_m} + \sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_k^m}}.$$

Additionally, since

$$\begin{aligned} r_*^m &\leq \max_k \left\{ \mu_k + \frac{D_m}{VN_m} + \sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_k^m}} - \sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_k^m}} \right\} \leq \mu_{k^*} + \frac{D_m}{VN_m}, \\ r_*^m &= \max_k \left\{ r_k^m - \sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_k^m}} \right\} \geq r_{k^*}^m - \sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_{k^*}^m}} \geq \mu_{k^*} - 2\sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_{k^*}^m}} - \frac{D_m}{VN_m}, \end{aligned}$$

we can get

$$-\frac{D_m}{VN_m} - 2\sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_{k^*}^m}} \leq r_*^m - \mu_{k^*} \leq \frac{D_m}{VN_m}.$$

According to Algorithm 1 and Lemma 2, we have $\tilde{n}_k^m \geq n_k^m$ for all arms k . Then we have the following inequality for all $k \in [K]$:

$$\sqrt{\frac{4 \ln(4/\beta_m)}{V\tilde{n}_k^m}} \leq \sqrt{\frac{4 \ln(4/\beta_m)}{Vn_k^m}} = \frac{\Delta_k^{m-1}}{8}.$$

We now establish the upper bound for Δ_k^m by induction on m .

For the base case $m = 1$, the statement is trivial as $\Delta_k^1 = 1$ for all $k \in [K]$.

Assuming the statement is true for the case of $m - 1$, we have

$$\begin{aligned} \Delta_k^m &= r_*^m - r_k^m = (r_*^m - \mu_{k^*}) + (\mu_{k^*} - \mu_k) + (\mu_k - r_k^m) \\ &\leq \frac{D_m}{VN_m} + \Delta_k + \frac{D_m}{VN_m} + \frac{1}{8}\Delta_k^{m-1} \\ &\leq \frac{2D_m}{VN_m} + \Delta_k + \frac{1}{8} \left(\frac{8\Delta_k}{7} + 2^{-(m-2)} + 2\rho_{m-1} \right) \\ &\leq \frac{8\Delta_k}{7} + 2^{-(m-1)} + 2\rho_m, \end{aligned}$$

Where the second inequality follows from the induction hypothesis.

Next, we provide the lower bound of Δ_k^m . We can get

$$\begin{aligned}\Delta_k^m &= r_*^m - r_k^m = (r_*^m - \mu_{k^*}) + (\mu_{k^*} - \mu_k) + (\mu_k - r_k^m) \\ &\geq -\frac{D_m}{VN_m} - \frac{1}{4}\Delta_{k^*}^{m-1} + \Delta_k - \frac{D_m}{VN_m} - \frac{1}{8}\Delta_k^{m-1} \\ &\geq -\frac{2D_m}{VN_m} + \Delta_k - \frac{3}{8}\left(\frac{8\Delta_k}{7} + 2^{-(m-2)} + 2\rho_{m-1}\right) \\ &\geq \frac{4}{7}\Delta_k - \frac{3}{2}2^{-m} - 6\rho_m.\end{aligned}$$

where the third inequality comes from the upper bound of Δ_k^{m-1} . $\square$

We only introduces a small change into the parameter λ_m , by simple calculation, Lemma 3 still holds.

B.2.3 Proof for Theorem 2

We first define the regret R_k^m generated by arm k in epoch m for agent v as

$$R_{v,k}^m \triangleq \Delta_k \tilde{n}_{v,k}^m = \begin{cases} \Delta_k n_k^m & k \neq k_m \\ \Delta_k \tilde{n}_k^m & k = k_m \end{cases}.$$

Then we analyze the regret in following three cases:

Case 1: $0 < \Delta_k \leq 64\rho_{m-1}$.

If $k \neq k_m$, then we have

$$R_{v,k}^m = \Delta_k n_k^m \leq 64\rho_{m-1} n_k^m.$$

If $k = k_m$, then we have

$$R_{v,k}^m = \Delta_k \tilde{n}_{k_m}^m \leq 64\rho_{m-1} N_m.$$

Case 2: $\Delta_k \leq 8 \cdot 2^{-m}$ and $\rho_{m-1} \leq \frac{\Delta_k}{64}$.

If $k \neq k_m$, then we have

$$R_{v,k}^m = n_k^m \Delta_k = \lambda_m (\Delta_k^{m-1})^{-2} \Delta_k \leq \lambda_m 2^{2(m-1)} \Delta_k \leq \frac{16\lambda_m}{\Delta_k}.$$

If $k = k_m$, since $\Delta_{k_m}^{m-1} = 2^{-(m-1)}$, we can get:

$$R_{v,k}^m = \tilde{n}_{k_m}^m \Delta_{k_m} \leq N_m \Delta_{k_m} = \lceil K\lambda_m 2^{2(m-1)} \rceil \Delta_{k_m} \leq \frac{16K\lambda_m}{\Delta_{k_m}} + \Delta_{k_m} \leq \frac{16K\lambda_m}{\Delta} + 1.$$

Case 3: $\Delta_k > 8 \cdot 2^{-m}$ and $\rho_{m-1} \leq \frac{\Delta_k}{64}$.

By Lemma 7 we have

$$\Delta_k^{m-1} \geq \frac{4}{7}\Delta_k - \frac{3}{2}2^{-m} - \frac{6}{64}\Delta_k \geq \Delta_k \left(\frac{4}{7} - \frac{3}{16} - \frac{6}{64} \right) \geq 0.29\Delta_k.$$

In this case, it is impossible that $k = k_m$ because $\Delta_{k_m}^{m-1} = 2^{-(m-1)} < 0.29 \cdot 8 \cdot 2^{-m} < 0.29\Delta_k$. So we can obtain

$$R_{v,k}^m = n_k^m \Delta_k = \lambda_m (\Delta_k^{m-1})^{-2} \Delta_k \leq \frac{\lambda_m}{0.29^2 \Delta_k} \leq \frac{16\lambda_m}{\Delta_k}.$$

We define $\mathcal{A}^m \triangleq \{k \in [K] \mid 0 < \Delta_k \leq 64\rho_{m-1}\}$ for epoch m . By combining all three cases, we can upper bound the regret for agent v as

$$\begin{aligned}
R(T) &= \sum_{m=1}^M \left(\sum_{k \in \mathcal{A}^m} R_k^m + \sum_{k \notin \mathcal{A}^m} R_k^m \right) \\
&\leq \sum_{m=1}^M \left(64\rho_{m-1}N_m + \sum_{k \in \mathcal{A}^m, k \neq k_m} 64\rho_{m-1}n_k^m + \sum_{k \notin \mathcal{A}^m, \Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\
&\quad \left. + \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \mathbb{I}(0 < \Delta_{k_m} \leq 8 \cdot 2^{-m}) \right) \\
&\leq \sum_{m=1}^M \left(64\rho_{m-1}N_m + \sum_{\Delta_k > 0} 64\rho_{m-1}n_k^m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\
&\quad \left. + \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \mathbb{I}(m \leq \log_2(8/\Delta)) \right) \\
&\leq \sum_{m=1}^M \left(128\rho_{m-1}N_m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right) + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16K\lambda_m}{\Delta} + 1 \right)
\end{aligned} \tag{8}$$

where the last inequality uses the fact that $\sum_{\Delta_k > 0} n_k^m \leq N_m$. Notice that we can bound the expectation of the offset level as

$$\mathbb{E}[D_m] = 2(1 - \delta_m)C_m + \delta_m N_m \leq 2C_m + 1$$

and we can bound $\sum_{m=1}^M \rho_{m-1}N_m$ as

$$\begin{aligned}
\sum_{m=1}^M \rho_{m-1}N_m &\leq \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \frac{D_s}{8^{m-1-s}V N_s} \right) N_m \\
&= \frac{4}{V} \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \frac{(4^{m-1-s} + 1)\lambda_m}{8^{m-1-s}\lambda_s} D_s \right) \\
&= \frac{4}{V} \sum_{m=1}^M \left(\sum_{s=1}^{m-1} ((7/12)^{m-1-s} + (7/48)^{m-1-s}) D_s \right) \\
&= \frac{4}{V} \sum_{s=1}^{M-1} D_s \sum_{m=s+1}^M ((7/12)^{m-1-s} + (7/48)^{m-1-s}) \\
&\leq \frac{4}{V} \left(\sum_{m=1}^{M-1} D_m \right) \sum_{j=0}^{\infty} ((7/12)^j + (7/48)^j) \leq \frac{11}{V} \sum_{m=1}^{M-1} D_m.
\end{aligned} \tag{9}$$

Combining Eq. (8) and Eq. (9), by Lemma 10, we can get

$$\begin{aligned}
R_v(T) &\leq \sum_{m=1}^{M-1} 1440\mathbb{E}[D_m] + \sum_{m=1}^M \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \\
&\leq \sum_{m=1}^{M-1} 1440\mathbb{E}[D_m] + \sum_{\Delta_k > 0} \frac{2^{12}(\log^2(VT) + 3\log(VT)\log(30VK))}{V\Delta_k} \\
&\quad + \frac{2^{12}K(\log^2(8/\Delta) + 3\log(8/\Delta)\log(30VK))}{V\Delta} + \log(8/\Delta) \\
&\leq \sum_{m=1}^{M-1} 2880 \frac{C_m}{V} + 1440 + \sum_{\Delta_k > 0} \frac{2^{14}\log(VT)\log(30VK)}{V\Delta_k} \\
&\quad + \frac{2^{14}K\log(8/\Delta)\log(240VK/\Delta)}{V\Delta} + \log(8/\Delta) \\
&= O\left(\frac{C}{V} + \sum_{\Delta_k > 0} \frac{\log(T)\log(VKT)}{V\Delta_k} + \frac{K\log(1/\Delta)\log(VK/\Delta)}{V\Delta}\right).
\end{aligned}$$

So the cumulative regret for all agents as

$$R(T) = O\left(C + \sum_{\Delta_k > 0} \frac{\log(VT)\log(VKT)}{\Delta_k} + \frac{K\log(1/\Delta)\log(VK/\Delta)}{\Delta}\right).$$

And each agent only broadcast messages in the end of each epoch, so the communication cost of MA-BARBAT as follows:

$$\text{Cost}(T) = \sum_{v \in [V]} M = O(V \log(VT)).$$

B.3 Proof of Theorem 3

B.3.1 Notations

We define C_k^m as the sum of corruptions to arm k in epoch m , and let $C_m \triangleq \max_{k \in [K]} C_k^m$.

B.3.2 Lemmas for Proving Theorem 3

Lemma 14. *For the BB-BARBAT algorithm time horizon T , the number of epochs $M = L$. In the m -th epoch, the selected arm k_m must satisfy $\Delta_{k_m}^{m-1} = a^{-(m-1)}$.*

Proof. The length of epoch m is given by $N_m = K\lambda_m a^{2(m-1)} \geq a^{2(m-1)}$. From the lower bound of N_m and $a = T^{\frac{1}{2(L+1)}}$, we can complete the first statement. Since $\Delta_k^{m-1} \leftarrow \max\{a^{-(m-1)}, r_*^m - r_k^m\}$, there exists at least one arm that satisfies $\Delta_k^{m-1} = a^{-(m-1)}$ and all arms satisfy $\Delta_k^{m-1} \leq a^{-(m-1)}$. Since $r_{k_m}^{m-1} > r_*^{m-1}$, the equality $\Delta_{k_m}^{m-1} = 2^{-(m-1)}$ must hold. $\square$

Lemma 15. *For any epoch m , the length N_m satisfies $N_m \geq \sum_{k \in [K]} n_k^m$.*

Proof. Since $\Delta_k^m = \max\{a^{-m}, r_*^m - r_k^m\} \geq a^{-m}$, we can get $n_k^m = \lambda_m(\Delta_k^{m-1})^{-2} \leq \lambda_m a^{2(m-1)}$. Therefore, we have $\sum_{k \in [K]} n_k^m \leq K\lambda_m a^{2(m-1)} = N_m$. $\square$

Lemma 16. *For epoch s and m with $1 \leq s \leq m$, the following inequality holds:*

$$\frac{\lambda_m}{\lambda_s} \leq \left(\frac{7}{5}\right)^{m-s}.$$

Proof. We first show that the function $f(x) = \frac{x \ln(a^2) + \ln(x)}{(\frac{7}{5})^x}$ is strictly decreasing for $x \geq 5$, where $a = \max\{T^{\frac{1}{2(L+1)}}, 2\} \geq 2$. Notice that the derivative function

$$f'(x) = \frac{(\ln(a^2) + 1/x) - (x \ln(a^2) + \ln(x)) \ln(\frac{7}{5})}{(\frac{7}{5})^x}$$

is monotonically decreasing and $f'(5) < 0$, thus we have $f'(x) < 0$ for $x \geq 5$, which indicates that $f(x)$ is strictly decreasing. Since $K \geq 2$, we can get

$$\begin{aligned} \frac{\lambda_m}{\lambda_s} &= \frac{\ln(4K^2 \ln(K)(m+4)a^{2(m+4)})}{\ln(4K^2 \ln(K)(s+4)a^{2(s+4)})} \\ &= \frac{\ln(4K^2 \ln(K)) + \ln(m+4) + (m+4) \ln(a^2)}{\ln(4K^2 \ln(K)) + \ln(s+4) + (s+4) \ln(a^2)} \\ &< \frac{\ln(m+4) + (m+4) \ln(a^2)}{\ln(s+4) + (s+4) \ln(a^2)} \\ &= \frac{f(m+4)}{f(s+4)} \left(\frac{7}{5}\right)^{m-s} < \left(\frac{7}{5}\right)^{m-s} \end{aligned}$$

where we use the monotonicity of $f(x)$ and the fact that $K \geq 2$. □

Lemma 17. For any epoch m , the following inequality holds:

$$\sum_{s=1}^m \lambda_s \leq 2a^8 \ln(a)(m^2 + 3m(2 + \ln(K))).$$

Proof. Since $a \geq 2$ and $K \geq 2$, we can have

$$\begin{aligned} \sum_{s=1}^m \lambda_s &= \sum_{s=1}^m a^8 (\ln(4K^2 \ln(aK)(s+4)a^{2(s+4)})) \\ &= \sum_{s=1}^m a^8 (2(s+4) \ln(a) + \ln(s+4) + \ln(4K^2 \ln(aK))) \\ &\leq \sum_{s=1}^m a^8 (2(s+4) \ln(a) + 2(s+1) \ln(a) + 6 \ln(K) \ln(a)) \\ &\leq \sum_{s=1}^m a^8 \ln(a) (4s + 10 + 6 \ln(K)) \\ &= 2a^8 \ln(a)(m^2 + 3m(2 + \ln(K))). \end{aligned}$$

□

We can also guarantee Lemma 5 still holds. As mentioned before, given the definition of an event $\mathcal{E}_m$ as follows:

$$\mathcal{E}_m \triangleq \left\{ \forall k : |r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} + \frac{2C_m}{N_m} \right\}.$$

Then we can establish a lower bound on the probability of the event $\mathcal{E}_m$ occurring by the following lemma.

Lemma 18. For any epoch m , event $\mathcal{E}_m$ holds with probability at least $1 - \delta_m$. We also have $1/\delta_m \geq N_m$.

Proof. By Lemma 5, we can get

$$\Pr \left[|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} + \frac{2C_m}{N_m} \right] \leq 2\beta_m = \frac{\delta_m}{K}.$$

A union bound over the K arms conclude the proof.

Since $m \geq 1$, $K \geq 2$ and $a \geq 2$, then we can get

$$\begin{aligned}
 N_m &= K \lambda_m a^{2(m-1)} \\
 &= K a^{2(m+3)} \ln(4K^2(m+4)a^{2(m+4)} \ln(aK)) \\
 &\leq K a^{2(m+3)} (2(m+4) \ln(a) + \ln(m+4) + \ln(K^2 \ln(aK)) + \ln(4)) \\
 &\leq K a^{2(m+3)} (2(m+4) \ln(aK) + (m+4) \ln(aK) + 3 \ln(aK) + 2 \ln(aK)) \\
 &\leq K a^{2(m+3)} ((4m+16) \ln(aK)) \\
 &= K a^{2(m+4)} ((m+4) \ln(aK)) \\
 &= 1/\delta_m.
 \end{aligned}$$

□

As mentioned before, for each epoch m , to unify the varying bounds depending on the occurrence of event $\mathcal{E}_m$, we define the offset level

$$D_m = \begin{cases} 2C_m & \text{when } \mathcal{E}_m \text{ occurs} \\ N_m & \text{when } \mathcal{E}_m \text{ dose not occur} \end{cases}.$$

This way we can always guarantee the following inequality:

$$|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} + \frac{D_m}{N_m}.$$

It is worth noting that $\Pr[D_m = 2C_m] \geq 1 - \delta_m$ and $\Pr[D_m = N_m] \leq \delta_m$.

Next, we will bound Δ_k^m . To start, we define the discounted offset rate as

$$\rho_m := \sum_{s=1}^m \frac{2^{m-s} D_s}{a^{4(m-s)} N_s}.$$

Lemma 19. *For all epochs m and arms k , we can have*

$$\frac{a^4 - 8}{a^4 - 2} \Delta_k - \frac{3}{2a^2} a^{-m} - 6\rho_m \leq \Delta_k^m \leq \frac{a^4 - 2}{a^4} \Delta_k + a^{-(m-1)} + 2\rho_m.$$

Proof. Since $|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} + \frac{D_m}{N_m}$, we have

$$-\frac{D_m}{N_m} - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \leq r_k^m - \mu_k \leq \frac{D_m}{N_m} + \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}}.$$

Additionally, since

$$\begin{aligned}
 r_*^m &\leq \max_k \left\{ \mu_k + \frac{D_m}{N_m} + \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \right\} \leq \mu_{k^*} + \frac{D_m}{N_m}, \\
 r_*^m &= \max_k \left\{ r_k^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \right\} \geq r_{k^*}^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_{k^*}^m}} \geq \mu_{k^*} - 2\sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_{k^*}^m}} - \frac{D_m}{N_m},
 \end{aligned}$$

we can get

$$-\frac{D_m}{N_m} - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_{k^*}^m}} \leq r_*^m - \mu_{k^*} \leq \frac{D_m}{N_m}.$$

According to Algorithm 1 and Lemma 2, we have $\tilde{n}_k^m \geq n_k^m$ for all arms k . Then we have the following inequality for all $k \in [K]$:

$$\sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \leq \sqrt{\frac{4 \ln(4/\beta_m)}{n_k^m}} = \frac{2\Delta_k^{m-1}}{a^4}.$$

We now establish the upper bound for Δ_k^m by induction on m .

For the base case $m = 1$, the statement is trivial as $\Delta_k^1 = 1$ for all $k \in [K]$.

Assuming the statement is true for the case of $m - 1$, we have

$$\begin{aligned}\Delta_k^m &= r_*^m - r_k^m = (r_*^m - \mu_{k^*}) + (\mu_{k^*} - \mu_k) + (\mu_k - r_k^m) \\ &\leq \frac{D_m}{N_m} + \Delta_k + \frac{D_m}{N_m} + \frac{2}{a^4} \Delta_k^{m-1} \\ &\leq \frac{2D_m}{N_m} + \Delta_k + \frac{2}{a^4} \left(\frac{a^4 \Delta_k}{a^4 - 2} + a^{-(m-2)} + 2\rho_{m-1} \right) \\ &\leq \frac{a^4 \Delta_k}{a^4 - 2} + a^{-(m-1)} + 2\rho_m,\end{aligned}$$

Where the second inequality follows from the induction hypothesis.

Next, we provide the lower bound of Δ_k^m . We can get

$$\begin{aligned}\Delta_k^m &= r_*^m - r_k^m = (r_*^m - \mu_{k^*}) + (\mu_{k^*} - \mu_k) + (\mu_k - r_k^m) \\ &\geq -\frac{D_m}{N_m} - \frac{4}{a^4} \Delta_k^{m-1} + \Delta_k - \frac{D_m}{N_m} - \frac{2}{a^4} \Delta_k^{m-1} \\ &\geq -\frac{2D_m}{N_m} + \Delta_k - \frac{6}{a^4} \left(\frac{a^4 \Delta_k}{a^4 - 2} + a^{-(m-2)} + 2\rho_{m-1} \right) \\ &\geq \frac{a^4 - 8}{a^4 - 2} \Delta_k - \frac{3}{2a^2} a^{-m} - 6\rho_m.\end{aligned}$$

where the third inequality comes from the upper bound of Δ_k^{m-1} . □

B.3.3 Proof for Theorem 3

We first define the regret R_k^m generated by arm k in epoch m as

$$R_k^m \triangleq \Delta_k \tilde{n}_k^m = \begin{cases} \Delta_k n_k^m & k \neq k_m \\ \Delta_k \tilde{n}_k^m & k = k_m \end{cases}.$$

Then we analyze the regret in following three cases:

Case 1: $0 < \Delta_k \leq 64\rho_{m-1}$.

If $k \neq k_m$, then we have

$$R_k^m = \Delta_k n_k^m \leq 64\rho_{m-1} n_k^m.$$

If $k = k_m$, then we have

$$R_k^m = \Delta_k \tilde{n}_{k_m}^m \leq 64\rho_{m-1} N_m.$$

Case 2: $\Delta_k \leq 4 \cdot a^{-(m-1)}$ and $\rho_{m-1} \leq \frac{\Delta_k}{64}$.

If $k \neq k_m$, then we have

$$R_k^m = n_k^m \Delta_k = \lambda_m (\Delta_k^{m-1})^{-2} \Delta_k \leq \lambda_m a^{2(m-1)} \Delta_k \leq \frac{\lambda_m}{\Delta_k}.$$

If $k = k_m$, since $\Delta_{k_m}^{m-1} = 2^{-(m-1)}$, we can get:

$$R_k^m = \tilde{n}_{k_m}^m \Delta_{k_m} \leq N_m \Delta_{k_m} = \lceil K \lambda_m a^{2(m-1)} \rceil \Delta_{k_m} \leq \frac{16K \lambda_m}{\Delta_{k_m}} + \Delta_{k_m} \leq \frac{16K \lambda_m}{\Delta} + 1.$$

Case 3: $\Delta_k > 4 \cdot a^{-(m-1)}$ and $\rho_{m-1} \leq \frac{\Delta_k}{64}$.

By Lemma 7 we have

$$\Delta_k^{m-1} \geq \frac{a^4 - 8}{a^4 - 2} \Delta_k - \frac{3}{2a^2} a^{-m} - \frac{6}{64} \Delta_k \geq \Delta_k \left(1 - \frac{6}{a^4 - 2} - \frac{3}{8a} - \frac{6}{64} \right) \geq 0.29 \Delta_k.$$

In this case, it is impossible that $k = k_m$ because $\Delta_{k_m}^{m-1} = a^{-(m-1)} < 0.29 \cdot 4 \cdot a^{-(m-1)} < 0.29\Delta_k$. So we can obtain

$$R_k^m = n_k^m \Delta_k = \lambda_m (\Delta_k^{m-1})^{-2} \Delta_k \leq \frac{\lambda_m}{0.29^2 \Delta_k} \leq \frac{16\lambda_m}{\Delta_k}.$$

We define $\mathcal{A}^m \triangleq \{k \in [K] \mid 0 < \Delta_k \leq 64\rho_{m-1}\}$ for epoch m . By combining all three cases, we can upper bound the regret as

$$\begin{aligned} R(T) &= \sum_{m=1}^M \left(\sum_{k \in \mathcal{A}^m} R_k^m + \sum_{k \notin \mathcal{A}^m} R_k^m \right) \\ &\leq \sum_{m=1}^M \left(64\rho_{m-1}N_m + \sum_{k \in \mathcal{A}^m, k \neq k_m} 64\rho_{m-1}n_k^m + \sum_{k \notin \mathcal{A}^m, \Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\ &\quad \left. + \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \mathbb{I}(0 < \Delta_{k_m} \leq 4 \cdot a^{-(m-1)}) \right) \\ &\leq \sum_{m=1}^M \left(64\rho_{m-1}N_m + \sum_{\Delta_k > 0} 64\rho_{m-1}n_k^m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\ &\quad \left. + \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \mathbb{I}(m \leq \log_a(4/\Delta) + 1) \right) \\ &\leq \sum_{m=1}^M \left(64\rho_{m-1}N_m + \sum_{\Delta_k > 0} 64\rho_{m-1}n_k^m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\ &\quad \left. + \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \mathbb{I}(m \leq \log_2(8/\Delta)) \right) \\ &\leq \sum_{m=1}^M \left(128\rho_{m-1}N_m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right) + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \end{aligned} \quad (10)$$

where the last inequality uses the fact that $\sum_{\Delta_k > 0} n_k^m \leq N_m$. Notice that we can bound the expectation of the offset level as

$$\mathbb{E}[D_m] = 2(1 - \delta_m)C_m + \delta_m N_m \leq 2C_m + 1$$

and we can bound $\sum_{m=1}^M \rho_{m-1}N_m$ as

$$\begin{aligned} \sum_{m=1}^M \rho_{m-1}N_m &\leq \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \frac{2^{m-1-s} D_s}{a^{4(m-1-s)} N_s} \right) N_m \\ &= a^2 \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \frac{((2a^2)^{m-1-s} + 1)\lambda_m D_s}{a^{4(m-1-s)} \lambda_s} \right) \\ &= a^2 \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \left(\left(\frac{14}{5a^2} \right)^{m-1-s} + \left(\frac{1}{a^4} \right)^{m-1-s} \right) D_s \right) \\ &= a^2 \sum_{s=1}^{M-1} D_s \sum_{m=s+1}^M \left(\frac{14}{5a^2} \right)^{m-1-s} + \left(\frac{1}{a^4} \right)^{m-1-s} \\ &\leq a^2 \left(\sum_{m=1}^{M-1} D_m \right) \sum_{j=0}^{\infty} \left(\frac{14}{5a^2} \right)^j + \left(\frac{1}{a^4} \right)^j \\ &\leq a^2 \left(\frac{5a^2}{5a^2 - 14} + \frac{a^4}{a^4 - 1} \right) \sum_{m=1}^{M-1} D_m \leq \frac{22a^2}{5} \sum_{m=1}^{M-1} D_m. \end{aligned} \quad (11)$$

Combining Eq. (10) and Eq. (11), by Lemma 17, since $a = T^{\frac{1}{2(L+3)}}$ and $M = L$, we can get

$$\begin{aligned}
R(T) &\leq \sum_{m=1}^{M-1} 570a^2 \mathbb{E}[D_m] + \sum_{m=1}^M \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \\
&= \sum_{m=1}^{L-1} 570a^2 \mathbb{E}[D_m] + \sum_{m=1}^L \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \\
&\leq \sum_{m=1}^{L-1} 1140a^2 C_m + 570a^2 + 2^5 a^8 \ln(a) \left(\sum_{\Delta_k > 0} \frac{L^2 + 3L(2 + \log(K))}{\Delta_k} \right. \\
&\quad \left. + \frac{K(\log^2(8/\Delta) + 3\log(8/\Delta)(2 + \log(K)))}{\Delta} \right) + \log_2(8/\Delta) \\
&= O \left(CT^{\frac{1}{L+3}} + T^{\frac{4}{L+3}} \left(\sum_{\Delta_k > 0} \frac{L \log(KT)}{\Delta_k} + \frac{K \log(T) \log(1/\Delta) \log(K/\Delta)}{L\Delta} \right) \right).
\end{aligned}$$

B.3.4 Proof for Theorem 4

Proof. In the batched bandit problem, let the static grids be defined as $0 = t_0 < t_1 < \dots < t_L = T$. According to Lemma 2 in [19], the lower bound for stochastic batched bandits with no corruption are given by:

$$R(C = 0, L) = O \left(K \cdot \max_{j \in [L]} \frac{t_j}{t_{j-1} + 1} \right). \quad (12)$$

For adversarial corruptions, we define an adversary who starts attacking at round 0 and continues until the end of a batch, denoted by t_s for $0 < s < L$. The attack strategy involves setting the rewards of all arms to zero, forcing any algorithm to pull all arms evenly in round $s + 1$, which leads to a regret of approximately $t_s - t_{s-1}$. Therefore, under adversarial corruptions, the lower bound can be expressed as:

$$\begin{aligned}
R(C, L) &= O \left(K \cdot \max_{j \in [L]} \frac{t_j}{t_{j-1} + 1} + C \cdot \max_{j \in [L-1]} \frac{t_{j+1} - t_j}{t_j} \right) \\
&= O \left(Kt_1 + (K + C) \max_{j \in [L-1]} \frac{t_{j+1} - t_j}{t_j} \right) \\
&= O \left(Kt_1 + (K + C) \left(\frac{T}{t_j} \right)^{\frac{1}{L-1}} \right).
\end{aligned} \quad (13)$$

According the formula, we can get the optimal value of $t_1 = T^{\frac{1}{L}} \left(\frac{K(L-1)}{K+C} \right)^{\frac{L-1}{L}}$. Combine equation 13, we can get

$$R(C, L) \geq \Omega \left(T^{\frac{1}{L}} \left(K + C^{1-\frac{1}{L}} \right) \right).$$

□

B.4 Proof of Theorem 5

B.4.1 Lemmas for Proving Theorem 5

By employing the methods described above, we establish that Lemmas 1, 2, 3, and 4 remain valid. In contrast to the standard multi-armed bandit setting, the feedback structure in our model implies that, for each arm k , the expected number of observable pulls $\hat{n}_k^m$ does not necessarily equal the expected number of actual pulls $\tilde{n}_k^m$.

Lemma 20. For any epoch m , all arms $k \neq k_m$ must satisfy $\tilde{n}_k^m \leq n_k^m$ and $\hat{n}_k^m \geq n_k^m$.

Proof. By Algorithm 4, we can easily guarantee that the inequality $\tilde{n}_k^m \leq n_k^m$ holds for all arms $k \neq k_m$. Recalling the setting of strongly observable graph, for each arm k , either it has a self-loop

or all other arms have an edge pointing to it. According to Algorithm 4, we can get the guarantee as follows for each arm $k_j \in [K]$:

$$\sum_{(k_i, k_j) \in E, k_i \neq k_j} \tilde{n}_{k_i}^m + \tilde{n}_{k_j}^m \geq n_{k_j}^m.$$

So for each arm k which has a self-loop, we have the following inequality:

$$\hat{n}_k^m = \sum_{(k_i, k_j) \in E, k_i \neq k_j} \tilde{n}_{k_i}^m + \tilde{n}_{k_j}^m \geq n_k^m.$$

For each arm k which does not have a self-loop, since $\tilde{n}_{k_m}^m \geq 2^{-m} \geq n_k^m$ for all arms $k \neq k_m$, so we complete the proof. $\square$

Same as the proof in Appendix B.1, we only need to change $\tilde{n}_k^m$ to $\hat{n}_k^m$ to obtain the following lemmas.

Lemma 21. For any fixed k, m and β_m , Algorithm 1 satisfies

$$\Pr \left[|r_k^m - \mu_k| \geq \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} + \frac{2C_m}{N_m} \right] \leq \beta_m.$$

We also define an event $\mathcal{E}_m$ for epoch m as follows:

$$\mathcal{E}_m \triangleq \left\{ \forall k : |r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} + \frac{2C_m}{N_m} \right\}.$$

Lemma 22. For any epoch m , event $\mathcal{E}_m$ holds with probability at least $1 - \delta_m$. And after rigorous calculation, we have $1/\delta_m \geq N_m$.

We can also always guarantee the following inequality:

$$|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} + \frac{D_m}{N_m}.$$

It is worth noting that $\Pr[D_m = 2C_m] \geq 1 - \delta_m$ and $\Pr[D_m = N_m] \leq \delta_m$.

Next, we will bound Δ_k^m , which is also the turning point of our proof. To start, we define the discounted offset rate as

$$\rho_m := \sum_{s=1}^m \frac{D_s}{8^{m-s} N_s}.$$

Lemma 23. For all epochs m and arms $k \neq k^*$, we can have

$$\frac{4}{7} \Delta_k - \frac{3}{4} 2^{-m} - 6\rho_m \leq \Delta_k^m \leq \frac{8}{7} \Delta_k + 2^{-(m-1)} + 2\rho_m,$$

and for the optimal arm k^* , we have

$$-\frac{3}{7} \Delta - \frac{3}{4} 2^{-m} - 6\rho_m \leq \Delta_{k^*}^m \leq \frac{1}{7} \Delta + 2^{-(m-1)} + 2\rho_m.$$

Proof. Since $|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} + \frac{D_m}{N_m}$, we have

$$-\frac{D_m}{N_m} - \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} \leq r_k^m - \mu_k \leq \frac{D_m}{N_m} + \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}}.$$

By Lemma 20, we can get $\hat{n}_k^m \geq n_k^m$ for all arms $k \neq k_m$ and $\hat{n}_{k_m}^m \geq \sum_{k \neq k_m} \tilde{n}_k^m$ for arm k_m . Then we have the following inequalities:

$$\forall k \neq k_m : \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} \leq \sqrt{\frac{4 \ln(4/\beta_m)}{n_k^m}} = \frac{\Delta_k^{m-1}}{8},$$

and

$$\sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_{k_m}^m}} \leq \max_{k \neq k_m} \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} = \min_{k \neq k_m} \frac{\Delta_k^{m-1}}{8}.$$

Additionally, given that

$$r_*^m \leq \max_k \left\{ \mu_k + \frac{D_m}{N_m} + \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} - \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} \right\} \leq \mu_{k^*} + \frac{D_m}{N_m},$$

and

$$\begin{aligned} r_*^m &= \max_k \left\{ r_k^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_k^m}} \right\} \\ &\geq r_{k^*}^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\hat{n}_{k^*}^m}} \\ &\geq \mu_{k^*} - \frac{1}{4} \max\{\Delta_{k^*}^{m-1}, \min_{k \neq k_m} \Delta_k^{m-1}\} - \frac{D_m}{N_m} \\ &\geq \mu_{k^*} - \frac{1}{4} \max\{\Delta_{k^*}^{m-1}, \Delta^{m-1}\} - \frac{D_m}{N_m} \end{aligned}$$

It follows that

$$-\frac{D_m}{N_m} - \frac{1}{4} \max\{\Delta_{k^*}^{m-1}, \Delta^{m-1}\} \leq r_*^m - \mu_{k^*} \leq \frac{D_m}{N_m}.$$

We now establish the upper bound for Δ_k^m using induction on epoch m .

For the base case $m = 1$, the statement is trivial as $\Delta_k^1 = 1$ for all $k \in [K]$.

Assuming the statement is true for $m - 1$, for arm $k \neq k^*$, since there are at least two arms: one optimal arm and one sub-optimal arm, we can obtain

$$\min_{k \neq k_m} \Delta_k^{m-1} \leq \max\{\Delta_{k^*}^{m-1}, \Delta^{m-1}\} \leq \frac{8}{7} \Delta + 2^{-(m-1)} + 2\rho_m.$$

Then we have

$$\begin{aligned} \Delta_k^m &= r_*^m - r_k^m = (r_*^m - \mu_*) + (\mu_* - \mu_k) + (\mu_k - r_k^m) \\ &\leq \frac{D_m}{N_m} + \Delta_k + \frac{D_m}{N_m} + \frac{1}{8} \max\{\Delta_{k^*}^{m-1}, \min_{k \neq k_m} \Delta_k^{m-1}\} \\ &\leq \frac{2D_m}{N_m} + \Delta_k + \frac{1}{8} \left(\frac{8 \max\{\Delta_k, \Delta\}}{7} + 2^{-(m-1)} + 2\rho_{m-2} \right) \\ &\leq \frac{8\Delta_k}{7} + 2^{-(m-1)} + 2\rho_m. \end{aligned}$$

Where the second inequality follows from the induction hypothesis.

For arm k^* , we have

$$\begin{aligned} \Delta_{k^*}^m &= r_*^m - r_{k^*}^m = (r_*^m - \mu_*) + (\mu_* - \mu_{k^*}) + (\mu_{k^*} - r_{k^*}^m) \\ &\leq \frac{D_m}{N_m} + \frac{D_m}{N_m} + \frac{1}{8} \max\{\Delta_{k^*}^{m-1}, \min_{k \neq k_m} \Delta_k^{m-1}\} \\ &\leq \frac{2D_m}{N_m} + \frac{1}{8} \left(\frac{8\Delta}{7} + 2^{-(m-1)} + 2\rho_{m-1} \right) \\ &\leq \frac{1}{7} \Delta + 2^{-(m-1)} + 2\rho_m. \end{aligned}$$

Next, we establish the lower bound for Δ_k^m . Specifically, for arm $k \neq k^*$ we demonstrate that

$$\begin{aligned}\Delta_k^m &= r_*^m - r_k^m = (r_*^m - \mu_*) + (\mu_* - \mu_k) + (\mu_k - r_k^m) \\ &\geq -\frac{D_m}{N_m} - \frac{1}{4} \max\{\Delta_{k^*}^{m-1}, \Delta^{k-1}\} + \Delta_k - \frac{D_m}{N_m} - \frac{1}{8} \Delta_k^{m-1} \\ &\geq -\frac{2D_m}{N_m} + \Delta_k - \frac{3}{8} \left(\frac{8 \max\{\Delta_k, \Delta\}}{7} + 2^{-(m-2)} + 2\rho_{m-1} \right) \\ &\geq \frac{4}{7} \Delta_k - \frac{3}{2} 2^{-m} - 6\rho_m.\end{aligned}$$

where the third inequality comes from the upper bound of Δ_k^{m-1} .

For arm k^* , we have

$$\begin{aligned}\Delta_{k^*}^m &= r_*^m - r_{k^*}^m = (r_*^m - \mu_*) + (\mu_* - \mu_{k^*}) + (\mu_{k^*} - r_{k^*}^m) \\ &\geq -\frac{D_m}{N_m} - \frac{1}{4} \max\{\Delta_{k^*}^{m-1}, \Delta^{k-1}\} - \frac{D_m}{N_m} - \frac{1}{8} \Delta_{k^*}^{m-1} \\ &\geq -\frac{2D_m}{N_m} - \frac{3}{8} \left(\frac{8\Delta}{7} + 2^{-(m-2)} + 2\rho_{m-1} \right) \\ &\geq -\frac{3}{7} \Delta - \frac{3}{2} 2^{-m} - 6\rho_m.\end{aligned}$$

This proof is complete. $\square$

Lemma 24. *For any strongly observable directed graph G with the independence number α , the obtained out-domination set D must satisfy $|D| \leq \lceil \alpha(1 + 2 \ln(K/\alpha)) \rceil$ by Algorithm 6. Especially, when G is an acyclic graph and undirected graphs, we have $|D| \leq \alpha$.*

Proof. If the graph G is undirected, then in each iteration of the Algorithm 6 we select a vertex and remove its neighbors. The selected vertices are therefore pairwise non-adjacent and form an independent set; hence the resulting out-dominating set D satisfies $|D| \leq \alpha$. The remainder of our analysis focuses on the directed graphs.

Recalling the definition of the no-root vertex, for any strongly observable directed graph G with the independence number α , we can get that if we remove a no-root vertex k and its out-degree neighbors, the remaining graph G' whose independence number is at most $\alpha - 1$. That's because no vertex in graph G' is connected to the vertex k . By the definition of strongly observable directed acyclic graph, we can always get the no-root vertex for the remaining graph, which means that $|D| \leq \alpha$.

Recalling the pseudo-code in Algorithm 6, we denote the loop index as s and initialize $s = 0$. In other words, $G_s = ([V_s], E_s)$ shows the residual graph obtained after s loops of removing vertices. Given any graph $G_s = ([V_s], E_s)$ with no no-root vertices, G_{s+1} is obtained by removing from G_s the vertex i_s with the largest out-degree d_s^+ . Hence,

$$d_s^+ \geq \frac{|E_s|}{|V_s|} \geq \frac{|V_s|}{2\alpha_s} - \frac{1}{2} \geq \frac{|V_s|}{2\alpha} - \frac{1}{2},$$

by Turan's theorem (e.g., [35]), where α_s is the independence number of G_s and $\alpha \geq \alpha_s$. This shows that

$$|V_{s+1}| = |V_s| - d_s^+ \leq |V_s| \left(1 - \frac{1}{2\alpha}\right) \leq |V_s| e^{-s/2\alpha}.$$

Iterating, we obtain $|V_s| \leq K e^{-s/2\alpha}$. We define the graph $G_{s_0} = ([V_{s_0}], E_{s_0})$ with the independence number α_{s_0} as the final residual graph has cycles. We can discuss this in two cases:

Case 1: $|V_{s_0}| < \alpha$.

We can get a graph $G_{s_1} = ([V_{s_1}], E_{s_1})$ with $s_1 \leq s_0$, which satisfies $|V_{s_1}| < \alpha$ and $|V_{s_1-1}| \geq \alpha$. Since $V_{s_1-1} \leq K e^{-(s_1-1)/(2\alpha)}$, we have $s_1 - 1 \leq \lceil 2\alpha \ln(K/|V_{s_1-1}|) \rceil \leq \lceil 2\alpha \ln(K/\alpha) \rceil$. So we can get

$$|D| \leq |V_{s_1}| + \lceil 2\alpha \ln(K/\alpha) \rceil + 1 \leq \lceil \alpha(1 + 2 \ln(K/\alpha)) \rceil.$$

Case 2: $|V_{s_0}| \geq \alpha$.

By $V_{s_0} \leq Ke^{-s_0/(2\alpha)}$, we have $s_0 \leq \lceil 2\alpha \ln(K/|V_{s_0}|) \rceil \leq \lceil 2\alpha \ln(K/\alpha) \rceil$. Because G_{s_0} has no cycles and the independence number $\alpha_{s_0} \leq \alpha$, we can get

$$|D| \leq \alpha_{s_0} + \lceil 2\alpha \ln(K/\alpha) \rceil \leq \lceil \alpha(1 + 2\ln(K/\alpha)) \rceil.$$

The proof is complete. $\square$

B.4.2 Proof for Theorem 5

Recalling Lemma 23, for all arms $k \neq k^*$, we have

$$\frac{4}{7}\Delta_k - \frac{3}{4}2^{-m} - 6\rho_m \leq \Delta_k^m \leq \frac{8}{7}\Delta_k + 2^{-(m-1)} + 2\rho_m.$$

We first define the regret R_k^m generated by arm k in epoch m as

$$R_k^m \triangleq \Delta_k \tilde{n}_k^m = \begin{cases} \Delta_k n_k^m & k \neq k_m \\ \Delta_k \tilde{n}_k^m & k = k_m \end{cases}.$$

Then we analyze the regret in following three cases:

Case 1: $0 < \Delta_k \leq 64\rho_{m-1}$.

If $k \neq k_m$, then we have

$$R_k^m = \Delta_k n_k^m \leq 64\rho_{m-1} n_k^m.$$

If $k = k_m$, then we have

$$R_k^m = \Delta_k \tilde{n}_{k_m}^m \leq 64\rho_{m-1} N_m.$$

Case 2: $\Delta_k \leq 8 \cdot 2^{-m}$ and $\rho_{m-1} \leq \frac{\Delta_k}{64}$.

If $k \neq k_m$, then we have

$$R_k^m = n_k^m \Delta_k = \lambda_m (\Delta_k^{m-1})^{-2} \Delta_k \leq \lambda_m 2^{2(m-1)} \Delta_k \leq \frac{16\lambda_m}{\Delta_k}.$$

If $k = k_m$, since $\Delta_{k_m}^{m-1} = 2^{-(m-1)}$, we can get:

$$R_k^m = \tilde{n}_{k_m}^m \Delta_{k_m} \leq N_m \Delta_{k_m} = \lceil K\lambda_m 2^{2(m-1)} \rceil \Delta_{k_m} \leq \frac{16K\lambda_m}{\Delta_{k_m}} + \Delta_{k_m} \leq \frac{16K\lambda_m}{\Delta} + 1.$$

Case 3: $\Delta_k > 8 \cdot 2^{-m}$ and $\rho_{m-1} \leq \frac{\Delta_k}{64}$.

By Lemma 7 we have

$$\Delta_k^{m-1} \geq \frac{4}{7}\Delta_k - \frac{3}{2}2^{-m} - \frac{6}{64}\Delta_k \geq \Delta_k \left(\frac{4}{7} - \frac{3}{16} - \frac{6}{64} \right) \geq 0.29\Delta_k.$$

In this case, it is impossible that $k = k_m$ because $\Delta_{k_m}^{m-1} = 2^{-(m-1)} < 0.29 \cdot 8 \cdot 2^{-m} < 0.29\Delta_k$. So we can obtain

$$R_k^m = n_k^m \Delta_k = \lambda_m (\Delta_k^{m-1})^{-2} \Delta_k \leq \frac{\lambda_m}{0.29^2 \Delta_k} \leq \frac{16\lambda_m}{\Delta_k}.$$

We define $\mathcal{A}^m \triangleq \{k \in [K] \mid 0 < \Delta_k \leq 64\rho_{m-1}\}$ for epoch m . By combining all three cases, we can upper bound the regret as

$$\begin{aligned}
R(T) &= \sum_{m=1}^M \left(\sum_{k \in \mathcal{A}^m} R_k^m + \sum_{k \notin \mathcal{A}^m} R_k^m \right) \\
&\leq \sum_{m=1}^M \left(64\rho_{m-1}N_m + \sum_{k \in \mathcal{A}^m, k \neq k_m} 64\rho_{m-1}n_k^m + \sum_{k \notin \mathcal{A}^m, \Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\
&\quad \left. + \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \mathbb{I}(0 < \Delta_{k_m} \leq 8 \cdot 2^{-m}) \right) \\
&\leq \sum_{m=1}^M \left(64\rho_{m-1}N_m + \sum_{\Delta_k > 0} 64\rho_{m-1}n_k^m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\
&\quad \left. + \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \mathbb{I}(m \leq \log_2(8/\Delta)) \right) \\
&\leq \sum_{m=1}^M \left(128\rho_{m-1}N_m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right) + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16K\lambda_m}{\Delta} + 1 \right)
\end{aligned} \tag{14}$$

where the last inequality uses the fact that $\sum_{\Delta_k > 0} n_k^m \leq N_m$. Notice that we can bound the expectation of the offset level as

$$\mathbb{E}[D_m] = 2(1 - \delta_m)C_m + \delta_m N_m \leq 2C_m + 1$$

and we can bound $\sum_{m=1}^M \rho_{m-1}N_m$ as

$$\begin{aligned}
\sum_{m=1}^M \rho_{m-1}N_m &\leq \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \frac{D_s}{8^{m-1-s}N_s} \right) N_m \\
&\leq 4 \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \frac{(4^{m-1-s} + 1)\lambda_m D_s}{8^{m-1-s}\lambda_s} \right) \\
&= 4 \sum_{m=1}^M \left(\sum_{s=1}^{m-1} ((7/12)^{m-1-s} + (7/48)^{m-1-s}) D_s \right) \\
&= 4 \sum_{s=1}^{M-1} D_s \sum_{m=s+1}^M ((7/12)^{m-1-s} + (7/48)^{m-1-s}) \\
&\leq 4 \left(\sum_{m=1}^{M-1} D_m \right) \sum_{j=0}^{\infty} ((7/12)^j + (7/48)^j) \leq 11 \sum_{m=1}^{M-1} D_m.
\end{aligned} \tag{15}$$

Recalling the pseudo-code of SOG-BARBAT in Algorithm 4, we define the loop (Line 10-16) index as a . For ease of analysis, if removing multiple arms from H^m in one loop, we also consider this case as multi loops where the $\overline{H}_a^m$ is set by zero. According to the above analysis, we have $n_k^m \leq \frac{16\lambda_m}{\Delta_k^2}$. Defining $b = K - |\mathcal{A}^m|$, by Lemma 24, we can set a parameter $\gamma^m = \max_{s=1,2,\dots,b} |D_a^m|$. With loss of generality, for each arm $k \in \mathcal{A}^m$, we set $\Delta_1 \geq \Delta_2 \geq \dots \geq \Delta_b$. Recalling the process of Algorithm 4, we only need to pull $\overline{H}_a^m$ times for all arms in the out-domination set D_s^m , where we can observe at least $\overline{H}_a^m$ times for all arms $k \in [K]$. By this way, to maximize the value of $\sum_{k \in \mathcal{A}^m} R_k^m$, we should try to select the larger part of the suboptimal arm from the arms that have not been removed. In addition, we can have the following inequality:

$$\overline{H}_1^m \leq n_1^m = \frac{16\lambda_m}{\Delta_1^2}, \overline{H}_2^m - \overline{H}_1^m \leq \frac{16\lambda_m}{\Delta_2^2}, \dots, \overline{H}_b^m - \overline{H}_{b-1}^m \leq \frac{16\lambda_m}{\Delta_b^2}.$$

By this way, we can get the following equation:

$$\begin{aligned}
\sup_{k \in \mathcal{A}^m} R_k^m &= \sup_{s=1}^b \bar{H}_a^m \left(\sum_{k \in \mathcal{A}^m, k \in D_s^m} \Delta_k \right) \\
&= \sum_{s=1}^{b-\gamma^m+1} \left(\frac{16\lambda_m}{\Delta_s^2} - \frac{16\lambda_m}{\Delta_{s-1}^2} \right) \left(\sum_{k=s}^{s+\gamma^m} \Delta_k \right) + \sum_{s=b-\gamma^m+2}^b \left(\frac{16\lambda_m}{\Delta_s^2} - \frac{16\lambda_m}{\Delta_{s-1}^2} \right) \left(\sum_{k=s}^b \Delta_k \right) \\
&= \sum_{k=1}^{\gamma^m} \frac{16\lambda_m}{\Delta_k} + \sum_{k=\gamma^m+1}^b \left(\frac{16\lambda_m}{\Delta_k^2} - \frac{16\lambda_m}{\Delta_{k-\gamma^m}^2} \right) \Delta_k \\
&\leq \sum_{k=\gamma^m+1}^{2\gamma^m} \frac{20\lambda_m}{\Delta_k} + \sum_{k=2\gamma^m+1}^b \left(\frac{16\lambda_m}{\Delta_k^2} - \frac{16\lambda_m}{\Delta_{k-1}^2} \right) \Delta_k \leq \cdots \leq \sum_{k=b-\gamma^m+1}^b \frac{32\lambda_m}{\Delta_k}.
\end{aligned} \tag{16}$$

In the second inequality, for ease of write, we set $\frac{16\lambda_m}{\Delta_0^2} = 0$. For the above inequalities, we use the inequality $\frac{\beta_0}{\Delta_k} + \left(\frac{1}{\Delta_{\gamma^m+k}^2} - \frac{1}{\Delta_k^2} \right) \Delta_{\gamma^m+k} \leq \frac{\beta_1}{\Delta_{\gamma^m+k}}$ holds for all $2 \geq \beta_1 > \beta_0 \geq 1$. For example, in the first inequality, we have

$$\begin{aligned}
&\sum_{k=1}^{\gamma^m} \frac{16\lambda_m}{\Delta_k} + \sum_{k=\gamma^m+1}^{2\gamma^m} \left(\frac{16\lambda_m}{\Delta_k^2} - \frac{16\lambda_m}{\Delta_{k-\gamma^m}^2} \right) \Delta_k \\
&= 16\lambda_m \sum_{k=1}^{\gamma^m} \left(\frac{1}{\Delta_k} + \left(\frac{1}{\Delta_{\gamma^m+k}^2} - \frac{1}{\Delta_k^2} \right) \Delta_{\gamma^m+k} \right) \leq \sum_{k=\gamma^m+1}^{2\gamma^m} \frac{20\lambda_m}{\Delta_k}.
\end{aligned}$$

Combining Eq. (14), Eq. (15) and Eq. (16), by Lemma 4, we can get

$$\begin{aligned}
R(T) &\leq \sum_{m=1}^{M-1} 1440\mathbb{E}[D_m] + \sum_{m=1}^M \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16K\lambda_m}{\Delta} + 1 \right) \\
&\leq \sum_{m=1}^{M-1} 1440\mathbb{E}[D_m] + \sum_{\Delta_k > 0} \frac{2^{12}(\log^2(T) + 3\log(T)\log(30K))}{\Delta_k} \\
&\quad + \frac{2^{12}K(\log^2(8/\Delta) + 3\log(8/\Delta)\log(30K))}{\Delta} + \log(8/\Delta) \\
&\leq \sum_{m=1}^{M-1} 2880C_m + 1440 + \sum_{\Delta_k > 0} \frac{2^{14}\log(T)\log(30KT)}{\Delta_k} \\
&\quad + \frac{2^{14}K\log(8/\Delta)\log(240K/\Delta)}{\Delta} + \log(8/\Delta) \\
&\leq \sum_{m=1}^{M-1} 2880C_m + 1440 + \sum_{k \in \mathcal{I}^*} \frac{2^{15}\log(T)\log(30KT)}{\Delta_k} \\
&\quad + \frac{2^{14}K\log(8/\Delta)\log(240K/\Delta)}{\Delta} + \log(8/\Delta) \\
&= O \left(C + \sum_{k \in \mathcal{I}^*} \frac{\log(T)\log(KT)}{\Delta_k} + \frac{K\log(1/\Delta)\log(K/\Delta)}{\Delta} \right).
\end{aligned}$$

where $\mathcal{I}^*$ is the set of at most $\lfloor \alpha(1 + 2\ln(K/\alpha)) \rfloor$ arms with the smallest gaps. Especially, for directed acyclic graphs (including undirected graphs), $\mathcal{I}^*$ is the set of at most α arms with the smallest gaps.

B.5 Proof of Theorem 6

B.5.1 Notations

Following [15, 14], with loss of generality, we assume $\mu_1 \geq \mu_2 \geq \dots \geq \mu_K$ and $\Delta_k = \mu_k - \mu_d$ for all arms $k > d$.

B.5.2 Lemmas for Proving Theorem 6

By the methods mentioned before, Lemma 1 still holds. For Lemma 2, we need to consider the impact of changing k_m representing an arm to representing an arm set.

Lemma 25. *For any epoch m , the length N_m satisfies $dN_m \geq \sum_{k \in \mathcal{K}} n_k^m$. The actual expected pulling times $\tilde{n}_k^m \geq n_k^m$ for all arms $k \in [K]$.*

Proof. Since $\Delta_k^m = \max\{2^{-m}, r_*^m - r_k^m\} \geq 2^{-m}$, we can get

$$n_k^m = \lambda_m (\Delta_k^{m-1})^{-2} \leq \lambda_m 2^{2(m-1)}.$$

Therefore, we have

$$\sum_{k \in \mathcal{K}} n_k^m \leq K \lambda_m 2^{2(m-1)} = dN_m.$$

Since $N_m = K \lambda_m 2^{2(m-1)} / d$, so for arm $k \in \mathcal{K}_m$, we have

$$\tilde{n}_k^m = N_m - \sum_{k \notin \mathcal{K}_m} n_k^m / d \geq \lambda_m 2^{2(m-1)} \geq n_k^m.$$

This proof is complete. $\square$

Using the methods mentioned before, all lemmas in Appendix B.1 still holds. Maybe Lemma 7 will be different because we changed the way r_*^m is assigned. Next we will prove that Lemma 7 still holds.

Proof. Since $|r_k^m - \mu_k| \leq \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} + \frac{D_m}{N_m}$, we have

$$-\frac{D_m}{N_m} - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \leq r_k^m - \mu_k \leq \frac{D_m}{N_m} + \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}}.$$

Additionally, since

$$r_*^m \leq \mathbb{T}_d \left(\left\{ \mu_k + \frac{D_m}{N_m} + \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \right\}_{k \in [K]} \right) \leq \mu_d + \frac{D_m}{N_m},$$

$$r_*^m = \mathbb{T}_d \left(\left\{ r_k^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \right\}_{k \in [K]} \right) \geq r_d^m - \sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_d^m}} \geq \mu_d - 2\sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_d^m}} - \frac{D_m}{N_m},$$

we can get

$$-\frac{D_m}{N_m} - 2\sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_d^m}} \leq r_*^m - \mu_d \leq \frac{D_m}{N_m}.$$

According to Algorithm 1 and Lemma 2, we have $\tilde{n}_k^m \geq n_k^m$ for all arms k . Then we have the following inequality for all $k \in [K]$:

$$\sqrt{\frac{4 \ln(4/\beta_m)}{\tilde{n}_k^m}} \leq \sqrt{\frac{4 \ln(4/\beta_m)}{n_k^m}} = \frac{\Delta_k^{m-1}}{8}.$$

We now establish the upper bound for Δ_k^m by induction on m .

For the base case $m = 1$, the statement is trivial as $\Delta_k^1 = 1$ for all $k \in [K]$.

Assuming the statement is true for the case of $m - 1$, we have

$$\begin{aligned}\Delta_k^m &= r_*^m - r_k^m = (r_*^m - \mu_d) + (\mu_d - \mu_k) + (\mu_k - r_k^m) \\ &\leq \frac{D_m}{N_m} + \Delta_k + \frac{D_m}{N_m} + \frac{1}{8}\Delta_k^{m-1} \\ &\leq \frac{2D_m}{N_m} + \Delta_k + \frac{1}{8}\left(\frac{8\Delta_k}{7} + 2^{-(m-2)} + 2\rho_{m-1}\right) \\ &\leq \frac{8\Delta_k}{7} + 2^{-(m-1)} + 2\rho_m,\end{aligned}$$

Where the second inequality follows from the induction hypothesis.

Next, we provide the lower bound of Δ_k^m . We can get

$$\begin{aligned}\Delta_k^m &= r_*^m - r_k^m = (r_*^m - \mu_d) + (\mu_d - \mu_k) + (\mu_k - r_k^m) \\ &\geq -\frac{D_m}{N_m} - \frac{1}{4}\Delta_k^{m-1} + \Delta_k - \frac{D_m}{N_m} - \frac{1}{8}\Delta_k^{m-1} \\ &\geq -\frac{2D_m}{N_m} + \Delta_k - \frac{3}{8}\left(\frac{8\Delta_k}{7} + 2^{-(m-2)} + 2\rho_{m-1}\right) \\ &\geq \frac{4}{7}\Delta_k - \frac{3}{2}2^{-m} - 6\rho_m.\end{aligned}$$

where the third inequality comes from the upper bound of Δ_k^{m-1} . □

B.5.3 Proof for Theorem 6

Following to the work [15], we can define the regret R_k^m generated by arm k in epoch m as

$$R_k^m \triangleq \Delta_k \tilde{n}_k^m = \begin{cases} \Delta_k n_k^m & k \notin \mathcal{K}_m \\ \Delta_k \tilde{n}_k^m & k \in \mathcal{K}_m \end{cases}.$$

Then we analyze the regret in following three cases:

Case 1: $0 < \Delta_k \leq 64\rho_{m-1}$.

If $k \notin \mathcal{K}_m$, then we have

$$R_k^m = \Delta_k n_k^m \leq 64\rho_{m-1} n_k^m.$$

If $k \in \mathcal{K}_m$, then we have

$$R_k^m = \Delta_k \tilde{n}_k^m \leq 64\rho_{m-1} dN_m.$$

Case 2: $\Delta_k \leq 8 \cdot 2^{-m}$ and $\rho_{m-1} \leq \frac{\Delta_k}{64}$.

If $k \notin \mathcal{K}_m$, then we have

$$R_k^m = n_k^m \Delta_k = \lambda_m (\Delta_k^{m-1})^{-2} \Delta_k \leq \lambda_m 2^{2(m-1)} \Delta_k \leq \frac{16\lambda_m}{\Delta_k}.$$

If $k \in \mathcal{K}_m$, since $\Delta_{k_m}^{m-1} = 2^{-(m-1)}$, we can get:

$$R_k^m = \tilde{n}_{k_m}^m \Delta_{k_m} \leq dN_m \Delta_{k_m} = d[K\lambda_m 2^{2(m-1)} / d] \Delta_{k_m} \leq \frac{16Kd\lambda_m}{\Delta_{k_m}} + d\Delta_{k_m} \leq \frac{16Kd\lambda_m}{\Delta} + d.$$

Case 3: $\Delta_k > 8 \cdot 2^{-m}$ and $\rho_{m-1} \leq \frac{\Delta_k}{64}$.

By Lemma 7 we have

$$\Delta_k^{m-1} \geq \frac{4}{7}\Delta_k - \frac{3}{2}2^{-m} - \frac{6}{64}\Delta_k \geq \Delta_k \left(\frac{4}{7} - \frac{3}{16} - \frac{6}{64}\right) \geq 0.29\Delta_k.$$

In this case, it is impossible that $k \in \mathcal{K}_m$ because $\Delta_{k_m}^{m-1} = 2^{-(m-1)} < 0.29 \cdot 8 \cdot 2^{-m} < 0.29\Delta_k$. So we can obtain

$$R_k^m = n_k^m \Delta_k = \lambda_m (\Delta_k^{m-1})^{-2} \Delta_k \leq \frac{\lambda_m}{0.29^2 \Delta_k} \leq \frac{16\lambda_m}{\Delta_k}.$$

We define $\mathcal{A}^m \triangleq \{k \in [K] \mid 0 < \Delta_k \leq 64\rho_{m-1}\}$ for epoch m . By combining all three cases, we can upper bound the regret as

$$\begin{aligned}
R(T) &= \sum_{m=1}^M \left(\sum_{k \in \mathcal{A}^m} R_k^m + \sum_{k \notin \mathcal{A}^m} R_k^m \right) \\
&\leq \sum_{m=1}^M \left(64\rho_{m-1}dN_m + \sum_{k \in \mathcal{A}^m, k \neq k_m} 64\rho_{m-1}n_k^m + \sum_{k \notin \mathcal{A}^m, \Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\
&\quad \left. + \left(\frac{16Kd\lambda_m}{\Delta} + d \right) \mathbb{I}(0 < \Delta_{k_m} \leq 8 \cdot 2^{-m}) \right) \\
&\leq \sum_{m=1}^M \left(64\rho_{m-1}dN_m + \sum_{\Delta_k > 0} 64\rho_{m-1}n_k^m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right. \\
&\quad \left. + \left(\frac{16Kd\lambda_m}{\Delta} + d \right) \mathbb{I}(m \leq \log_2(8/\Delta)) \right) \\
&\leq \sum_{m=1}^M \left(128\rho_{m-1}dN_m + \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} \right) + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16Kd\lambda_m}{\Delta} + d \right)
\end{aligned} \tag{17}$$

where the last inequality uses the fact that $\sum_{\Delta_k > 0} n_k^m \leq N_m$. Notice that we can bound the expectation of the offset level as

$$\mathbb{E}[D_m] = 2(1 - \delta_m)C_m + \delta_m N_m \leq 2C_m + 1$$

and we can bound $\sum_{m=1}^M \rho_{m-1}N_m$ as

$$\begin{aligned}
\sum_{m=1}^M \rho_{m-1}dN_m &\leq \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \frac{D_s}{8^{m-1-s}N_s} \right) dN_m \\
&\leq 4d \sum_{m=1}^M \left(\sum_{s=1}^{m-1} \frac{(4^{m-1-s} + 1)\lambda_m}{8^{m-1-s}\lambda_s} D_s \right) \\
&= 4d \sum_{m=1}^M \left(\sum_{s=1}^{m-1} ((7/12)^{m-1-s} + (7/48)^{m-1-s}) D_s \right) \\
&= 4d \sum_{s=1}^{M-1} D_s \sum_{m=s+1}^M ((7/12)^{m-1-s} + (7/48)^{m-1-s}) \\
&\leq 4d \left(\sum_{m=1}^{M-1} D_m \right) \sum_{j=0}^{\infty} ((7/12)^j + (7/48)^j) \leq 11d \sum_{m=1}^{M-1} D_m.
\end{aligned} \tag{18}$$

Combining Eq. (17) and Eq. (18), by Lemma 4, we can get

$$\begin{aligned}
R(T) &\leq \sum_{m=1}^{M-1} 1440\mathbb{E}[dD_m] + \sum_{m=1}^M \sum_{\Delta_k > 0} \frac{16\lambda_m}{\Delta_k} + \sum_{m=1}^{\log_2(8/\Delta)} \left(\frac{16Kd\lambda_m}{\Delta} + d \right) \\
&\leq \sum_{m=1}^{M-1} 1440\mathbb{E}[dD_m] + \sum_{\Delta_k > 0} \frac{2^{12}(\log^2(T) + 3\log(T)\log(30K))}{\Delta_k} \\
&\quad + \frac{2^{12}Kd(\log^2(8/\Delta) + 3\log(8/\Delta)\log(30K))}{\Delta} + d\log(8/\Delta) \\
&\leq \sum_{m=1}^{M-1} 2880dC_m + 1440d + \sum_{\Delta_k > 0} \frac{2^{14}\log(T)\log(30KT)}{\Delta_k} \\
&\quad + \frac{2^{14}Kd\log(8/\Delta)\log(240K/\Delta)}{\Delta} + d\log(8/\Delta) \\
&= O\left(dC + \sum_{\Delta_k > 0} \frac{\log(T)\log(KT)}{\Delta_k} + \frac{dK\log(1/\Delta)\log(K/\Delta)}{\Delta}\right).
\end{aligned}$$

	BARBAT	DRAA	IND-BARBAR	IND-FTRL
$K = 12$	0.13 s	0.14 s	0.12 s	1.53 s
$K = 16$	0.13 s	0.15 s	0.14 s	1.91 s

Table 2: The cost time of each agent for BARBAT and all baseline methods.

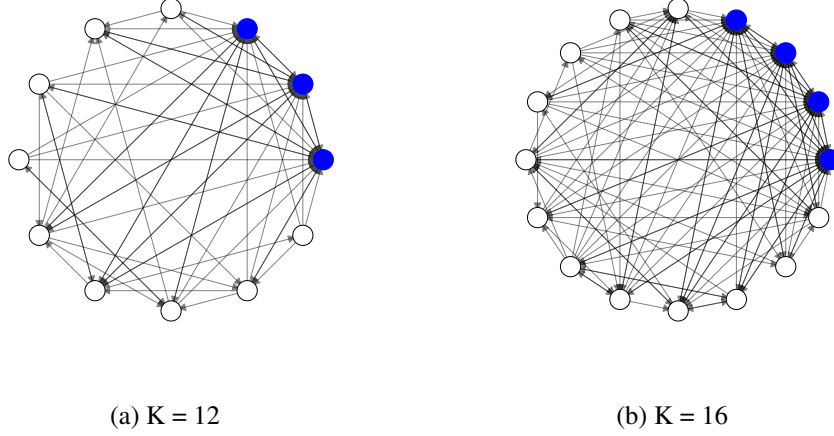


Figure 4: The feedback structure for the strongly observable graph bandits.

C Experimental Details

C.1 Cooperative Multi-Agent Multi-Armed Bandits

We first consider CMA2B, where the mean rewards $\{\mu_k\}_{k \in [K]}$ is uniformly distributed in the interval $[0.02, 0.96]$. For each arm k , we generate the stochastic rewards according to a truncated normal distribution with support $[0, 1]$, mean μ_k , and variance 0.1. We use a time horizon $T = 50000$, set the corruption level $C = 2000, 5000$ and the number of arms $K = 12, 16$. Following [10], we set the two worst arms as target arms and corrupt the target arm's reward to 1 and the other arms' rewards to zero until the corruption level is exhausted.

As seen in Table 2, the time cost by BARBAT is much shorter than that of the FTRL, which confirms that the computational efficiency of the BARBAT framework is much higher than that of the FTRL framework.

C.2 Strongly Observable Graph Bandits

Following [10], we adopt the Erdos–Renyi model [36] to generate feedback graph in Figure 4, with the independence number $\alpha = 4$. Specifically, for each pair of arms $(u, v) \in [K] \times [K]$ with $u = v$, we connect them with a fixed probability 0.5. Blue circles represent vertices without self-loops, while white circles represent vertices with self-loops.

C.3 d -Set Semi-bandits

In d -set semi-bandits, we set $d = 3$ for $K = 12$, and $d = 4$ for $K = 16$. Following the recent works [15, 17], we generate the stochastic rewards according to a Bernoulli distribution, other settings are the same as cooperative standard MAB.

	BARBAT	HYBRID	LBINF	LBINF_LS	LBINF_GD
K = 12	0.36 s	14.63 s	10.16 s	10.21 s	9.84 s
K = 16	0.37 s	18.62 s	12.37 s	12.67 s	12.69 s

Table 3: The cost time of each agent for BARBAT and all baseline methods.

As seen in Table 3, the time cost by BARBAT is much shorter than that of the FTRL, which confirms that the computational efficiency of the BARBAT framework is much higher than that of the FTRL framework.