
Learning Neural Exposure Fields for View Synthesis

Michael Niemeyer* Fabian Manhardt Marie-Julie Rakotosaona Michael Oechsle
Christina Tsalicoglou Keisuke Tateno Jonathan T. Barron Federico Tombari
Google

Abstract

Recent advances in neural scene representations have led to unprecedented quality in 3D reconstruction and view synthesis. Despite achieving high-quality results for common benchmarks with curated data, outputs often degrade for data that contain per image variations such as strong exposure changes, present, e.g., in most scenes with indoor and outdoor areas or rooms with windows. In this paper, we introduce Neural Exposure Fields (NExF), a novel technique for robustly reconstructing 3D scenes with high quality and 3D-consistent appearance from challenging real-world captures. In the core, we propose to learn a neural field predicting an optimal exposure value per 3D point, enabling us to optimize exposure along with the neural scene representation. While capture devices such as cameras select optimal exposure per image/pixel, we generalize this concept and perform optimization in 3D instead. This enables accurate view synthesis in high dynamic range scenarios, bypassing the need of post-processing steps or multi-exposure captures. Our contributions include a novel neural representation for exposure prediction, a system for joint optimization of the scene representation and the exposure field via a novel neural conditioning mechanism, and demonstrated superior performance on challenging real-world data. We find that our approach trains faster than prior works and produces state-of-the-art results on several benchmarks improving by over 55% over best-performing baselines.

1 Introduction

Neural scene representations [8, 24, 33, 50] have revolutionized 3D vision due to their simple design, stable optimization, and state-of-the-art performance. As a result, they have now become the predominant representation for many 3D vision tasks ranging from 3D and 4D reconstruction [19, 30, 34–36, 53], to generative modeling [20, 29, 38, 44, 46], to view synthesis [3, 4, 26, 28].

While these methods have achieved unprecedented performance on existing view synthesis datasets, the majority of these benchmarks [3, 25] factor out several conditions that might occur in real world captures leading to a performance gap on such data. Among different phenomena, in particular strong exposure and appearance changes can lead to drastically degraded results (see Fig. 1a).

Prior works that consider exposure information during the optimization have explored this from a computer graphics perspective and usually aim to either reproduce images with certain exposures or recover a high dynamic range (HDR) representations that can be tonemapped via professional software [6, 13, 15, 47]. However, the goal of many applications is not only to reproduce input views at the same exposure, but to reconstruct scenes from RGB images in a 3D consistent manner and with an appearance that is most faithful to the real world. Another line of work does not consider input exposure and aim to recover a 3D consistent scene by explaining away per-image variations. For example, what has been widely adopted in practice is to use generative latent optimization (GLO) embeddings [5], e.g., as done in the pioneering work NeRF-W [21]. While being a robust solution

*Corresponding author: mniemeyer@google.com

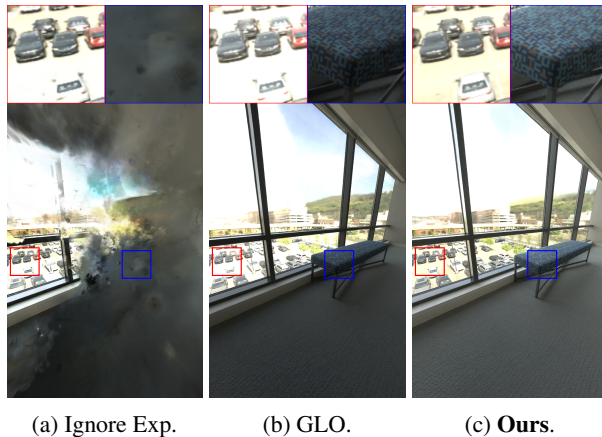


Figure 1: **Neural Exposure Fields.** While state-of-the-art neural fields [4] produce high-quality results on clean, well-curated datasets, the quality drops significantly for real-world captures if the exposure variation is ignored (1a). When equipped with per-view GLO embeddings [4, 21], the results improve (1b) but scene parts might be over- or underexposed. In contrast, our neural exposure field leads to high-quality 3D consistent scene appearance (1c) while no manual post-processing or reference view is required.

for smaller appearance changes, we find that it leads to non-ideal color predictions when drastic variations are present, and parts of the scene can be over- or underexposed (see Fig. 1b). Recently, Bilarf [49] aims to learn more local bilateral mappings to explain per-image appearance changes. However a separate processing step is required together with a target appearance, e.g., given by an HDR image produced by an artist with professional software.

In this work, we present Neural Exposure Fields (NexF), a novel method to reconstruct scenes with high-quality appearance that shows well-exposed colors while being consistent in 3D (Fig. 1c). Our key insight is that we can learn a neural field that predicts an optimal exposure value per 3D point jointly with the scene representation. By aggregating information in 3D, as opposed to in 2D as done in capturing devices and previous works, our model is 3D consistent by design, freeing us from a separate per-image 2D tonemapping process (see Fig. 2). Further, we propose to learn neural exposure fields jointly with grid-based radiance fields using a novel latent exposure conditioning mechanism, leading to improved performance. In summary, **our contributions** are:

- A novel neural representation to predict optimal exposure values per 3D point.
- A system to jointly learn the exposure field and the neural 3D scene representation with a novel latent conditioning mechanism that produces high-quality view synthesis while being consistent in 3D.
- A thorough evaluation of the proposed system and baselines where we find that our approach improves over the state-of-the-art by more than 55% in MSE.

We believe that our proposed system is a significant step towards bringing neural 3D scene representations closer to challenging real-world use cases while pushing the quality of view synthesis.

2 Related Work

Neural Fields. Since their emergence in 3D reconstruction [8, 24, 33, 50], neural fields have become a leading technique for various 3D vision tasks, e.g., 3D/4D reconstruction [19, 30, 34–36, 53], 3D generative modeling [7, 20, 29, 38, 44, 46], and view synthesis [3, 4, 26]. Their widespread adoption can be attributed to factors such as simplicity, strong performance, and stable optimization [50]. Unlike more traditional representations such as point clouds [37, 40, 41], voxels [22, 39], or meshes [12, 48], neural fields, especially when parameterized as an MLP, typically do not require

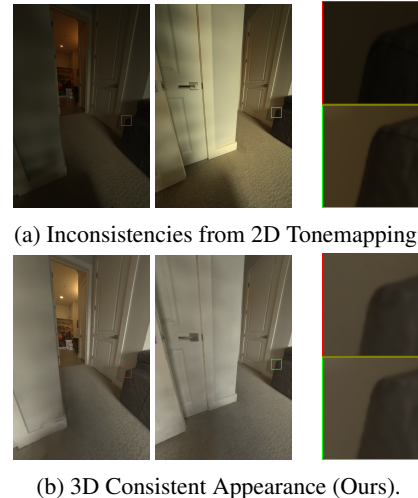


Figure 2: **3D Consistent Appearance.** Prior works [6, 15] use 2D tonemapping which can lead to inconsistent appearance of the same 3D point even in close-by views (2a). In contrast, our method produces 3D consistent appearance across the entire scene (2b).

complex regularization, manually tuned initializations, or specialized optimization mechanisms. As a result, we chose to represent our exposure field as a neural field that is optimized end-to-end along with the neural scene representation.

Neural Fields for View Synthesis. In the context of view synthesis, Neural Radiance Fields (NeRF) [26] have produced unprecedented results by optimizing neural fields using volume rendering which demonstrated greater robustness compared to previous surface-based rendering methods [31, 45, 52]. This breakthrough inspired a series of follow-up works that improved, among others, the rendering quality [2–4] and speed [11, 18, 28, 32, 42, 43, 53]. Due to state-of-the-art performance, we use a modified version of ZipNeRF [4] as our scene representation. Note that we do not choose 3DGS [18] as scene representation in this work due to the degradation on challenging data and less stable joint optimization together with our neural exposure field parameterized by an MLP [32].²

Neural View Synthesis Beyond RGB Captures. Several works have investigated how neural fields can be used for view synthesis from non-traditional captures. For example, [27, 47] investigate raw captures and [9, 54] low-light captures. Closer related to us, [6, 13, 15, 16, 47] investigate how tonemapping of HDR representations can be learned. HDRNeRF [15] proposes to condition a NeRF model on exposure by transforming the radiance to the log domain, achieving impressive results for HDR data. Nevertheless, HDRNeRF requires commercial 2D tonemapping software [14] and is also not 3D consistent. In [16], this model is extended with a field to predict local exposure. However, they require two training stages leading to excessive training times and rely on pseudo ground truth generated by the trained NeRF model to supervise the local exposure module, hence being restricted to synthetic, small-scale scenes. In contrast, our method is trained end-to-end by jointly optimizing the NeRF model and the neural exposure field. Further, our model produces high-quality, 3D consistent results even for challenging and large-scale captures with varying exposure.

Neural View Synthesis for In-the-Wild Data. While first view synthesis works were evaluated mostly on synthetic or very clean real-world captures, latter works shifted focus towards more in-the-wild data. The pioneering work NeRF-W [21] proposes to use Generative Latent Optimization (GLO) embeddings [5] to factor out per-image appearance variations. At test time, novel views are rendered with a fixed embedding (usually the zero vector) to generate a 3D consistent appearance. In [4], this approach is improved by optimizing an affine GLO transformation applied to the bottleneck of the MLP. While producing 3D consistent results, there is no direct control over the final predicted color and in the presence of strong exposure changes, it approaches a mean prediction which can produce over and underexposure for parts of the scene (see Fig. 1b). In Bilarf [49], per-view 3D bilateral grids are optimized and at test time, the appearance of a target image can be lifted to 3D in a second optimization stage. While producing good results, this is memory-heavy, time-consuming, and further requires a reference image that needs to be created by a professional artist or commercial HDR software [1]. In this work, we optimize a neural exposure field along with the scene representation that by design produces 3D consistent and high-quality, well-exposed colors without the need of an additional postprocessing step or a professionally-created reference image.

3 Method

We first describe our scene representation and latent exposure conditioning in Sec. 3.1. Next, we explain our neural exposure field along with the weighting criteria in Sec. 3.2. Finally, in Sec. 3.3 we outline the optimization strategy and implementation details. In Fig. 3, we show an overview over our method.

3.1 Neural Radiance Fields

A radiance field f maps a point in 3D space $\mathbf{x} \in \mathbb{R}^3$ together with a viewing direction $\mathbf{d} \in \mathbb{S}^2$ to a volume density $\sigma \in \mathbb{R}^+$ and an RGB color value $\mathbf{c} \in \mathbb{R}^3$. The final color prediction for a pixel is approximated via quadrature using N_s sample points along the ray [17]:

$$\mathbf{c}_{\text{pixel}} = \sum_{j=1}^{N_s} \tau_j \alpha_j \mathbf{c}_j, \quad \tau_j = \prod_{k=1}^{j-1} (1 - \alpha_k), \quad \alpha_j = 1 - e^{-\sigma_j \delta_j}, \quad \delta_j = \|\mathbf{x}_{j+1} - \mathbf{x}_j\|_2$$

²Our model can directly be combined with distillation approaches such as [32].

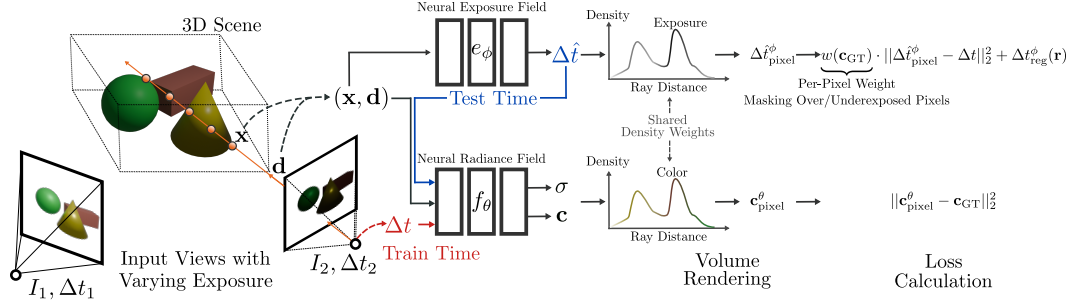


Figure 3: **Method Overview.** Our method takes as input a set of RGB images $\{I_i\}_i$ with exposure times $\{\Delta t_i\}_i$ and outputs a neural representation that produces high-quality, well-exposed appearance in a 3D consistent manner from arbitrary viewpoints. More specifically, **during training**, points are sampled along the ray and for each point $\mathbf{x}$, viewing direction $\mathbf{d}$, and input exposure Δt , the neural field f_θ predicts a density σ and a color $\mathbf{c}$. The final color prediction $\mathbf{c}_{\text{pixel}}$ is obtained via volume rendering and the model is trained with the MSE loss on the input views with varying exposure. Similarly, the neural exposure field is trained by volume rendering the 3D predictions $\Delta \hat{t}$ to the image plane and backpropagating the reconstruction loss wrt. the input exposure weighted by how well the pixel is exposed and saturated. **At test time**, the neural field f_θ is instead conditioned on the neural exposure field predictions $\Delta \hat{t}$, producing high-quality, well-exposed novel views that are consistent in 3D where no 2D tonemapping nor target appearance produced by a professional is required.

where τ_j is transmittance, α_j is the alpha value for $\mathbf{x}_j$, and δ_j is the distance between neighboring samples.

Parameterization. A neural radiance field [26] optimizes an MLP f_θ parameterized by network weights θ using gradient descent with a reconstruction loss:

$$\mathcal{L}_f(\theta) = \sum_{\mathbf{r} \in \mathcal{R}_{\text{batch}}} \|\mathbf{c}_{\text{pixel}}^\theta(\mathbf{r}) - \mathbf{c}_{\text{GT}}(\mathbf{r})\|_2^2 \quad (1)$$

where $\mathbf{r} \in \mathcal{R}_{\text{batch}}$ are sampled batches of rays. Using multisampling and a multi-resolution backbone [28], Zip-NeRF [4] produces state-of-the-art performance in view synthesis and we therefore adopt this architecture in our work. For complex real-world scenes like [51], we add affine GLO embedding vectors as proposed in [4] to increase robustness. Furthermore, we find that for forward-facing scenes, as present in the HDRNeRF [15] dataset, modifications for view-dependent color predictions are required to prevent overfitting. More specifically, for such scenes, we adjust the view-dependent branch from three layers with 256 hidden units to only two layers with 64 hidden units. We also reduce the bottleneck dimensionality to 15 and remove the skip connection to the second layer.

Latent Exposure Conditioning. Many real-world captures contain significant exposure variations and provide a per-image ground-truth exposure value. This lets us use per-image exposure as an input to our model alongside the RGB images, and condition the color prediction on exposure. We follow the classical nonparametric Conditional Random Fields (CRF) calibration [10, 15] and perform the conditioning in the logarithm radiance domain. Unlike prior works, however, we apply the transformation to the bottleneck vector of the MLP:

$$f_\theta(\mathbf{x}, \mathbf{d}, \Delta t(\mathbf{r})) = f_\theta^{\text{view}}(f_\theta^{\text{pos}}(\mathbf{x}) + \ln \Delta t(\mathbf{r}), \mathbf{d}), \quad (2)$$

where $\mathbf{x}$ is the sample point, $\mathbf{d}$ the viewing direction, $\Delta t(\mathbf{r})$ the exposure of corresponding ray $\mathbf{r}$, and $f_\theta^{\text{pos}}(\mathbf{x})$ the bottleneck vector. Crucially, we assume that $f_\theta^{\text{pos}}(\mathbf{x})$ predicts log radiance so that we do not require any transformation (see Fig. 5). We find that this latent conditioning leads to improved performance compared to prior works [15]. During training, we condition our NeRF f_θ on the input exposure to correctly reconstruct the input images following (1). However, at test time we condition on the neural exposure field prediction, which we will discuss in the following section.

3.2 Neural Exposure Fields

We propose to optimize a per-scene neural exposure field to predict the optimal exposure for each 3D point:

$$e_\phi : \mathbb{R}^3 \rightarrow \mathbb{R}, \mathbf{x} \mapsto \Delta \hat{t}(\mathbf{x}) \quad (3)$$



(a) RGB Prediction.



(b) Exposure Prediction.

Figure 4: Exposure Visualization. Instead of a single exposure per image as commonly done, we optimize a 3D neural exposure field predicting optimal exposure in 3D leading to well-exposed colors for all parts of the scene (see e.g. short exposure (dark) for outdoor and longer exposure (white) for darker indoor parts above).

where ϕ indicates the network parameters and $\hat{\Delta t}(\mathbf{x})$ the predicted exposure at 3D point $\mathbf{x}$. It is important to note that, in contrast to the conventional formulation of exposure, we define exposure not as a function of the camera location and viewing direction, but as a function of 3D position. This is based on the hypothesis that there exists an optimal exposure value for each 3D point for which the predicted color is well-exposed (see Fig. 4). This lets us learn high-quality appearances for high-dynamic range scenarios that are consistent in 3D, in contrast to prior works [6, 15] that perform tonemapping on the 2D image plane leading to inconsistent synthesis across views.

Parameterization. We parameterize our neural exposure field e as a fully-connected MLP. We optimize this neural exposure field alongside our scene representation f_θ . As we aggregate exposure information in 3D, in contrast to prior works and capturing devices that operate in 2D, we can define criteria to obtain the best-possible “ideal” exposure per point which we will do in the following.

Objective 1: Well-Exposedness. A pixel’s color is often referred to as over- or underexposed if the color value is close or at the clipping boundaries. More specifically, we measure well-exposedness as

$$w_{\text{exp}}(\mathbf{c}) = \prod_i \exp\left(-\frac{(c_i - 1/2)^2}{\sigma_{\text{exp}}}\right), \quad (4)$$

where σ_{exp} is a hyperparameter controlling the sharpness of the weight curve.

Objective 2: Saturation. While our main focus lies on learning ideal exposure per 3D point, we draw inspiration from classical image processing [23] and further integrate an objective that aims to obtain well saturated colors. More specifically, we define

$$w_{\text{sat}}(\mathbf{c}) = \sqrt{\frac{1}{3} \sum_i (c_i - \mu_c)^2}, \quad (5)$$

where μ_c defines the mean of the R, G, and B value of $\mathbf{c}$.

Regularization. Given that there is no target ground truth 3D exposure available, we find that adding regularization in 3D space leads to better results. Intuitively, we hypothesize that the ideal exposure changes smoothly in 3D space as close-by 3D points are presumably well-exposed at similar exposure times. More specifically, we calculate the squared distance between predicted exposure of nearby 3D points

$$\Delta t_{\text{diff}} = \|e_\phi(\mathbf{x}) - e_\phi(\mathbf{x} + \epsilon)\|_2^2, \quad (6)$$

where $\epsilon \sim \mathcal{N}(0, 0.05)$ is a small 3D normally-distributed noise vector. As outlined next, we penalize Δt_{diff} to regularize our neural exposure field that in turn leads to improved performance.

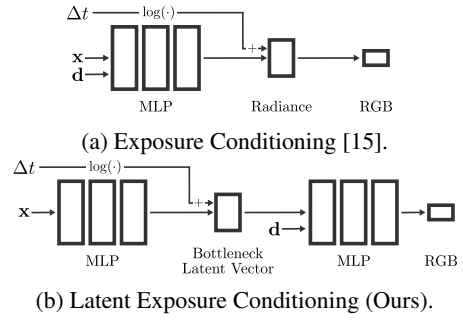


Figure 5: Exposure Conditioning. While prior works [15] condition the color prediction on the log exposure by adding it onto the radiance (5a), we also perform the log transformation but condition in latent space instead (5b), leading to improved performance and more stable optimization.

3.3 Optimization

We do not assume to have a target RGB or HDR appearance but rather to learn optimal exposure from 2D observations to produce high-quality, 3D consistent appearance. Our key idea is to selectively backpropagate the exposure of input views only if the color is well exposed and well saturated, according to our objective functions. This way, we do not need to assume that every pixel is well exposed in certain views which is often not the case, but rather only need to make the assumption that most areas in the 3D scene show well exposed colors in *some* view. More specifically, we observe that we can render predicted exposure similarly to color as $\Delta t_{\text{pixel}} = \sum_{j=1}^{N_s} \tau_j \alpha_j \Delta t_j$ where τ , α , and δ are the same as in (3.1). Next, we define a per-pixel weight

$$w(\mathbf{c}) = w_{\text{exp}}(\mathbf{c})^{\lambda_{\text{exp}}} \cdot w_{\text{sat}}(\mathbf{c})^{\lambda_{\text{sat}}}, \quad (7)$$

where λ_{exp} and λ_{sat} are hyperparameters controlling the influence of the respective mask. For regularization, we can similarly render the exposure difference of nearby sample points $\Delta t_{\text{reg}} = \sum_{j=1}^{N_s} \tau_j \alpha_j \Delta t_{\text{diff}}^j$. We train our neural exposure field e_ϕ with the input exposure

$$\mathcal{L}_e(\phi) = \sum_{\mathbf{r} \in \mathcal{R}_{\text{batch}}} w(\mathbf{c}(\mathbf{r})) \cdot \left\| \Delta \hat{t}_{\text{pixel}}^\phi(\mathbf{r}) - \Delta t(\mathbf{r}) \right\|_2^2 + \Delta t_{\text{reg}}^\phi(\mathbf{r})$$

Joint Optimization. We train our neural scene representation f_θ and exposure field e_ϕ end-to-end from the input captures and the full loss formulation becomes

$$\mathcal{L}(\theta, \phi) = \mathcal{L}_f(\theta) + \mathcal{L}_e(\phi). \quad (8)$$

It is important to note that we only require RGB images with exposure as input and no additional labels are required. Using our color-based criteria, we produce high-quality 3D consistent view synthesis results in high dynamic range scenarios while prior works require, e.g., a target HDR image from an artist or access to professional HDR software.

Implementation Details. We parameterize our neural exposure field as a fully-connected MLP with ReLU activation and four hidden layers with a hidden dimension of 128. For rendering the predicted exposure to the image plane, we re-use the alpha blending weights calculated for the RGB rendering pass (see (3.1)) for faster performance and detach the gradients so that the scene geometry prediction is not affected by the exposure field prediction branch. In the NeRF model, we use a bottleneck vector dimension of 256 per default except for forward-facing scenes where we use a dimension of 15. We train both models jointly for 10,000 iterations (approx. 10 min.) on forward-facing and for 25,000 iterations (approx. 30 min.) on room- and apartment-sized scenes on 8 V100 GPUs. For additional details on the NeRF parameterization, we refer the reader to [4]. We set the weighting-related hyperparameters as $\sigma_{\text{exp}} = 0.05$, $\lambda_{\text{exp}} = 0.1$, and $\lambda_{\text{sat}} = 1$.

4 Experiments

Data. To evaluate our neural scene representation with the latent exposure conditioning, we report reconstruction results on the HDRNeRF [15] dataset (MIT). To further evaluate our model on real-world and scene-level captures,

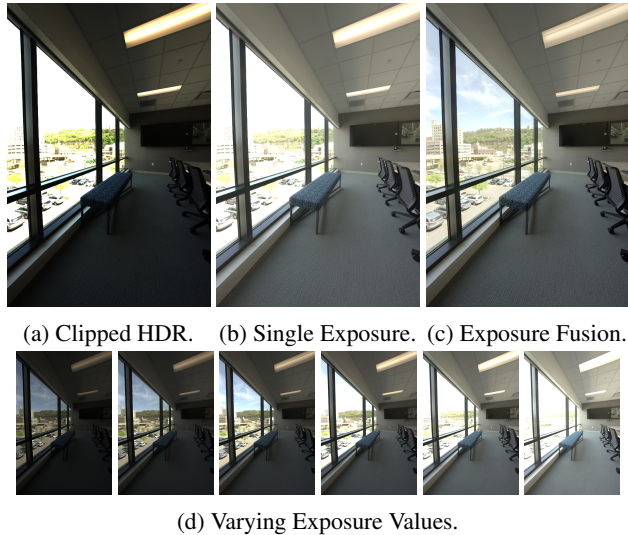


Figure 6: **Exposure Fusion.** During training, each input image is observed with only a single randomly-sampled exposure (6d). For evaluation, we apply exposure fusion (6a) to obtain higher-quality and well-exposed target images (6c) compared to the default single exposure images (6b).

we also report results on the recently proposed Eyeful Tower dataset v2 [51] (CC BY-NC I 4.0). In contrast to other common view synthesis benchmarks like [3], the Eyeful Tower dataset contains HDR images that we can use to simulate varying exposure and to produce meaningful target images. Finally, we test our model on in-the-wild phone captures from [49] (Apache 2.0) and a large-scale scene from [4] (CC-BY).

Metrics. For the exposure reconstruction experiments, we follow prior works [6, 15] and report view synthesis metrics PSNR, SSIM, and LPIPS against the ground truth images for both in-distribution and out-of-distribution exposure values. For evaluating our neural exposure field on room-level scenes, we use the HDR data from the Eyeful Tower [51] dataset that allows us to generate tonemapped images with different exposures. For the training set, for each view we sample an exposure value from an exposure set $(\frac{1}{16}, \frac{1}{8}, \frac{1}{4}, \frac{1}{2}, 1, 2)$ so that every pose is only observed once with one exposure. For evaluation, we use the HDR data to generate each test view with all exposures from our exposure set and then produce the target image by applying classical exposure fusion [23] as illustrated in Fig. 6. To measure how well our method and baselines produce well-exposed reconstructions, we report PSNR, SSIM, LPIPS against these target images on the test set.

Baselines. For the exposure reconstruction experiments, we compare against state-of-the-art methods NeRF [26], ZipNeRF [4], 3DGS [18], NeRF-W [21], HDRNeRF [15], and HDR-GS [6], where HDR-GS is the only method that further requires the HDR captures as input, while all other methods only use RGB at sampled exposure. For the results on the Eyeful Tower scenes, we report our method and all baselines with the same ZipNeRF [4] backbone to enable a fair comparison. For these experiments, we compare against ZipNeRF a.) without any modification to handle varying exposure (“Ignore Exposure”), b.) with GLO embeddings [5, 21], c.) with affine GLO embeddings [4], d.) HDRNeRF*[15] for which we train the NeRF model with exposure input and at test time, we render with constant mean exposure over all input images.

4.1 View Synthesis with Input Exposure

In the first experiment, we evaluate the performance of our chosen neural scene representation and the novel latent exposure conditioning mechanism. The task is to reconstruct test views at different input exposures.

Table 1: **Comparison on HDRNeRF.** We find that for both in-distribution (IN) and out-of-distribution (OOD) exposure values, our method overall performs best while training significantly faster than prior works. *Note that HDR-GS [6] uses the HDR data during training, while all other methods only rely on RGB images at sampled exposure.

	Time	ID Exposure (t_1, t_3, t_5)			OOD Exposure (t_2, t_4)		
	min.	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
NeRF [26]	405	13.97	0.555	0.376	14.51	0.522	0.428
ZipNeRF [4]	11	19.00	0.682	0.142	19.73	0.724	0.125
3DGS [18]	38	19.46	0.690	0.276	18.97	0.778	0.309
NeRF-W [21]	437	29.83	0.936	0.047	29.22	0.927	0.050
HDRNeRF [15]	542	39.07	0.973	0.026	37.53	0.966	0.024
HDR-GS* [6]	34	41.10	0.982	0.011	36.33	0.977	0.016
Ours	11	42.54	0.988	0.014	38.36	0.984	0.021

Quantitative Results. In Tab. 1 we observe that our method overall leads to the best performance while training $3\times$ faster than the fastest baselines. Compared to HDRNeRF [15], the prior state-of-the-art that also uses only RGB sampled at exposure values during training, we improve by 3.5 PSNR from 39.07 to 42.54 on the in-distribution (ID) exposure values and by 0.8 PSNR from 37.53 to 38.36 on the out-of-distribution (OOD) exposure values. Compared to HDR-GS [6] that requires not only sampled RGB but the full HDR capture during optimization, we also improve in PSNR (by 1.4 on ID and 2.0 on OOD exposure) and SSIM while achieving a slightly higher LPIPS value. It is crucial to note that RGB input sampled at different exposures is a common scenario for real-world captures, while HDR captures require a professional setup and usually are only available for professionally captured or synthetic environments. We conclude that our method performs best for view synthesis with input exposure compared to SOTA baselines while training at least $3\times$ faster.

Table 2: **Ablation on HDRNeRF.** We ablate our proposed view-dependent MLP architecture for forward-facing scenes (w/o Our View. MLP) and the latent exposure conditioning (w/o Lat. Con.). Our full model leads to the best results on all metrics.

	ID Exposure (t_1, t_3, t_5)			OOD Exposure (t_2, t_4)		
	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
w/o Our View. MLP	33.85	0.928	0.104	28.20	0.880	0.170
w/o Lat. Con.	39.88	0.979	0.038	38.33	0.978	0.034
Ours	42.54	0.988	0.014	38.36	0.984	0.021

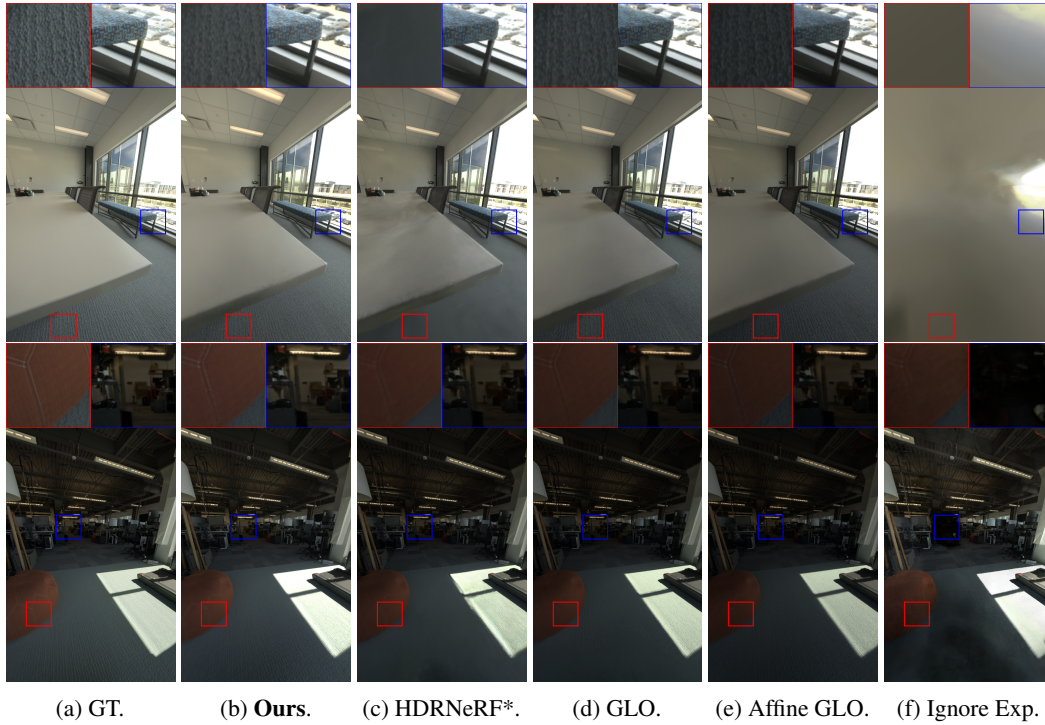


Figure 7: **Qualitative Results on Eyeful Tower.** Results from our model and baselines for the office_view2 and riverview scenes.

Ablation. We additionally perform an ablation study in Tab. 2 for the exposure reconstruction experiment to verify the relevance of important components. We find that our model without our view-dependent MLP parameterization (see Sec. 3.1) leads to degraded results and tends to overfit to input images. If we do not use our latent exposure conditioning in our model, we find that the quality drops as the model is less expressive and predicted views are less sharp. Our full model leads to the best results on all metrics and we conclude that both contributions are required for high performance.

4.2 View Synthesis with Neural Exposure Field

Table 3: **Comparison on Eyeful Tower.** Also quantitatively, we find that our method performs best compared to state-of-the-art baselines that all share the same ZipNeRF [4] backbone.

	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
Ignore Exposure	16.72	0.682	0.444
Affine GLO [4]	20.13	0.815	0.263
GLO [21]	21.20	0.824	0.298
HDRNeRF* [15]	22.82	0.836	0.311
Ours	26.48	0.876	0.234

Table 4: **Ablation on Eyeful Tower.** We ablate our two criteria for the exposure field optimization (w/o Well-Exposedness and w/o Saturation), our regularization strategy (w/o Regularization), and the affine GLO embeddings (w/o A-GLO).

	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
w/o Well-Exposedness	25.92	0.868	0.247
w/o Saturation	24.30	0.867	0.241
w/o Regularization	24.84	0.856	0.258
w/o A-GLO	27.44	0.854	0.306
Ours	26.48	0.876	0.234

Next, we evaluate how well our method performs at view synthesis with 3D consistent appearance on room- and apartment-sized scenes with our neural exposure field. In contrast to before, the task is not to reproduce the appearance at an input exposure, but rather to learn consistent and well-exposed appearance across the entire scene.

Quantitative Results. We find that our method performs best compared to baselines in all metrics (see Tab. 3). In PSNR and SSIM, HDRNeRF* [15] performs second best and we improve over it significantly by 57% in MSE (+3.7 PSNR, +0.04 SSIM). In LPIPS, affine GLO [3] performs second best and we improve over it by 12% (−0.03 LPIPS).

Qualitative Results. Qualitatively, we observe a similar trend (see Fig. 7). In particular, ignoring exposure leads to floating artifacts and severe scene degradation. Further, all remaining baselines exhibit over- and underexposure in various parts of the scene and lose fine details. In contrast, our method produces well-exposed colors for the entire scene including fine details and far away regions.

Ablation. In Tab. 4, we ablate the main components of our method. We find that both criteria, well-exposedness as well as saturation, are required to achieve high-quality results. Without the well-exposedness criterion, especially the LPIPS metric drops, proving that well-exposed colors are perceptually very important. On the other hand, without the saturation criterion, the PSNR metric drops, demonstrating its relevance for faithfully reconstructing well-fused colors (GT). If we remove our proposed regularization, the neural exposure field predictions do not generalize as well to novel views, causing a performance drop. Finally, without the affine GLO embeddings, we find that while PSNR slightly increases, both SSIM and LPIPS worsen significantly due to overall more blurry results. Ultimately, we conclude that all components of our method are crucial to achieve the best performance.

In-the-Wild Captures. Finally in Fig. 8, we additionally show qualitative results for the in-the-wild phone capture statue from [49]. We observe that while the input (both train and test) images exhibit strong exposure changes, our method is able to produce a 3D consistent exposure that in turn leads to visually appealing, 3D consistent view synthesis. Crucially, compared to prior works, our method does not require exposure as input at test time nor a reference target appearance created by an artist with professional software.

Large-Scale Reconstruction. In Fig. 9 and 10, we additionally report qualitative results on Alameda, a house-sized scene with varying input exposure, from the ZipNeRF dataset [4]. For all methods, we use the same ZipNeRF [4] backbone. We find that ignoring the input exposure leads to degenerate view synthesis. Optimizing affine GLO embeddings [4, 21] improves the overall quality but the renderings can still suffer from over- and underexposure. Our method, in contrast, produces 3D consistent and well-exposed colors for all parts of the scene, while not requiring a complex multi-exposure capture as input. It is worth noting that in Fig. 9 and 10, our method improves over the ground truth view that was captured with a single exposure value.

3D Exposure. While in the traditional sense, exposure is a camera-dependent property, our method's "optimal exposure" is a conceptual departure acting as a spatially-varying variable. It is not directly a physical property but rather a learned representation that guides our model to produce high-quality, well-exposed images, similar to how a photographer might locally adjust exposure in high dynamic range photography. By learning a 3D exposure field, our model finds a per-point exposure value that prevents clipping and under or over-saturation for each point.

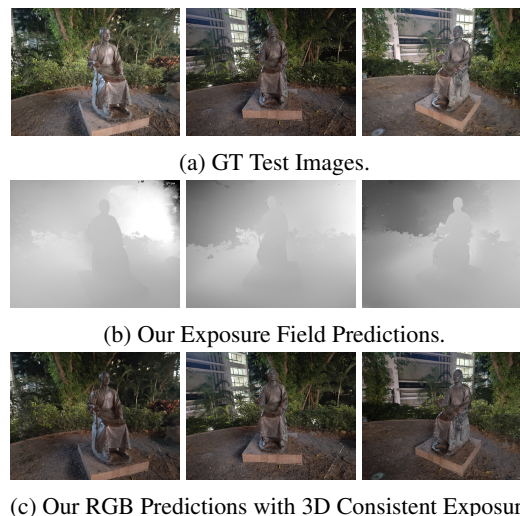


Figure 8: **In-the-Wild Captures.** For in-the-wild captures [49], both training and test images exhibit strong exposure changes (8a). Our method learns a 3D consistent exposure field (8b) resulting in 3D consistent high-quality view synthesis (8c).

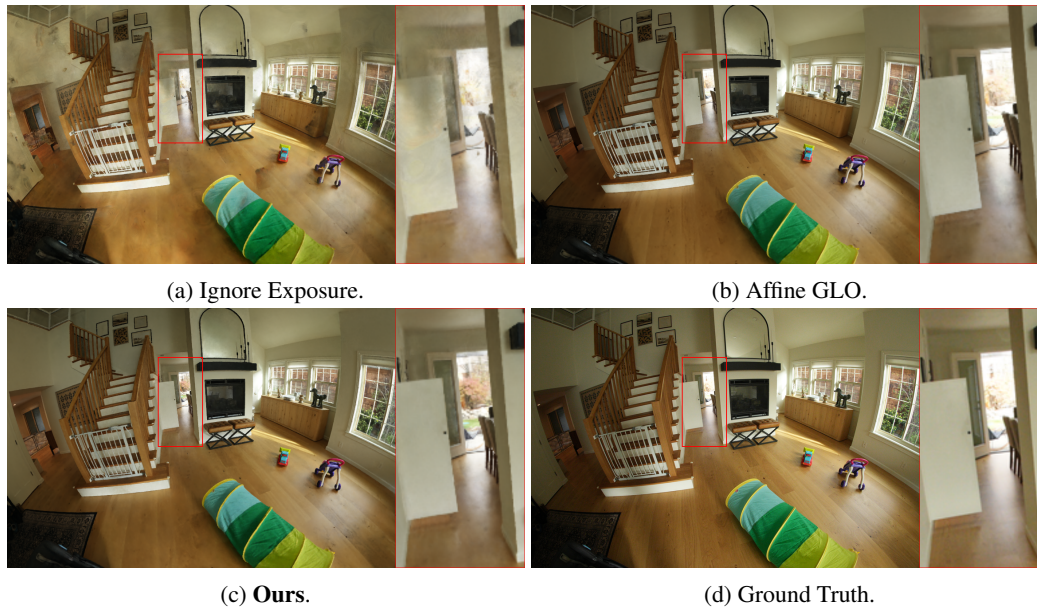


Figure 9: **Large-Scale View Synthesis.** While ignoring the input exposure (9a) leads to degenerate view synthesis, optimizing affine GLO embeddings [4, 21] (9b) improves results but output images still suffer from over- and underexposure. In contrast, our method (9c) achieves 3D consistent and well-exposed color for the entire large-scale scene without requiring a complex multi-exposure capture, and even improves over the GT test view that was captured with a single exposure (9d).



Figure 10: **High-Dynamic Range.** While input train and test views might show over- or underexposure (10a) as no complex multi-exposure capture was performed, our model achieves well-exposed colors (10b) for the entire scene thanks to the predictions of the 3D neural exposure field (10c).

Limitations. While our method produces state-of-the-art view synthesis for scenes with varying exposure, results might degrade for extreme lighting conditions such as very low-light or extreme over-exposed captures as well as for complex lighting effects such as semi-transparency and strong reflections.

5 Conclusion

We presented Neural Exposure Fields (NExF), a novel method for view synthesis that produces high-quality 3D-consistent appearances for high dynamic range scenarios. The key idea is to learn a 3D neural exposure field from 2D observations by considering a pixel’s well-exposedness and saturation for backpropagation, and to train it jointly with our neural scene representation with a novel latent exposure conditioning. In contrast to previous works, our method does not require HDR captures nor target appearances produced by professional artists and costly software. We find that our method produces high-quality scene reconstructions with well-exposed colors for all parts of the scene, even in challenging high dynamic range scenarios such as indoor rooms with large window fronts overlooking outdoor areas. Also quantitatively, we find that our approach leads to state-of-the-art performance improving by more than 55% over the best-performing baseline.

Acknowledgments. We would like to thank Peter Zhizhin, Peter Hedman, and Daniel Duckworth for fruitful discussions and advice, and Cengiz Oztireli for reviewing the draft.

References

- [1] Adobe. Adobe lightroom. <https://lightroom.adobe.com/>, 2017.
- [2] Jonathan T. Barron, Ben Mildenhall, Matthew Tancik, Peter Hedman, Ricardo Martin-Brualla, and Pratul P. Srinivasan. Mip-NeRF: A Multiscale Representation for Anti-Aliasing Neural Radiance Fields. *Int. Conf. Comput. Vis.*, 2021.
- [3] Jonathan T. Barron, Ben Mildenhall, Dor Verbin, Pratul P. Srinivasan, and Peter Hedman. Mip-NeRF 360: Unbounded Anti-Aliased Neural Radiance Fields. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022.
- [4] Jonathan T. Barron, Ben Mildenhall, Dor Verbin, Pratul P. Srinivasan, and Peter Hedman. Zip-NeRF: Anti-Aliased Grid-Based Neural Radiance Fields. *Int. Conf. Comput. Vis.*, 2023.
- [5] Piotr Bojanowski, Armand Joulin, David Lopez-Paz, and Arthur Szlam. Optimizing the Latent Space of Generative Networks. *ICML*, 2018.
- [6] Yuanhao Cai, Zihao Xiao, Yixun Liang, Minghan Qin, Yulun Zhang, Xiaokang Yang, Yaoyao Liu, and Alan L. Yuille. HDR-GS: Efficient High Dynamic Range Novel View Synthesis at 1000x Speed via Gaussian Splatting. *arXiv*, 2024.
- [7] Eric R. Chan, Connor Z. Lin, Matthew A. Chan, Koki Nagano, Boxiao Pan, Shalini De Mello, Orazio Gallo, Leonidas Guibas, Jonathan Tremblay, Sameh Khamis, Tero Karras, and Gordon Wetzstein. Efficient Geometry-aware 3D Generative Adversarial Networks. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022.
- [8] Zhiqin Chen and Hao Zhang. Learning Implicit Fields for Generative Shape Modeling. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2019.
- [9] Ziteng Cui, Lin Gu, Xiao Sun, Xianzheng Ma, Yu Qiao, and Tatsuya Harada. Aleth-nerf: Illumination adaptive nerf with concealing field assumption. In *AAAI*, 2024.
- [10] Paul E. Debevec and Jitendra Malik. Recovering High Dynamic Range Radiance Maps from Photographs. *SIGGRAPH*, 1997.
- [11] Daniel Duckworth, Peter Hedman, Christian Reiser, Peter Zhizhin, Jean-François Thibert, Mario Lucic, Richard Szeliski, and Jonathan T. Barron. SMERF: Streamable Memory Efficient Radiance Fields for Real-Time Large-Scene Exploration. *SIGGRAPH*, 2024.
- [12] Thibault Groueix, Matthew Fisher, Vladimir G Kim, Bryan C Russell, and Mathieu Aubry. A Papier-Mâché Approach to Learning 3D Surface Generation. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2018.
- [13] Yue Guo, Haoxiang Liao, Haibin Ling, and Bingyao Huang. NeuroPump: Simultaneous Geometric and Color Rectification for Underwater Images. *arXiv*, 2024.
- [14] HDRsoft. Photomatix pro 6. <https://www.hdrsoft.com/>, 2003.
- [15] Xin Huang, Qi Zhang, Ying Feng, Hongdong Li, Xuan Wang, and Qing Wang. HDR-NeRF: High Dynamic Range Neural Radiance Fields. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022.
- [16] Xin Huang, Qi Zhang, Ying Feng, Hongdong Li, and Qing Wang. LTM-NeRF: Embedding 3D Local Tone Mapping in HDR Neural Radiance Field. *IEEE Trans. Pattern Anal. Mach. Intell.*, 2024.
- [17] James T. Kajiya and Brian Von Herzen. Ray Tracing Volume Densities. *SIGGRAPH*, 1984.
- [18] Bernhard Kerbl, Georgios Kopanas, Thomas Leimkühler, and George Drettakis. 3D Gaussian Splatting for Real-Time Radiance Field Rendering. *SIGGRAPH*, 2023.
- [19] Zhaoshuo Li, Thomas Müller, Alex Evans, Russell H Taylor, Mathias Unberath, Ming-Yu Liu, and Chen-Hsuan Lin. Neuralangelo: High-Fidelity Neural Surface Reconstruction. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2023.
- [20] Chen-Hsuan Lin, Jun Gao, Luming Tang, Towaki Takikawa, Xiaohui Zeng, Xun Huang, Karsten Kreis, Sanja Fidler, Ming-Yu Liu, and Tsung-Yi Lin. Magic3D: High-Resolution Text-to-3D Content Creation. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2023.

- [21] Ricardo Martin-Brualla, Noha Radwan, Mehdi S. M. Sajjadi, Jonathan T. Barron, Alexey Dosovitskiy, and Daniel Duckworth. NeRF in the Wild: Neural Radiance Fields for Unconstrained Photo Collections. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2021.
- [22] Daniel Maturana and Sebastian Scherer. VoxNet: A 3D Convolutional Neural Network for Real-Time Object Recognition. *IROS*, 2015.
- [23] Tom Mertens, Jan Kautz, and Frank Van Reeth. Exposure Fusion. *PG*, 2007.
- [24] Lars Mescheder, Michael Oechsle, Michael Niemeyer, Sebastian Nowozin, and Andreas Geiger. Occupancy Networks: Learning 3D Reconstruction in Function Space. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2019.
- [25] Ben Mildenhall, Pratul P. Srinivasan, Rodrigo Ortiz-Cayon, Nima Khademi Kalantari, Ravi Ramamoorthi, Ren Ng, and Abhishek Kar. Local light field fusion: Practical view synthesis with prescriptive sampling guidelines. *SIGGRAPH*, 2019.
- [26] Ben Mildenhall, Pratul P. Srinivasan, Matthew Tancik, Jonathan T. Barron, Ravi Ramamoorthi, and Ren Ng. NeRF: Representing Scenes as Neural Radiance Fields for View Synthesis. *Eur. Conf. Comput. Vis.*, 2020.
- [27] Ben Mildenhall, Peter Hedman, Ricardo Martin-Brualla, Pratul P. Srinivasan, and Jonathan T. Barron. NeRF in the Dark: High Dynamic Range View Synthesis from Noisy Raw Images. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2022.
- [28] Thomas Müller, Alex Evans, Christoph Schied, and Alexander Keller. Instant Neural Graphics Primitives with a Multiresolution Hash Encoding. *SIGGRAPH*, 2022.
- [29] Michael Niemeyer and Andreas Geiger. GIRAFFE: Representing Scenes as Compositional Generative Neural Feature Fields. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2021.
- [30] Michael Niemeyer, Lars Mescheder, Michael Oechsle, and Andreas Geiger. Occupancy Flow: 4D Reconstruction by Learning Particle Dynamics. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2019.
- [31] Michael Niemeyer, Lars M. Mescheder, Michael Oechsle, and Andreas Geiger. Differentiable Volumetric Rendering: Learning Implicit 3D Representations Without 3D Supervision. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2020.
- [32] Michael Niemeyer, Fabian Manhardt, Marie-Julie Rakotosaona, Michael Oechsle, Daniel Duckworth, Rama Gosula, Keisuke Tateno, John Bates, Dominik Kaeser, and Federico Tombari. RadSplat: Radiance Field-Informed Gaussian Splatting for Robust Real-Time Rendering with 900+ FPS. *3DV*, 2025.
- [33] Jeong Joon Park, Peter Florence, Julian Straub, Richard Newcombe, and Steven Lovegrove. DeepSDF: Learning Continuous Signed Distance Functions for Shape Representation. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2019.
- [34] Keunhong Park, Utkarsh Sinha, Jonathan T Barron, Sofien Bouaziz, Dan B Goldman, Steven M Seitz, and Ricardo Martin-Brualla. Nerfies: Deformable Neural Radiance Fields. *Int. Conf. Comput. Vis.*, 2021.
- [35] Keunhong Park, Utkarsh Sinha, Peter Hedman, Jonathan T. Barron, Sofien Bouaziz, Dan B Goldman, Ricardo Martin-Brualla, and Steven M. Seitz. HyperNeRF: A Higher-Dimensional Representation for Topologically Varying Neural Radiance Fields. *SIGGRAPH*, 2021.
- [36] Songyou Peng, Michael Niemeyer, Lars Mescheder, Marc Pollefeys, and Andreas Geiger. Convolutional Occupancy Networks. *Eur. Conf. Comput. Vis.*, 2020.
- [37] Songyou Peng, Chiyu Jiang, Yiyi Liao, Michael Niemeyer, Marc Pollefeys, and Andreas Geiger. Shape As Points: A Differentiable Poisson Solver. *NeurIPS*, 2021.
- [38] Ben Poole, Ajay Jain, Jonathan T Barron, and Ben Mildenhall. DreamFusion: Text-to-3D using 2D Diffusion. *Int. Conf. Learn. Represent.*, 2022.
- [39] Charles R Qi, Hao Su, Matthias Nießner, Angela Dai, Mengyuan Yan, and Leonidas J Guibas. Volumetric and Multi-View CNNs for Object Classification on 3D Data. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2016.
- [40] Charles R Qi, Hao Su, Kaichun Mo, and Leonidas J Guibas. PointNet: Deep Learning on Point Sets for 3D Classification and Segmentation. *IEEE Conf. Comput. Vis. Pattern Recog.*, 2017.
- [41] Charles Ruizhongtai Qi, Li Yi, Hao Su, and Leonidas J Guibas. PointNet++: Deep Hierarchical Feature Learning on Point Sets in a Metric Space. *NeurIPS*, 2017.

- [42] Marie-Julie Rakotosaona, Fabian Manhardt, Diego Martín Arroyo, Michael Niemeyer, Abhijit Kundu, and Federico Tombari. NeRFMeshing: Distilling Neural Radiance Fields into Geometrically-Accurate 3D Meshes. *3DV*, 2024.
- [43] Christian Reiser, Richard Szeliski, Dor Verbin, Pratul P. Srinivasan, Ben Mildenhall, Andreas Geiger, Jonathan T. Barron, and Peter Hedman. MERF: Memory-Efficient Radiance Fields for Real-time View Synthesis in Unbounded Scenes. *SIGGRAPH*, 2023.
- [44] Katja Schwarz, Yiyi Liao, Michael Niemeyer, and Andreas Geiger. GRAF: Generative Radiance Fields for 3D-Aware Image Synthesis. *NeurIPS*, 2020.
- [45] Vincent Sitzmann, Michael Zollhöfer, and Gordon Wetzstein. Scene Representation Networks: Continuous 3D-Structure-Aware Neural Scene Representations. *NeurIPS*, 2019.
- [46] Christina Tsalicoglou, Fabian Manhardt, Alessio Tonioni, Michael Niemeyer, and Federico Tombari. TextMesh: Generation of Realistic 3D Meshes From Text Prompts. *3DV*, 2024.
- [47] Min Wang, Xin Huang, Guoqing Zhou, Qifeng Guo, and Qing Wang. Bright-NeRF: Brightening Neural Radiance Field with Color Restoration from Low-light Raw Images. *arXiv*, 2024.
- [48] Nanyang Wang, Yinda Zhang, Zhuwen Li, Yanwei Fu, Wei Liu, and Yu-Gang Jiang. Pixel2Mesh: Generating 3D Mesh Models from Single RGB Images. *Eur. Conf. Comput. Vis.*, 2018.
- [49] Yuehao Wang, Chaoyi Wang, Bingchen Gong, and Tianfan Xue. Bilateral Guided Radiance Field Processing. *SIGGRAPH*, 2024.
- [50] Yiheng Xie, Towaki Takikawa, Shunsuke Saito, Or Litany, Shiqin Yan, Numair Khan, Federico Tombari, James Tompkin, Vincent Sitzmann, and Srinath Sridhar. Neural Fields in Visual Computing and Beyond. *CFG*, 2022.
- [51] Linning Xu, Vasu Agrawal, William Laney, Tony Garcia, Aayush Bansal, Changil Kim, Samuel Rota Bulò, Lorenzo Porzi, Peter Kotschieder, Aljaž Božič, Dahua Lin, Michael Zollhöfer, and Christian Richardt. VR-NeRF: High-Fidelity Virtualized Walkable Spaces. *SIGGRAPH Asia*, 2023.
- [52] Lior Yariv, Yoni Kasten, Dror Moran, Meirav Galun, Matan Atzmon, Basri Ronen, and Yaron Lipman. Multiview Neural Surface Reconstruction by Disentangling Geometry and Appearance. *NeurIPS*, 2020.
- [53] Lior Yariv, Peter Hedman, Christian Reiser, Dor Verbin, Pratul P. Srinivasan, Richard Szeliski, Jonathan T. Barron, and Ben Mildenhall. BakedSDF: Meshing Neural SDFs for Real-Time View Synthesis. *SIGGRAPH*, 2023.
- [54] Yang Zou, Xingyuan Li, Zhiying Jiang, and Jinyuan Liu. Enhancing neural radiance fields with adaptive multi-exposure fusion: A bilevel optimization approach for novel view synthesis. In *AAAI*, 2024.

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [Yes]

Justification: We introduce the context of our method and the key ideas of our method as well as the main achievements in the introduction and abstract, hence the claims accurately reflect the paper's contribution and scope.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [Yes]

Justification: In main paper (Sec. 4) as well as supplementary.

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [NA] .

Justification: Our manuscript does not include theoretical results.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [\[Yes\]](#)

Justification: We report all required information to perform and reproduce the experiments that we conduct in the paper (see Sec. 3 and Sec. 4). We only draw conclusions from conducted experiments, hence all experimental results and claims can be reproduced.

Guidelines:

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [No]

Justification: Code release not possible right now due to institutional policies.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so “No” is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: All training and test details are given in the manuscript (see Sec. 3 and Sec. 4).

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [No]

Justification: Multiple runs per method and experiment to calculate error bars are infeasible given the computational requirements.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).

- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: Details are given in the manuscript (see Sec. 3).

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: The research conforms with the NeurIPS Code of Ethics.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: Please see supplementary material.

Guidelines:

- The answer NA means that there is no societal impact of the work performed.
- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.

- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [NA] .

Justification: Our manuscript does not pose such risks.

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: All used assets are properly cited and licenses respected (see Sec. 4).

Guidelines:

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.

- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. **New assets**

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [NA] .

Justification: Our paper does not release new assets.

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. **Crowdsourcing and research with human subjects**

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [NA] .

Justification: Our manuscript does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. **Institutional review board (IRB) approvals or equivalent for research with human subjects**

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [NA] .

Justification: Our manuscript does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. Declaration of LLM usage

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigorousness, or originality of the research, declaration is not required.

Answer: [NA] .

Justification: Our method and paper creation did not involve any LLM usage.

Guidelines:

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (<https://neurips.cc/Conferences/2025/LLM>) for what should or should not be described.